





curvano

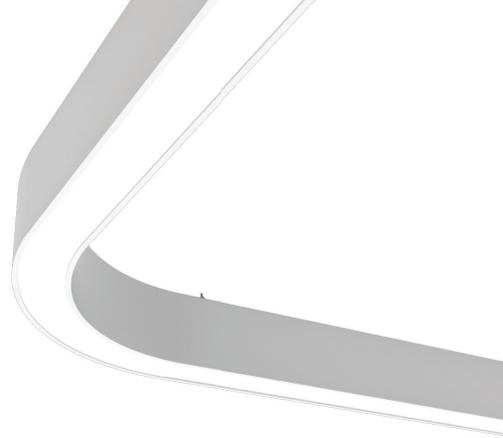

Put the “Arch” in Architectural Lighting.

Curvano expands on the existing linear slot portfolio of Amerlux, further putting the “arch” in first-class architectural lighting. The 2.5” profile is available in 5 diameter options, as either a curved corner or full 360° circle. With the ability to fit in seamlessly anywhere on your project, from the simplest design to the most complex, Curvano provides infinite design and lighting patterns options: circular, serpentine and rounded-circle displays included. Trust Curvano to provide the freedom to create—and maintain—dynamic, head-turning spaces.

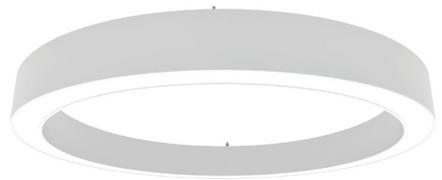

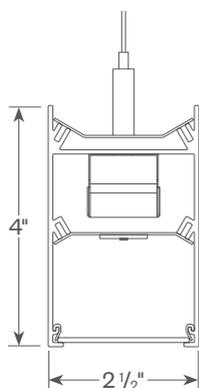

Application:

Commercial, Retail, Hospitality

Our latest LED linear product puts the “arch” in first-class architectural lighting with five curved diameter corner options of varying angle options and three circular selections—all in standard and custom request orders. Available in recessed and pendant mount, Curvano offers a 2.5” aperture and superior color-rendering capabilities—all of which provides the autonomy to add stunning dimension and flexible, comfortable illumination to any interior architectural design.

PENDANT

Type: Direct, Direct/Indirect

Wattage: 3W-10W

Lumen output: Up to 7,869 Lm, 106 Lm/W (DL/UL 10W/10W, 4’)

Color Temp: 2700K, 3000K, 3500K, 4000K

CRI: 83 typ., 90+ typ.

Dimming: 0-10V, 1% dim (standard)

Lutron Hi-lume® 2 wire (120V only)

Lutron Hi-lume® EcoSystem, 1% dim, fade to off

Lutron Hi-lume® 5 Series

DALI dimming, 0.1% dim

Finish: HW - high reflectance matte white

BT - black texture

WT - white texture

45°	
Diameter	Arc Length
D43	16.89”
D72	28.08”
D100	39.27”

90°	
Diameter	Arc Length
D22	16.89”
D36	28.18”
D43	33.77”

360°	
Diameter	Arc Length
D22	67.54”
D36	112.72”
D43	135.09”
D72*	224.62”
D100*	314.16”

* shipped as separate 45° fixtures

RECESSED

Type: Direct

Wattage: 3W-10W

Lumen output: Up to 3,059 Lm, 77.6 Lm/W (10W, 4’)

Color Temp: 2700K, 3000K, 3500K, 4000K

CRI: 83 typ., 90+ typ.

Dimming: 0-10V, 1% dim (standard)

Lutron Hi-lume® 2 wire (120V only)

Lutron Hi-lume® EcoSystem, 1% dim, fade to off





Lutron Hi-lume® 5 Series

DALI dimming, 0.1% dim

Finish: HW - high reflectance matte white

BT - black texture

WT - white texture

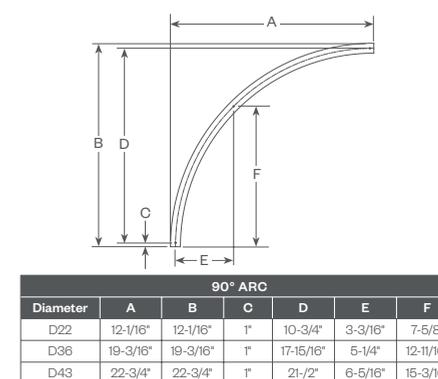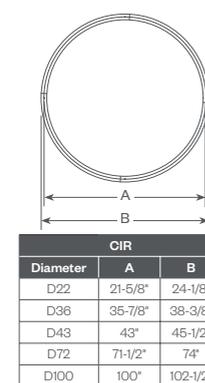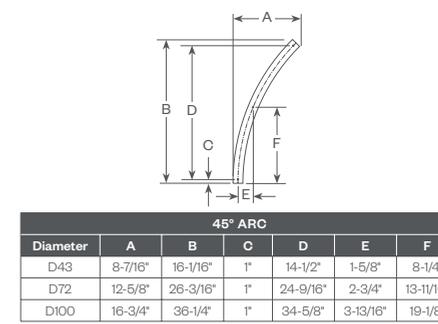

For most updated performance and ordering information visit us at amerlux.com.

© 2020 Amerlux, LLC





amerlux.com

Headquarters

178 Bauer Drive
Oakland, New Jersey 07436 USA
973.882.5010 | Fax 973.882.2605

China Office

Oxidated Carpark 2nd Floor
No. 124 Donghuan Road, Donghuan Jie
Panyu, Guangzhou PRC 511400