

cubebits




Lighting you don't see until you're almost under it

Specifiers and designers looking to make a bold, look-at-me statement with design and performance now have the recessed linear downlights form they have been looking for.

Cubebits. The fixture's 1.5" wide profile is available in 3-cell, 6-cell, 9-cell and 12-cell units and is compatible with grid and flange ceilings for up to 1 1/2" ceiling thickness.


The downlight comes standard with spot, flood and wide flood beam distribution options and dimming capability. The black and white specular finished bezel allows for quiet, comfortable yet required light output.

Easy installation and comfortable light output come together without compromising superior control or performance.

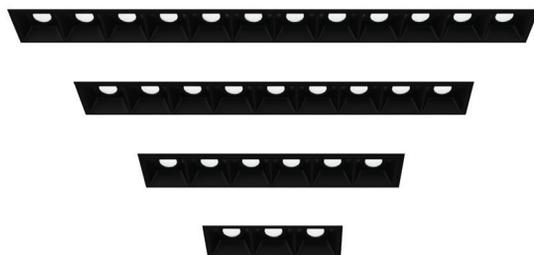





Trimmed

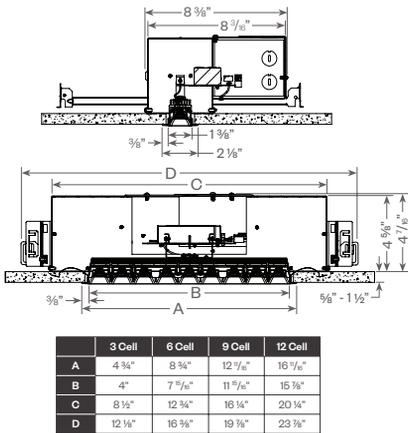

Trimless

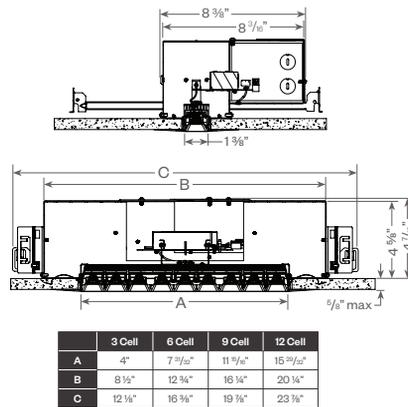

Millwork

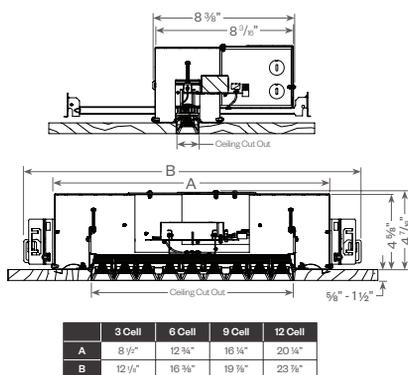

Application:

Commercial, Hospitality, Retail,

CUBEBITS

Type: Recessed Linear Downlight

Wattages: Low (1.25W per cell; not avail. for 3 cell)

Medium (2W per cell; not avail. for use with 3 cell)

High (2.6W per cell; 8W for 3 cell)

Lumen output: 2,208 Lm max

Color Temp: 2700K, 3000K, 3500K, 4000K

CRI: 90+ typ.

Cell: 3, 6, 9, 12

Style: Trimmed, Trimless, Millwork

Beam Spread: Spot, 12°

Flood, 28°

Wide Flood, 47°

Dimming: 0-10V, ELV, HILUME-H-ECO

Louver Finish: White, Black

Finish: Matte White, Matte Black

For most updated performance and ordering information visit us at amerlux.com.

© 2020 Amerlux, LLC

Headquarters

178 Bauer Drive
Oakland, New Jersey 07436 USA
973.882.5010 | Fax 973.882.2605

China Office

Oxidated Carpark 2nd Floor
No. 124 Donghuan Road, Donghuan Jie
Panyu, Guangzhou PRC 511400