




**GRUV-FR-FLG**

Gyp Board Ceiling

WARNING - RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY. FIXTURE IS INTENDED FOR INSTALLATION IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE, LOCAL AND FEDERAL SPECIFICATIONS. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING .  
RETAIN THESE INSTRUCTIONS FOR MAINTENANCE REFERENCE.

**Suspension Points**

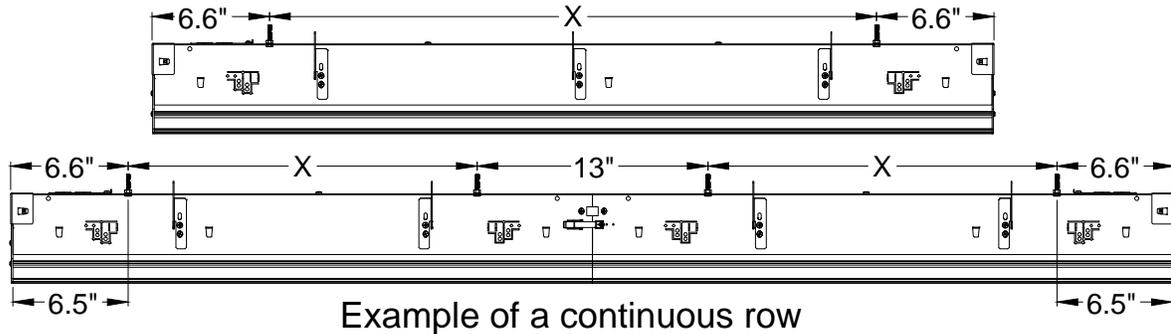


Example of a continuous row

**I. Individual Installation - (Individual fixture shipped as shown.)**

Hanging the fixture via threaded rods :


1. Remove reflector assembly (See next page).
2. Remove  $\frac{5}{16}$ " KO's.
3. Insert  $\frac{1}{4}$ -20 Bolt and secure with nut.  
(supplied by others)
4. Secure to structure via coupling  
(supplied by others)
5. Re-insert reflector assembly and secure

**FIXTURE MUST BE  
INSTALLED PRIOR TO  
CEILING CONSTRUCTION.**

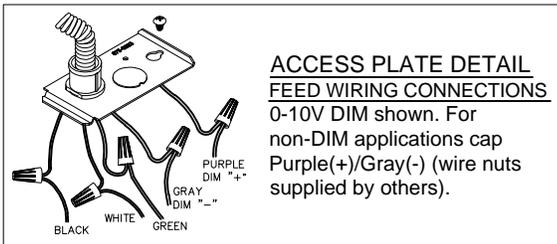

1. Hang fixture via wire and/or threaded rods.
2. Once the fixture is secure, connect power via  $\varnothing.875$  knockout in wiring access plate. Splice to harness according to code.

SUPPORT METHOD  
(SUPPLIED BY OTHERS)

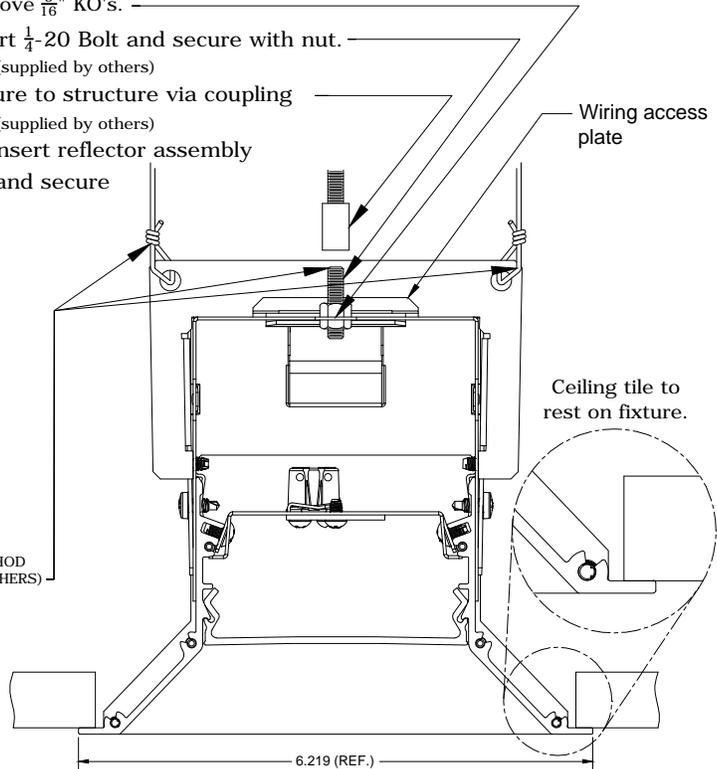


**MAINTENANCE**


1. **Install correct LEDs.** See sheet 689-0394 for LED Replacement info.
2. **Driver maintenance.** Drivers are mounted to housing. Remove the screws mounting the reflector to access.




## II. Assembling Continuous Rows-

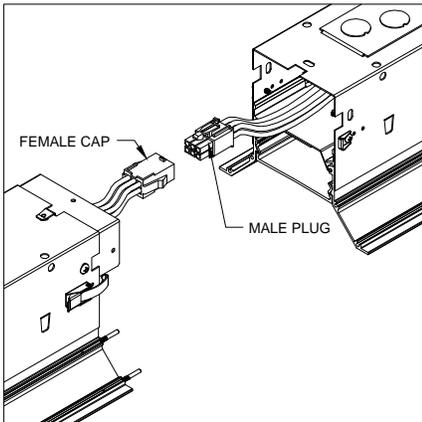

**A:** Connect fixture to previous fixture's power via quick connect.

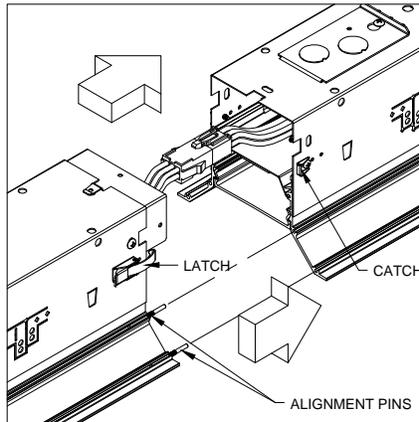


**B:** Line up the fixtures using alignment pins. When fixtures are aligned, secure with catch / latch.

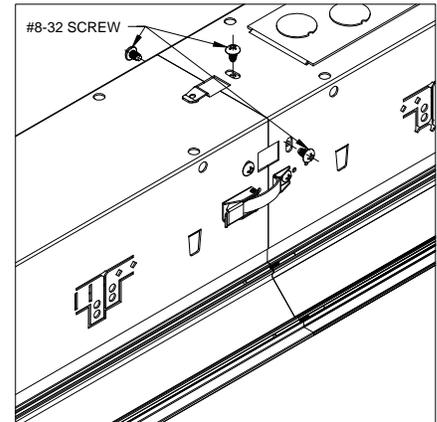


**C:** Once latched, secure fixture with #8-32 screws.

### Reflector Assembly Removal - (Only required to access driver. Power down fixture before doing ANY maintenance.)

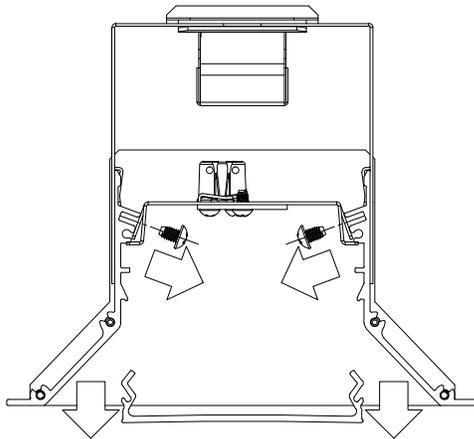

**1. Remove lens.**  
**2. Remove reflector mounting screws.**

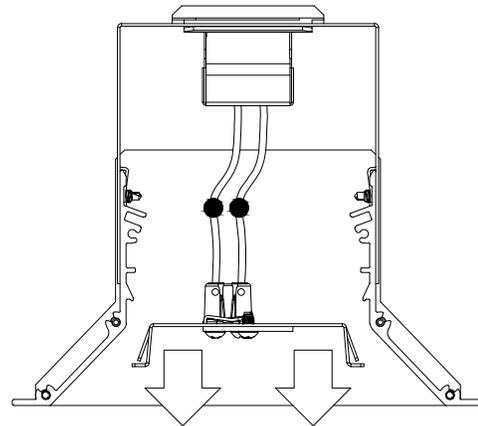

**3. Remove reflector assembly.**  
**4. Disconnect LED harness.**

**To reassemble fixture, follow instructions in reverse.**

**MAKE SURE TO DISCONNECT ALL ELECTRICAL CONNECTIONS BEFORE SERVICING.**

- 1. Install correct LEDs.** See sheet 689-0394 for LED Replacement info.
- 2. Driver maintenance.** Drivers are mounted to housing. Remove the screws mounting the reflector to access.