

# cubebits




## Lighting you don't see until you're almost under it

Specifiers and designers looking to make a bold, look-at-me statement with design and performance now have the recessed linear downlights form they have been looking for.

Cubebits. The fixture's 1.5" wide profile is available in 3-cell, 6-cell, 9-cell and 12-cell units and is compatible with grid and flange ceilings for up to 1 1/2" ceiling thickness.


The downlight comes standard with spot, flood and wide flood beam distribution options and dimming capability. The black and white specular finished bezel allows for quiet, comfortable yet required light output.

Easy installation and comfortable light output come together without compromising superior control or performance.

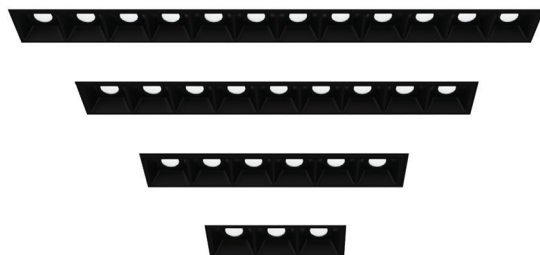




### Trimmed

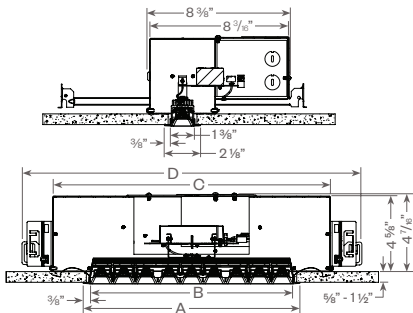


	3 Cell	6 Cell	9 Cell	12 Cell
A	4 3/4"	8 3/4"	12 7/16"	16 7/16"
B	4"	7 7/16"	11 7/16"	15 7/16"
C	8 1/2"	12 3/4"	16 1/4"	20 1/4"
D	12 1/4"	16 3/4"	19 7/8"	23 3/8"

### Trimless

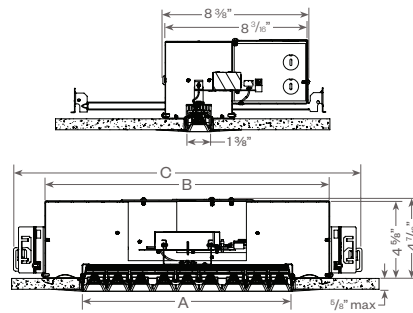

	3 Cell	6 Cell	9 Cell	12 Cell
A	4"	7 7/16"	11 7/16"	15 7/16"
B	8 1/2"	12 3/4"	16 1/4"	20 1/4"
C	12 1/4"	16 3/4"	19 7/8"	23 3/8"

### Millwork

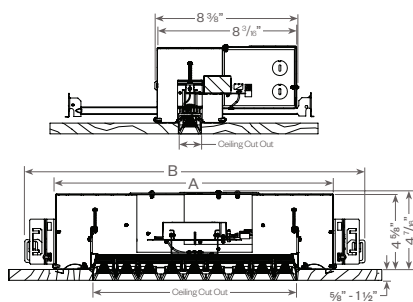

	3 Cell	6 Cell	9 Cell	12 Cell
A	8 1/2"	12 3/4"	16 1/4"	20 1/4"
B	12 1/4"	16 3/4"	19 7/8"	23 3/8"

## Application:

# Commercial, Hospitality, Retail,

## CUBEBITS

**Type:** Recessed Linear Downlight

**Wattages:** Low (1.25W per cell; not avail. for 3 cell)

Medium (2W per cell; not avail. for use with 3 cell)

High (2.6W per cell; 8W for 3 cell)

**Lumen output:** 2,208 Lm max

**Color Temp:** 2700K, 3000K, 3500K, 4000K

**CRI:** 90+ typ.

**Cell:** 3, 6, 9, 12

**Style:** Trimmed, Trimless, Millwork

**Beam Spread:** Spot, 12°

Flood, 28°

Wide Flood, 47°

**Dimming:** 0-10V, ELV, HILUME-H-ECO

**Louver Finish:** White, Black

**Finish:** Matte White, Matte Black

For most updated performance and ordering information visit us at [amerlux.com](http://amerlux.com).

© 2020 Amerlux, LLC

#### Headquarters

178 Bauer Drive  
Oakland, New Jersey 07436 USA  
973.882.5010 | Fax 973.882.2605

#### China Office

Oxidated Carpark 2nd Floor  
No. 124 Donghuan Road, Donghuan Jie  
Panyu, Guangzhou PRC 511400