
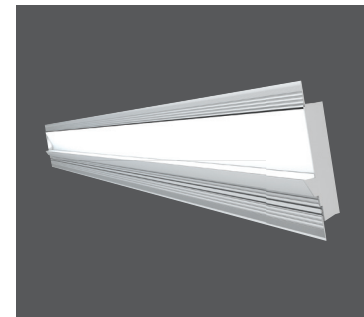


FINO®


STUNNINGLY THIN. A BEAUTIFUL VISUAL IMPRESSION.

Award-winning. Elegant. Gracefully slim. Fino is indirect LED lighting at its most refined.

At only 5/8" deep, Fino runs seamlessly across the walls or ceilings without the need to cut wall studs. It is designed to promote a crisp, comfortable work environment, creating a beautiful visual impression.

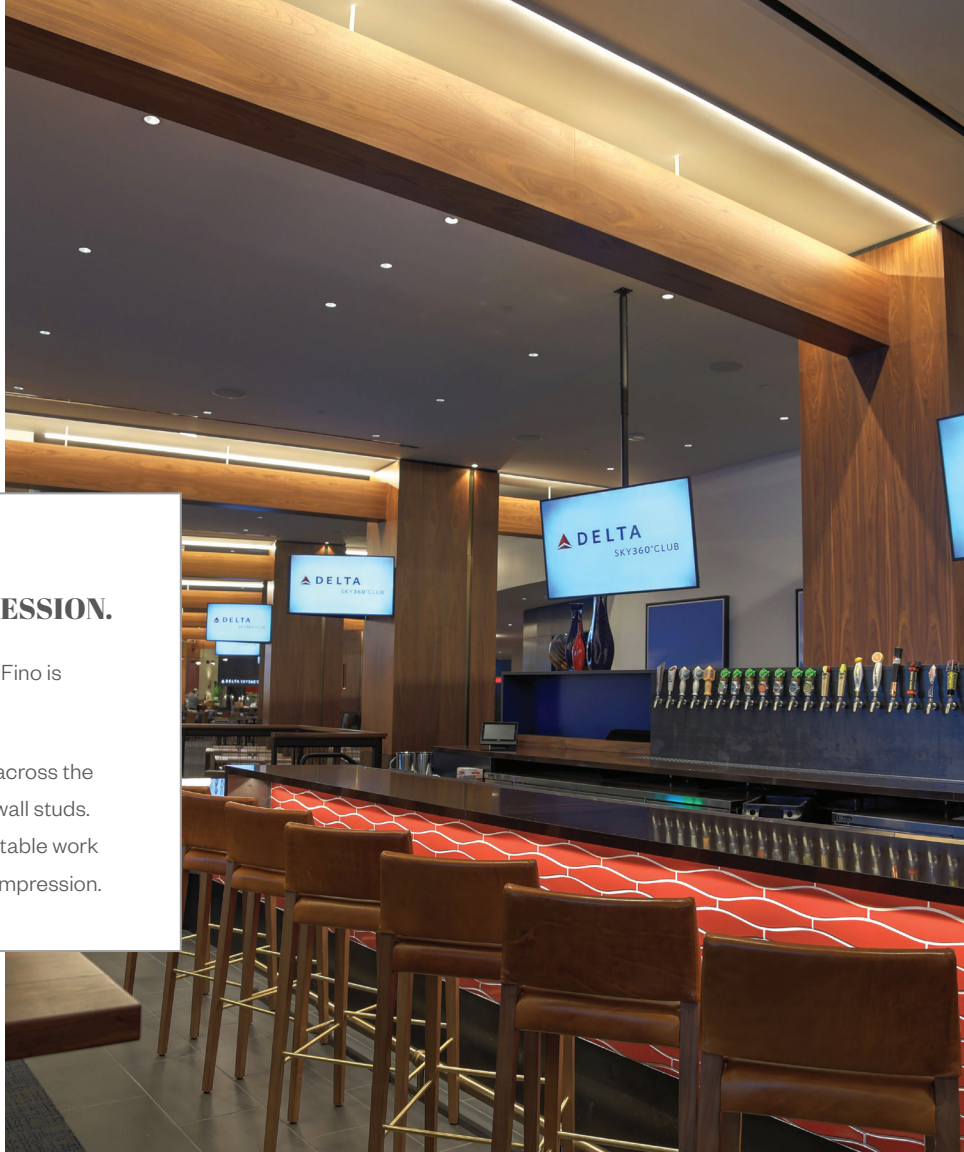

Fino Wall

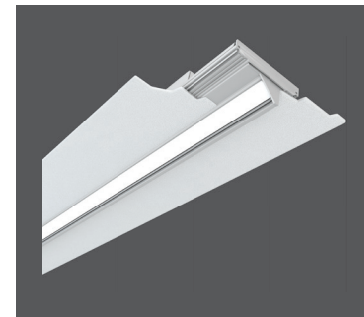

Fino Ceiling

Application: Commercial, Hospitality, Retail, Hospitals

Fino Wall



Wattages/Foot: 6, 12

Delivered Lumens: Up to 3,752

Binning: 3 MacAdam

Color Temp: 2700K-4000K

CRI: 83 typ.

Dimming: 0-10V, Lutron Hi-Lume, DALI

Run Lengths: IND – 18”-8’, CON – 8’

Lens: Performance, Designer

Finish: HW

Fino Healthcare



Wattages/Foot: 6, 12

Delivered Lumens: Up to 3,233

Binning: 3 MacAdam

Color Temp: 2700K-4000K

CRI: 83 typ.

Dimming: 0-10V, Lutron Hi-Lume, DALI

Run Lengths: IND – 18”-8’, CON – 8’

Lens: Acrylic Wipe Down Lens

Finish: HW

Fino Flanged



Wattages/Foot: 6, 12

Delivered Lumens: Up to 3,752

Binning: 3 MacAdam

Color Temp: 2700K-4000K

CRI: 83 typ.

Dimming: 0-10V, Lutron Hi-Lume, DALI

Run Lengths: IND – 18”-8’, CON – 8’

Lens: Designer

Finish: HW

Fino Ceiling



Wattages/Foot: 6, 12

Delivered Lumens: Up to 2,528

Binning: 3 MacAdam

Color Temp: 2700K-4000K

CRI: 83 typ.

Dimming: 0-10V, Lutron Hi-Lume, DALI

Run Lengths: IND – 18”-8’, CON – 8’

Lens: Designer

Finish: HW

For most updated performance and ordering information visit us at amerlux.com.



3450 South Sam Houston Pkwy. E., Suite 400
Houston, TX 77047 USA
T: 281.997.5400 | F: 281.997.5441

Headquarters
178 Bauer Drive, Oakland, NJ 07436 USA
T: 973.882.5010 | F: 973.882.2605

amerlux.com
© 2018 Amerlux, LLC

Oxidated Carpark 2nd Floor
No. 124 Donghuan Road, Donghuan Jie
Panyu, Guangzhou PRC 511400