



Reflectors and Shields



FDR (Faceted Downlight Reflector)




LL (Light Lid)

Perforated aluminum reflector minimizes light to the upper hemisphere, while providing an aesthetically pleasing glow to the top of the diffuser. Consult factory.

SLL (Solid Light Lid)

Solid aluminum reflector. Consult factory.

Both models are limited to use on the following fixture series: **AO28, ARP23, D730AO, & D730ARP**

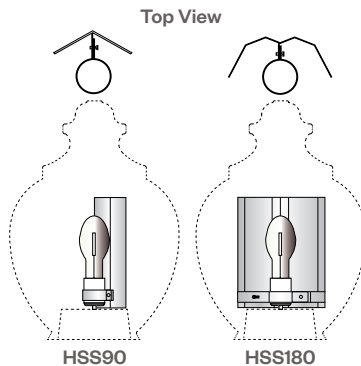

HSS90


HSS180

HSS-90 (90 degree cutoff)

HSS-180 (180 degree cutoff)

House side shields are available to cutoff all direct light through certain horizontal angles. Both models clamp around the socket and are designed to be positioned in the field after installation of the fixture. If ordering for a retrofit application, the socket type must be specified.

Light Control Options

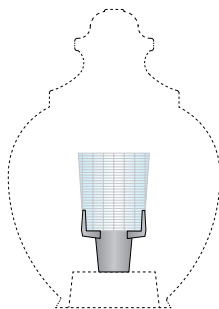


L3 or L5

GLASS REFRACTOR


Borosilicate glass refractor with IES Type III (L3) or Type V (L5) light distribution can be specified in most fixtures that don't have an integral refractive lens. The refractor can be retrofit in existing fixtures without tools or electrical modifications.

Finials




CFIN

Cast aluminum finial



FIN-08

Cast aluminum finial



FIN-760


Cast aluminum finial

Ordering Information:

_____ (finish)	
1	2

Pier Mount Base


Cast aluminum pier mount base. Used as transitional mounting device for attaching a luminaire to a column or another flat horizontal surface. Mounting hardware is not included.



Ordering Information:

_____ (finish)	
1	2

Photocell



Dusk to dawn photocell. Available for 120V-277V.

PCL