

# 5" Direct Burial Series



## Features

Light poles with embedded base mounting. Provides for easier installation, cost and time savings. They eliminate the need for expensive anchor base footings and bases. Ideal for parking lots, streets, roadways and more. Accepts a wide variety of Amerlux post top luminaires.

### Choice of extruded shafts:

- 5" to 3" tapered, 0.125 wall
- 5" OD fluted (12 flutes), 0.125 wall
- 5" OD smooth round, 0.125 wall


A 2x4" handhole with curved lap style aluminum door and two stainless steel self-tapping screws is standard. A grounding provision incorporating a tapped 1/4" 20NC hole is provided opposite the handhole.

### Materials:

- Shaft - Extruded Aluminum (6063-T6)
- Tapered Aluminum (6063-T6)

## PROJECT:

## TYPE:

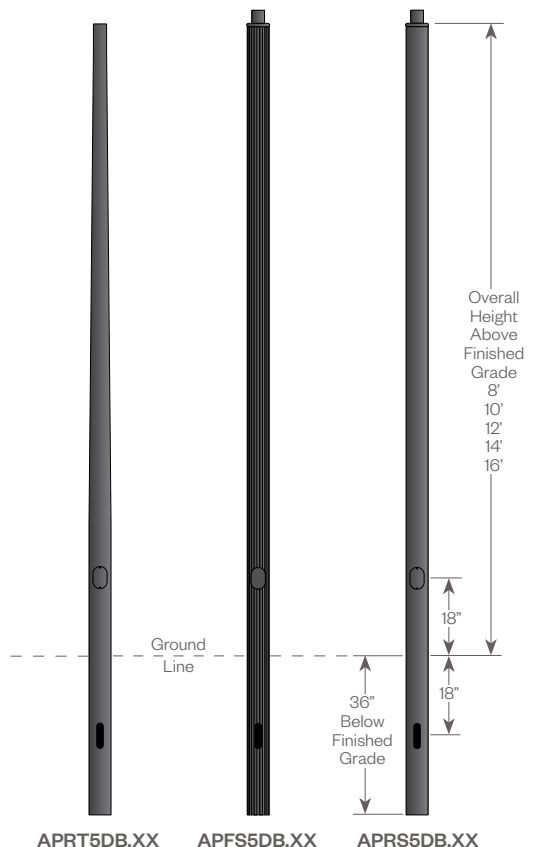

See pgs 3-4 for more details.

## Finish:

Premium quality thermoset polyester powdercoat for a durable finish.

## Accessories:

- Single or double sided field rotatable banner arms
- Flag pole holder
- GFCI - covered ground fault circuit protected duplex outlet
- Two-piece cover placed at pole-ground interface for better aesthetics



# 5" Direct Burial Series



## PROJECT:

## TYPE:

### Pole Ordering Information



- 1** Model  
**APRT5DB** - 5" to 3" O.D. pole, tapered 0.125 wall  
**APFS5DB** - 5" O.D. fluted pole, 0.125 wall  
**APRS5DB** - 5" O.D. smooth pole, 0.125 wall

- 2** Pole Height  
**08** - 8'-0"  
**10** - 10'-0"  
**12** - 12'-0"  
**14** - 14'-0"  
**16** - 16'-0"

- 3** Finish  
**BLK** - satin black  
**CLB** - classic bronze  
**GBZ** - gloss textured bronze  
**GRN** - green  
**GTB** - gloss textured black  
**TBK** - textured black  
**TGR** - gloss textured green  
**CSTM** - custom, consult factory

- 4** Options/Accessories  
**GFCI-TOP** - ground fault circuit protected outlet, placed 6" from the top of pole  
**GFCI-BTM** - ground fault circuit protected outlet, placed 6" above the decorative base at the bottom of the pole  
**LT** - less tenon

### Accessory Ordering Information (Ordered separately)




- 1** Model (all accessories (except 5-COV) below are for non-tapered shafts only)  
**BA18-FRC5** - 18" banner arm, 5" OD shaft  
**BA24-FRC5** - 24" banner arm, 5" OD shaft  
**2BA18-FRC5-180** - double sided 18" banner arms, 5" OD shaft  
**2BA24-FRC5-180** - double sided 24" banner arms, 5" OD shaft  
**FPH-5** - flag pole holder for 5" non-tapered poles  
**5-COV** - two piece cover

# 5" Direct Burial Series



PROJECT:


TYPE:

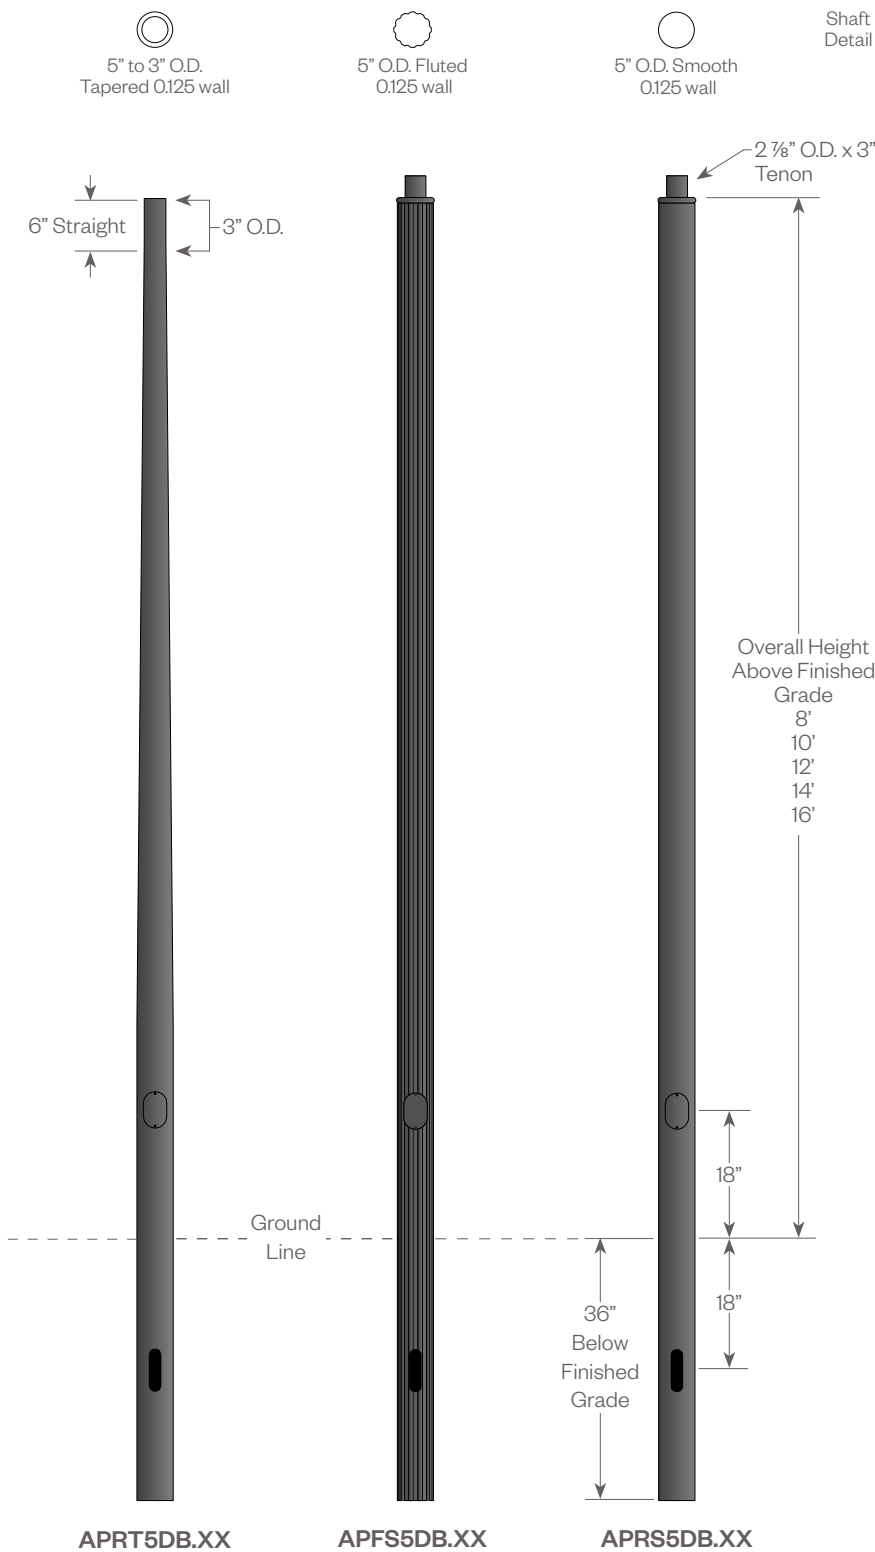

# 5" Direct Burial Series

## PROJECT:

## TYPE:

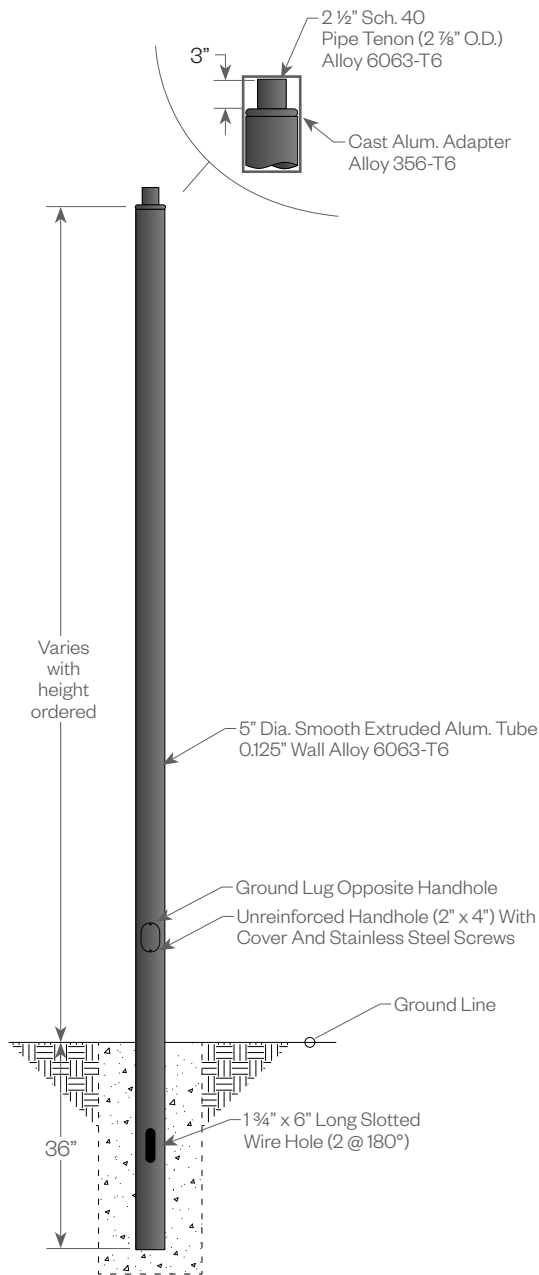

### Finish

The post will be finished with an electrostatically applied thermoset polyester powder coat. Prior to finishing, the parts are thoroughly cleaned. Our powder coat finish is durable, long lasting, attractive and scratch resistant as well as environmentally friendly. We offer 7 stock finishes or hundreds of special order colors including custom matching for existing projects (additional charges apply).

**BLK** - Satin Black  
**CLB** - Classic Bronze  
**GBZ** - Gloss Textured Bronze  
**GRN** - Green

**GTB** - Gloss Textured Black  
**TBK** - Textured Black  
**TGR** - Gloss Textured Green

### Accessories

#### Banner Arms

Single or double sided field rotatable banner arms.

**BA18** (18") or **BA24** (24") banner arms

**FRC5** (5"OD shaft)

Add a (2) for a double arm.

Example: **2BA18-FRC5-180**

*See ordering guide for configurations*



#### FPH-5

Extruded aluminum holder for 1" OD flag poles.

Available for 5" OD non-tapered pole.



#### GFCI - Top/Bottom

Covered ground fault circuit protected duplex outlet. Can be placed near top of pole or above the decorative base at the bottom of the pole. Wet while in use rated.



#### 5 - Cover

Two piece cover is fabricated from stamped and formed aluminum.

