

APQ200RDB Series

Direct Burial



PROJECT:

TYPE:

Features

The APQ Family includes a broad selection of decorative aluminum poles with a typical lead time of just (6) weeks. The APQ poles are the right choice for projects that require a quick fulfillment to the site and don't need customization of the poles.

Product Overview

Type: Exterior Lighting Pole for Amerlux Post Top Luminaires
Pole Height: 8', 10', 12', 14', 16'
Shaft Size: 4" OD, 5" OD



APQ20xRDB

Certifications



Fixture Summary

Construction:

- Strong, lightweight and easy to install
- Extruded aluminum shaft
- 3" OD x 3" tall tenon included for luminaire mounting
- Access door for wiring secured with stainless steel screws
- Ground lug included (*accessed by removing access door*)

Materials:

- Shaft - Extruded aluminum (A6061-T6)
- Tenon - Cast aluminum (A356)
- Hardware - Stainless steel

Finish:

The post will be finished with an electrostatically applied polyester powder coat suitable for exterior use. The poles are pretreated using industry standard environmentally responsible processes for a long lasting and durable finish.

Anchorage:

- Poles are designed for direct burial
Final determination of burial depth is determined by architect or local code specifications.
The dimensions and ordering nomenclature call out the expected above ground height.

APQ200RDB Series

Direct Burial



PROJECT:

TYPE:

Ordering Information - Pole

1	2	3	4
1 Model	2 Pole Height	3 Finish	4 Options
APQ203RDB 4" O.D. fluted pole, 0.125 wall	08 8'-0"	BLK satin black	(3" OD x 3" tall tenon is standard)
APQ204RDB 4" O.D. smooth pole, 0.125 wall	10 10'-0"	CLB classic bronze	LT less tenon
APQ205RDB 5" O.D. fluted pole, 0.156 wall	12 12'-0"	GRN green	GFCI-TOP ground fault circuit protected outlet, placed 6" from the top of pole
APQ206RDB 5" O.D. smooth pole, 0.125 wall	14 14'-0"	TBK textured black	
	16 16'-0"		

Ordering Information - Accessories (ordered separately)

1	2
1 Model	2 Finish
BA18-FRC4 18" banner arm, 4" OD shaft	BLK satin black
BA18-FRC5 18" banner arm, 5" OD shaft	CLB classic bronze
BA24-FRC4 24" banner arm, 4" OD shaft	GRN green
BA24-FRC5 24" banner arm, 5" OD shaft	TBK textured black
2BA18-FRC4-180 double sided 18" banner arms, 4" OD shaft	
2BA18-FRC5-180 double sided 18" banner arms, 5" OD shaft	
2BA24-FRC4-180 double sided 24" banner arms, 4" OD shaft	
2BA24-FRC5-180 double sided 24" banner arms, 5" OD shaft	
FPH-4 flag pole holder for 4" non-tapered poles	
FPH-5 flag pole holder for 5" non-tapered poles	
BC4-9 base cover for 4" shaft	
BC5-9 base cover for 5" shaft	

APQ200RDB Series


Direct Burial



PROJECT:

TYPE:

Product Details

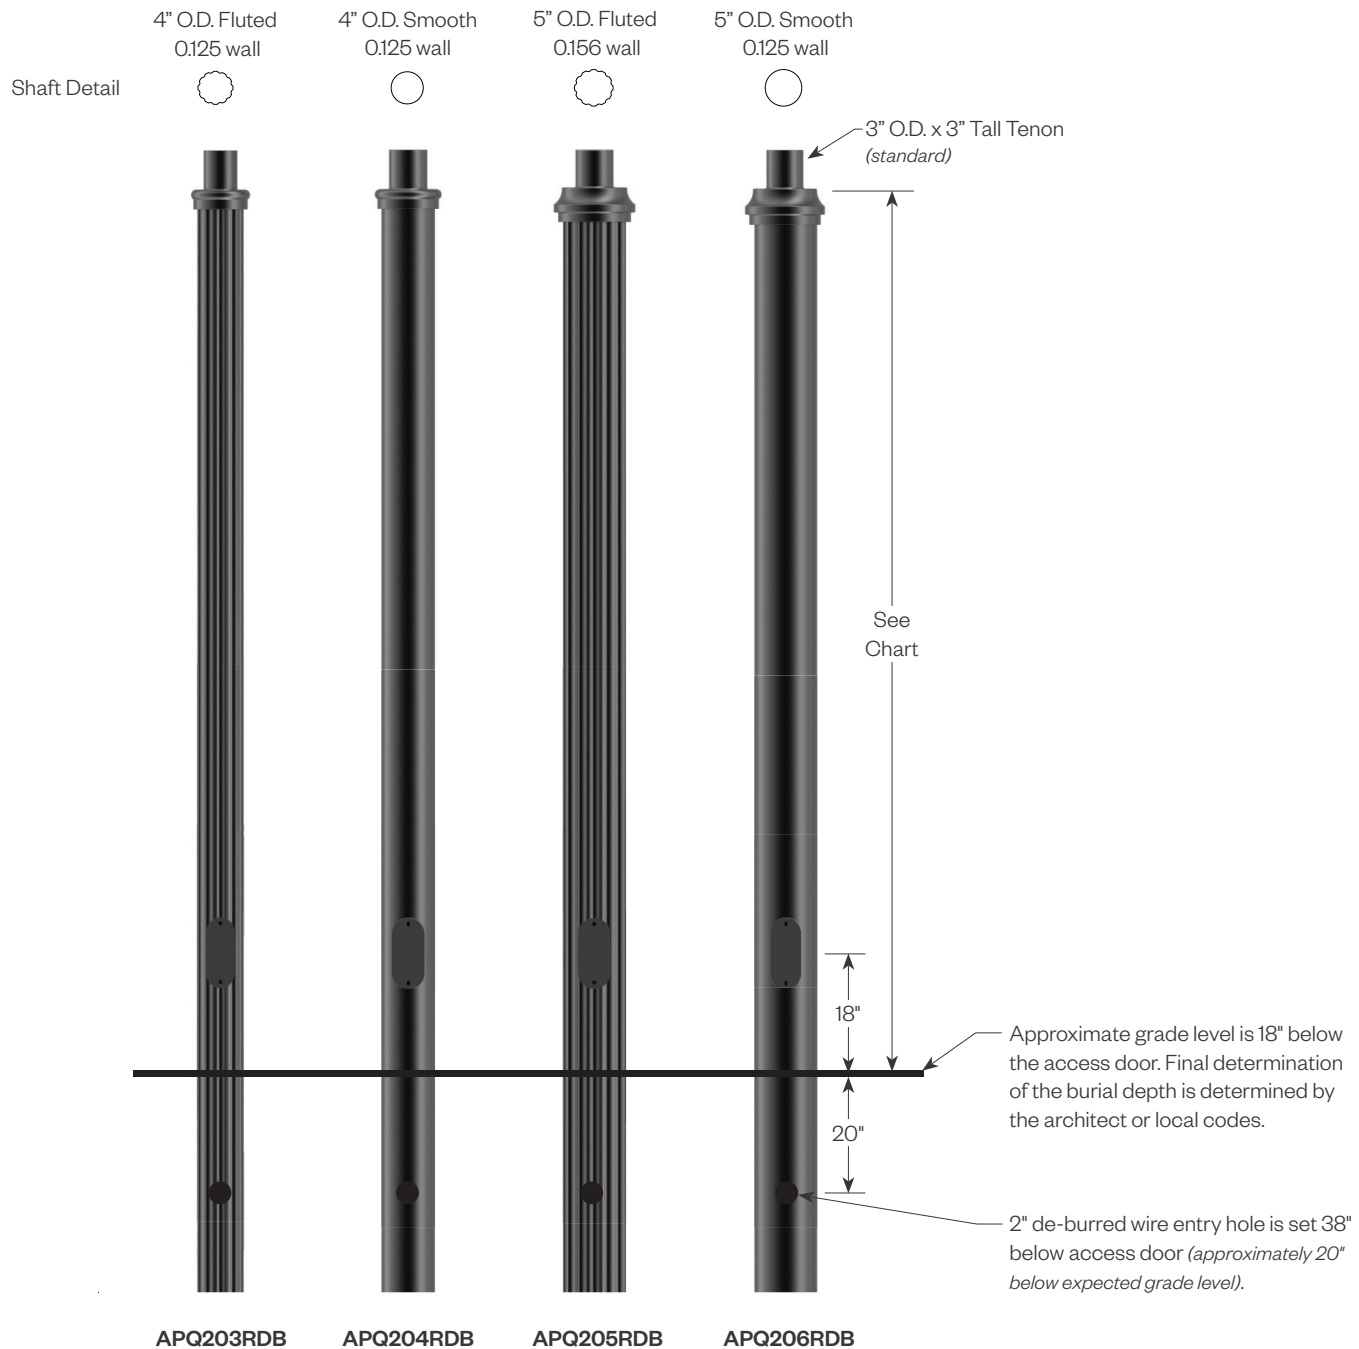

APQ203RDB-xx	APQ204RDB-xx	APQ205RDB-xx	APQ206RDB-xx	Typical Above Grade Height	Length of Direct Burial Portion
APQ203R-08	APQ204R-08	APQ205R-08	APQ206R-08	8'-0"	2'-0"
APQ203R-10	APQ204R-10	APQ205R-10	APQ206R-10	10'-0"	2'-0"
APQ203R-12	APQ204R-12	APQ205R-12	APQ206R-12	12'-0"	3'-0"
APQ203R-14	APQ204R-14	APQ205R-14	APQ206R-14	14'-0"	3'-0"
APQ203R-16	APQ204R-16	APQ205R-16	APQ206R-16	16'-0"	4'-0"

APQ200RDB Series


Direct Burial




PROJECT:

TYPE:

Direct Burial Details

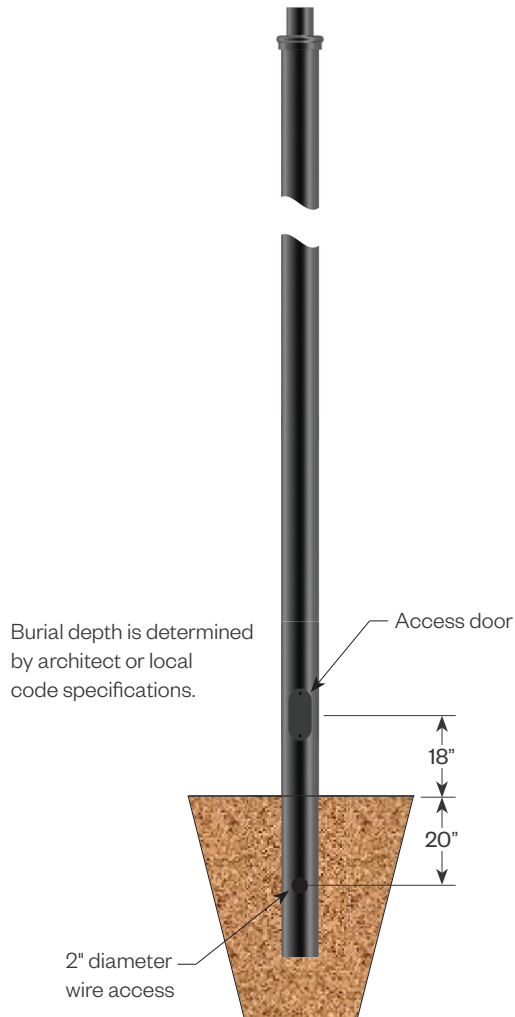


Options/Accessories



GFCI - provision for Ground Fault Circuit Interrupter outlet with NEC required wet location while in use type cover (*WUO*). The cover is made of die-cast aluminum and will be painted to match.

GFCI ORIENTATION is stated as degrees from access door and GFCI Placement on shaft must be specified in ordering guide. TOP - placement will be 6" from top of pole.



Base Covers

BC4-9 - 9" Square 2pc base cover for 4" shaft.

BC5-9 - 9" Square 2pc base cover for 5" shaft.

Banner Arms

Single or double sided field rotatable banner arms.

BA18 (18") or **BA24** (24") banner arms

FRC4 (4"OD shaft) or **FRC5** (5"OD shaft)

Add a (2) for a double arm.

Example: **2BA18-FRC4-180**

See ordering guide for configurations



FPH-4 or FPH-5

Extruded aluminum holder for 1" OD flag poles.

Available for 4" OD or 5" OD non-tapered pole.