APQ200R **Series**

Extruded Pole w/Anchor Plate





Features

Aluminum light poles featuring a choice of extruded shafts. Accepts a wide variety of Amerlux post top luminaires.

8" square cast aluminum base flange

Choice of extruded shafts:


- 4" OD fluted, 0.125 wall
- 4" OD smooth round, 0.125 wall
- 5" OD fluted, 0.125 wall
- 5" OD smooth round, 0.125 wall

Extruded shaft is circumferentially welded to the structural base

A 2x4 flat handhole with reinforced frame.

Ground lug provided inside base

PROJECT:

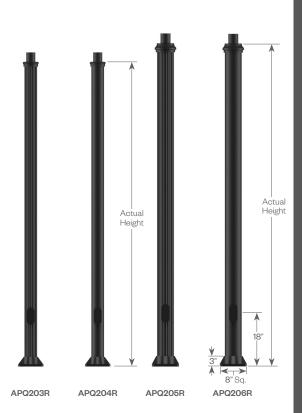

See pgs 3-4 for more details.

TYPE:

Materials:

Base - Cast aluminum (A356)

Shaft - Extruded Aluminum (A6061)

Tenon - Cast aluminum (A356)

Anchor Bolts - Hot dipped galvanized steel, ordered separately

Finish:

Premium quality thermoset polyester powdercoat for a durable finish.

Accessories:

- Single or double sided field rotatable banner arms
- Flag pole holder
- GFCI covered ground fault circuit protected duplex outlet
- Two-piece cover placed at base of pole for better aesthetics

APQ200R Series

Extruded Pole with Anchor Plate



PROJECT: TYPE:

Pole Ordering Information

1 2 3 4

Model	Pole Height 3	Finish	Options/Accessories	
APQ203R 4" O.D. fluted pole, 0.125 wall	08 8'-0"	BLK satin black	GFCI-TOP ground fault circuit protected coutlet, placed 6" from the top of pole	
APQ204R 4" O.D. smooth pole, 0.125 wall	10 10'-0"	CLB classic bronze		
APQ205R 5" O.D. fluted pole, 0.125 wall	12 12'-0"	GBZ gloss textured bronze		
APQ206R 5" O.D. smooth pole, 0.125 wall	14 14'-0"	GRN green	LT less tenon	
	16* 16'-0"	GTB gloss textured black		
		TBK textured black		
	* Available for 5" O.D. poles only	TGR gloss textured green		
		CSTM custom, consult		
		factory		

Anchor Bolt Ordering Information (ordered separately, can be pre-shipped upon request)

1

1 Model

APQ20XR-555-0004 1/2" x 18" anchor bolts

Accessory Ordering Information (ordered separately)

1 2

Model

BA18-FRC4 18" banner arm, 4" OD shaft

BA24-FRC4 24" banner arm, 4" OD shaft

2BA18-FRC4-180 double sided 18" banner arms, 4" OD shaft

2BA24-FRC4-180 double sided 24" banner arms, 4" OD shaft

FPH-4 flag pole holder for 4" non-tapered poles

FPH-5 flag pole holder for 5" non-tapered poles

BC4-9 base cover for 4" shaft

BC5-9 base cover for 5" shaft

2 Finish

BLK satin black

CLB classic bronze

GBZ gloss textured bronze

GRN green

GTB gloss textured black

TBK textured black

TGR gloss textured green

CSTM custom, consult factory

APQ200R Series

Extruded Pole with Anchor Plate

APQ203R



PROJECT:

Product Details Detail 5" O.D. Smooth 4" O.D. Fluted 4" O.D. Smooth 5" O.D. Fluted 0.125 wall 0.125 wall 0.125 wall 0.125 wall 3" O.D. x 3" Tall Tenon See Chart Below See Chart Below 18" **8**" Sq.

APQ203R-xx	APQ204R-xx	APQ205R-xx	APQ206R-xx	Actual Height
APQ203R-08	APQ204R-08	APQ205R-08	APQ206R-08	8'-0"
APQ203R-10	APQ204R-10	APQ205R-10	APQ206R-10	10'-0"
APQ203R-12	APQ204R-12	APQ205R-12	APQ206R-12	12'-0"
APQ203R-14	APQ204R-14	APQ205R-14	APQ206R-14	14'-0"
-	-	APQ205R-16	APQ206R-16	16'-0""

APQ205R

APQ204R


APQ206R

APQ200R Series

Extruded Pole with Anchor Plate



PROJECT: TYPE:

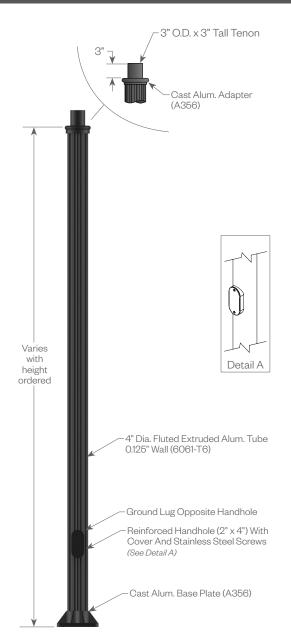

Finishes

The post will be finished with an electrostatically applied thermoset polyester powder coat. Prior to finishing, the parts are thoroughly cleaned. Our powder coat finish is durable, long lasting, attractive and scratch resistant as well as environmentally friendly. We offer 7 stock finishes or hundreds of special order colors including custom matching for existing projects (additional charges apply).

BLK - Satin Black

CLB - Classic Bronze

GBZ - Gloss Textured Bronze

GRN - Green

GTB - Gloss Textured Black

TBK - Textured Black

TGR - Gloss Textured Green

Accessories

Banner Arms

Single or double sided field rotatable banner arms.

BA18 (18") or BA24 (24") banner arms

FRC4 (4"OD shaft)

Add a (2) for a double arm. Example: **2BA18-FRC4-180**

zampie. **2BAI6-FNO4-180**

See ordering guide for configurations



FPH-4 or FPH-5

Extruded aluminum holder for 1" OD flag poles. Available for 4" OD or 5" OD non-tapered pole.



GFCI - Top

Covered ground fault circuit protected duplex outlet. Placed near top of pole. Wet while in use rated.




Base Covers

BC4-9 - 9" Square 2pc base cover for 4" shaft.

BC5-9 - 9" Square 2pc base cover for 5" shaft.

GFCI Orientation Guide


As viewed from above




Note: GFCI placed at 0° unless otherwise specified.

Note: Orientation of additional accessories must be specified when ordering.

Anchor Details



Anchor bolts and templates can be requested prior to product shipment.



(4) 1/2" Galvanized Steel L-Type Anchor Bolts

- (8) 1/2" Galvanized Steel Hex Nuts
- (8) Galvanized Steel Flat Washers