# APQ200R Series

Extruded Pole w/Anchor Plate





# **Features**

Aluminum light poles featuring a choice of extruded shafts. Accepts a wide variety of Amerlux post top luminaires.

8" square cast aluminum base flange

# Choice of extruded shafts:

- 4" OD fluted, 0.125 wall
- 4" OD smooth round, 0.125 wall
- 5" OD fluted, 0.125 wall
- 5" OD smooth round, 0.125 wall

Extruded shaft is circumferentially welded to the structural base

A 2x4 flat handhole with reinforced frame.

Ground lug provided inside base

# PROJECT:

# Actual Height Actual Height Actual Height Actual Height Actual Height Apozoar Apo

# TYPE:

# Materials:

Base - Cast aluminum (A356)

Shaft - Extruded Aluminum (A6061)

Tenon - Cast aluminum (A356)

Anchor Bolts - Hot dipped galvanized steel, ordered separately

# Finish:

Premium quality thermoset polyester powdercoat for a durable finish.

# Accessories:

- Single or double sided field rotatable banner arms
- Flag pole holder
- GFCI covered ground fault circuit protected duplex outlet
- Two-piece cover placed at base of pole for better aesthetics





See pgs 3-4 for more details.

# **APQ200R Series**

Extruded Pole with Anchor Plate



PROJECT: TYPE:

# **Pole Ordering Information**

1 2 3 4

Model	Pole Height	3 Finish	Options/Accessories	
<b>APQ203R</b> 4" O.D. fluted pole, 0.125 wall	08 8'-0"	BLK satin black	<b>GFCI-TOP</b> ground fault circuit protected coutlet, placed 6" from the top of pole	
<b>APQ204R</b> 4" O.D. smooth pole, 0.125 wall	<b>10</b> 10'-0"	CLB classic bronze		
<b>APQ205R</b> 5" O.D. fluted pole, 0.125 wall	<b>12</b> 12'-0"	GBZ gloss textured bronze		
<b>APQ206R</b> 5" O.D. smooth pole, 0.125 wall	<b>14</b> 14'-0"	GRN green	LT less tenon	
	<b>16</b> 16'-0"	GTB gloss textured black		
		TBK textured black		
		TGR gloss textured green		
		CSTM custom, consult		
		factory		

# Anchor Bolt Ordering Information (ordered separately, can be pre-shipped upon request)

1

1 Model

APQ20XR-555-0004 1/2" x 18" anchor bolts

# **Accessory Ordering Information** (ordered separately)

1 2

Model
BA18-FRC4 18" banner arm, 4" OD shaft

BA24-FRC4 24" banner arm, 4" OD shaft

2BA18-FRC4-180 double sided 18" banner arms, 4" OD shaft

2BA24-FRC4-180 double sided 24" banner arms, 4" OD shaft

FPH-4 flag pole holder for 4" non-tapered poles

FPH-5 flag pole holder for 5" non-tapered poles

BC4-9 base cover for 4" shaft

BC5-9 base cover for 5" shaft

2 Finish

**BLK** satin black

**CLB** classic bronze

GBZ gloss textured bronze

**GRN** green

GTB gloss textured black

TBK textured black

TGR gloss textured green

**CSTM** custom, consult factory

# **APQ200R Series**

Extruded Pole with Anchor Plate

APQ203R



PROJECT: TYPE:

# **Product Details** Detail 5" O.D. Smooth 4" O.D. Fluted 4" O.D. Smooth 5" O.D. Fluted 0.125 wall 0.125 wall 0.125 wall 0.125 wall 3" O.D. x 3" Tall Tenon See Chart Below See Chart Below 18" 8" Sq.

APQ203R-xx	APQ204R-xx	APQ205R-xx	APQ206R-xx	Actual Height
APQ203R-08	APQ204R-08	APQ205R-08	APQ206R-08	8'-0"
APQ203R-10	APQ204R-10	APQ205R-10	APQ206R-10	10'-0"
APQ203R-12	APQ204R-12	APQ205R-12	APQ206R-12	12'-0"
APQ203R-14	APQ204R-14	APQ205R-14	APQ206R-14	14'-0"
APQ203R-16	APQ204R-16	APQ205R-16	APQ206R-16	16'-0""

APQ205R

APQ206R


APQ204R

# **APQ200R Series**

Extruded Pole with Anchor Plate



# PROJECT: TYPE:

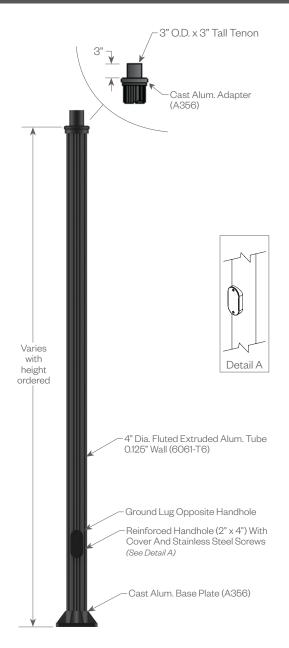

# **Finishes**

The post will be finished with an electrostatically applied thermoset polyester powder coat. Prior to finishing, the parts are thoroughly cleaned. Our powder coat finish is durable, long lasting, attractive and scratch resistant as well as environmentally friendly. We offer 7 stock finishes or hundreds of special order colors including custom matching for existing projects (additional charges apply).

**BLK** - Satin Black

**CLB** - Classic Bronze

**GBZ** - Gloss Textured Bronze

**GRN** - Green

GTB - Gloss Textured Black

**TBK** - Textured Black

TGR - Gloss Textured Green

# Accessories

### **Banner Arms**

Single or double sided field rotatable banner arms.

BA18 (18") or BA24 (24") banner arms

----

FRC4 (4"OD shaft)

Add a (2) for a double arm.

Example: 2BA18-FRC4-180

See ordering guide for configurations



# FPH-4 or FPH-5

Extruded aluminum holder for 1" OD flag poles. Available for 4" OD or 5" OD non-tapered pole.



### GFCI - Top

Covered ground fault circuit protected duplex outlet. Placed near top of pole. Wet while in use rated.




### **Base Covers**

BC4-9 - 9" Square 2pc base cover for 4" shaft.

BC5-9 - 9" Square 2pc base cover for 5" shaft.

# **GFCI Orientation Guide**


As viewed from above




Note: GFCI placed at 0° unless otherwise specified.

Note: Orientation of additional accessories must be specified when ordering.

# **Anchor Details**



Anchor bolts and templates can be requested prior to product shipment.



(4) 1/2" Galvanized Steel L-Type Anchor Bolts

- (8) 1/2" Galvanized Steel Hex Nuts
- (8) Galvanized Steel Flat Washers