

APQ510 Series



PROJECT:

TYPE:

Features

The APQ Family includes a broad selection of decorative aluminum poles with a typical lead time of just (6) weeks. The APQ poles are the right choice for projects that require a quick fulfillment to the site and don't need customization of the poles.

Product Overview

Type: Exterior Lighting Pole for Amerlux Post Top Luminaires
Pole Height: 8', 10', 12', 14'
Shaft Size: 4" OD



APQ51x

Certifications



Fixture Summary

Construction:

- Strong, lightweight and easy to install
- Extruded aluminum shaft welded to a decorative cast aluminum base
- 3" O.D. x 3" tall tenon included for luminaire mounting
- Access door for wiring secured with stainless steel screws
- Ground lug included inside base

Materials:

- Base - Cast aluminum (A356)
- Shaft - Extruded aluminum (6061-T6)
- Tenon - Cast aluminum (A356)
- Anchor Bolts - Hot dipped galvanized steel
- Hardware - Stainless steel

Finish:

The post will be finished with an electrostatically applied polyester powder coat suitable for exterior use. The poles are pretreated using industry standard environmentally responsible processes for a long lasting and durable finish.

Anchorage:

- 1/2" x 18" x 3" hot-dipped galvanized steel L-type anchor bolts
(ordered separately)

APQ510 Series



PROJECT:

TYPE:

Ordering Information - Pole

1	2	3	4
1 Model	2 Pole Height	3 Finish	4 Options
APQ513 4" O.D. fluted pole, 0.125 wall	08 7'-8"	BLK satin black	(3" OD x 3" tall tenon is standard)
APQ514 4" O.D. smooth pole, 0.125 wall	10 9'-8"	CLB classic bronze	LT less tenon
	12 11'-8"	GRN green	GFCI-TOP ground fault circuit protected outlet, placed 6" from the top of pole
	14 13'-8"	TBK textured black	GFCI-BTM ground fault circuit protected outlet, placed 6" above the base at the bottom of pole

Ordering Information - Anchor Bolt (ordered separately, can be pre-shipped upon request)

APQ510-555-0004

1
1 Model
APQ510-555-0004 1/2" x 18" anchor bolts (4 included)

Ordering Information - Accessories (ordered separately)

1	2
1 Model	2 Finish
BA18-FRC4 18" banner arm, 4" OD shaft	BLK satin black
BA24-FRC4 24" banner arm, 4" OD shaft	CLB classic bronze
2BA18-FRC4-180 double sided 18" banner arms, 4" OD shaft	GRN green
2BA24-FRC4-180 double sided 24" banner arms, 4" OD shaft	TBK textured black
FPH-4 flag pole holder for 4" non-tapered poles	

PROJECT:

TYPE:

Product Details




APQ513-xx	APQ514-xx	Actual Height
APQ513-08	APQ514-08	7'-8"
APQ513-10	APQ514-10	9'-8"
APQ513-12	APQ514-12	11'-8"
APQ513-14	APQ514-14	13'-8"


PROJECT:

TYPE:

Bolt Circle Detail

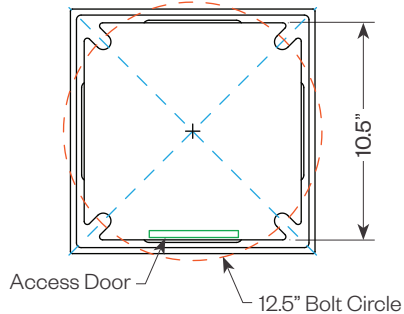

Anchor Detail



- (4) 1/2" Galvanized Steel L-Type Anchor Bolts
- (8) 1/2" Galvanized Steel Hex Nuts
- (8) Galvanized Steel Flat Washers

Anchor bolts and wiring are accessed by removing the base doors




Option - GFCI



GFCI - provision for Ground Fault Circuit Interrupter outlet with NEO required wet location while in use type cover (*WUOC*). The cover is made of die-cast aluminum and will be painted to match.

GFCI ORIENTATION is stated as degrees from access door and GFCI Placement on shaft must be specified in ordering guide.

TOP - placement will be 6" from top of pole.
BTM - placement will be 6" above the base.



Accessories

Banner Arms

Single or double sided field rotatable banner arms.

BA18 (18") or **BA24** (24") banner arms

FRC4 (4"OD shaft)

Add a (2) for a double arm.

Example: **2BA18-FRC4-180**

See ordering guide for configurations



FPH-4

Extruded aluminum holder for 1" OD flag poles.

Available for 4" OD non-tapered pole.

