

D730 Series

LED Luminaire



Features


Lighting for exterior retail, commercial and hospitality environments. The D730 Series consists of an efficient Type III (T3) or Type V (T5) refractive lens combined with one of several styles of cast aluminum fitters. The spun aluminum hood minimizes light in the upper hemisphere. Powered by the Amerlux patented AVISTA® LED system with options for intensity, distribution and color. An optional Smartsite wireless lighting controller is available.

Product Overview

Wattage:	up to 86W
Lumen Engine Output :	up to 10,943 lm; up to 143 lm/W
Color Temp:	2700K, 3000K, 4000K
Dimming:	0-10V dimming Manual onboard dimming option available

PROJECT:

TYPE:

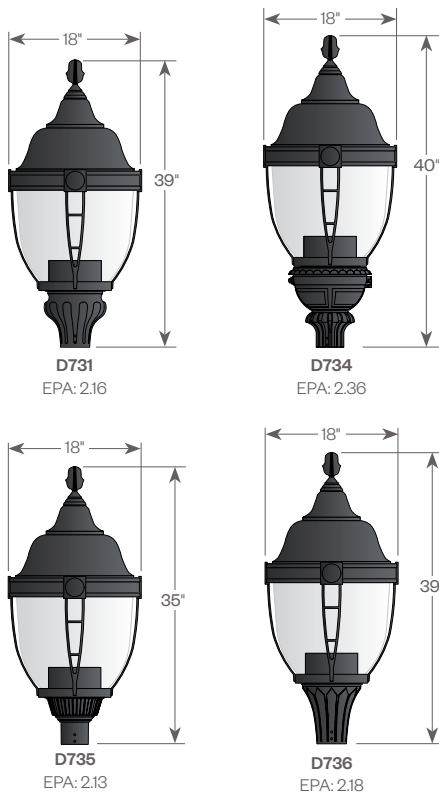

Installation:

The luminaire will mount to a 3" OD post or tenon with 5/16" black oxide coated stainless steel set screws to ensure a solid connection. The diffuser will be held to the fitter by (4) 5/16"-18 black oxide coated stainless steel set screws.

Electrical:

- Over voltage and short circuit protected driver
- Series connected 10kV/20kA surge protector
- Automatic AC incoming voltage sensing (120V-277V)
- 347V-480V option consult factory
- 0-10V dimming

Diffuser Choices:

- Acrylic Type III (**AC-T3**)
- Acrylic Type V (**AC-T5**)
- Polycarbonate Type III (**PC-T3**)
- Polycarbonate Type V (**PC-T5**)

Distribution:

- Symmetric (**SY**)

CCT:

- 2,700K (**27**)
- 3,000K (**30**)
- 4,000K (**40**)

Power Level:

(see performance chart for output)

- **P1** (30W)
- **P2** (44W)
- **P3** (60W)
- **P4** (86W)

L70:

72,000+ hrs.

Finish:

Durable thermoset polyester powdercoat finish in the following:

- Satin Black (**BLK**)
- Classic Bronze (**CLB**)
- Gloss Textured Bronze (**GBZ**)
- Green (**GRN**)
- Gloss Textured Black (**GTB**)
- Textured Black (**TBK**)
- Gloss Textured Green (**TGR**)
- Wireless control option

Accessories:

- Dusk-to-dawn Photocell (**PCL**)
- Controls Capable Harness (**CCH**)

ETL listed, suitable for wet locations.



5 year limited warranty
AMERLUX LED



D730 Series

LED Luminaire



PROJECT:

TYPE:

Ordering Information



1	2	3	4
Model	Diffuser Material - Color	LED System	CCT
D731	AC-T3 acrylic Type III	AVI-G3-SY Avista light engine, with symmetrical distribution	27 2700K
D734	AC-T5 acrylic Type V		30 3000K
D735	PC-T3 polycarbonate Type III		40 4000K
D736	PC-T5 polycarbonate Type V		
5	6	7	
Power Level	Finish	Accessories	
P1 (30W)	BLK satin black	PCL dusk-to-dawn button type photocell (not available for use with CCH)	
P2 (44W)	CLB classic bronze	CCH controls capable harness (not available for use with PCL)	
P3 (60W)	GBZ gloss textured bronze	Consult factory for SmartSite integrated wireless control option (SSINT-1)	
P4 (86W)	GRN green		
<i>120V-277V auto-sensing driver is standard. Consult factory for 347V/480V option.</i>	GTB gloss textured black		
	TBK textured black		
	TGR gloss textured green		
	CSTM custom		

Please Note: Fixture is available with optional Medium base (MDO) or Mogul base (MGO) socket only. Consult factory for details.

D730 Series

LED Luminaire



PROJECT:

TYPE:

Engine Only Performance

ALL IES files supplied are 3000K.


For 2700K use a 0.905 multiplier; For 4000K use a 1.05 multiplier.




Model	CCT	Power Level	System Watts	LED Engine Lumens	LED Engine LPW
AVI-G3-SY	27	P1	30	3651	122.9
	30			4034	135.8
	40			4246	143.0
	27	P2	44	5245	119.2
	30			5794	131.7
	40			6099	138.6
	27	P3	60	7026	116.1
	30			7762	128.3
	40			8170	135.0
	27	P4	86	9411	109.4
	30			10394	120.9
	40			10943	127.2

Approximate lumens delivered from raw light engine.

Typical Light Distribution



T3 Diffuser



T5 Diffuser