

D730AO Series

LED Luminaire



Features


Lighting for exterior retail, commercial and hospitality environments. The D730AO Series consists of an efficient Type III (T3) or Type V (T5) refractive lens combined with one of several styles of cast aluminum fitters and a decorative cage. Powered by the Amerlux patented AVISTA® LED system with options for intensity, distribution and color. Optional controls available.

Product Overview

Wattage:	up to 86W
Lumen Engine Output :	up to 10,943 lm; up to 143 lm/W
Color Temp:	2700K, 3000K, 4000K
Dimming:	0-10V dimming Manual onboard dimming option available

PROJECT:

TYPE:

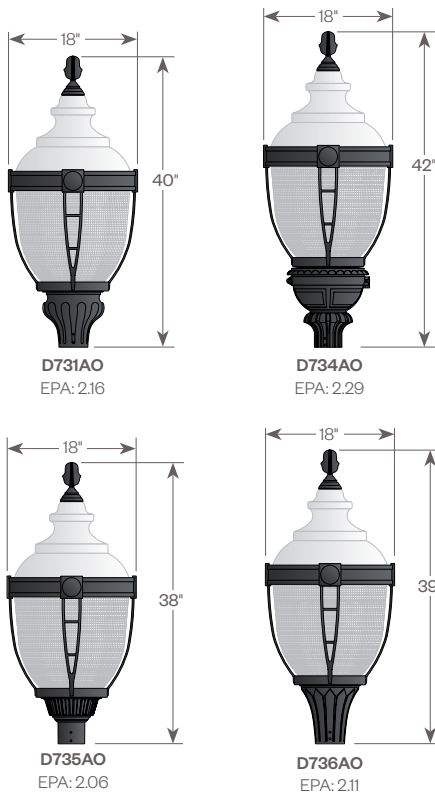

Installation:

The luminaire will mount to a 3" OD post or tenon with 5/16" black oxide coated stainless steel set screws to ensure a solid connection. The diffuser will be held to the fitter by (4) 5/16"-18 black oxide coated stainless steel set screws.

Electrical:

- Over voltage and short circuit protected driver
- Series connected 10kV/20kA surge protector
- Automatic AC incoming voltage sensing (120V-277V)
- 347V-480V option consult factory
- 0-10V dimming

Diffuser Choices:

- Acrylic Type III (**AC-T3**)
- Acrylic Type V (**AC-T5**)
- Polycarbonate Type III (**PC-T3**)
- Polycarbonate Type V (**PC-T5**)

CCT:

- 2,700K (**27**)
- 3,000K (**30**)
- 4,000K (**40**)

Power Level:

(see performance chart for output)

- **P1** (30W)
- **P2** (44W)
- **P3** (60W)
- **P4** (86W)

L70:

72,000+ hrs.

Finish:

Durable thermoset polyester powdercoat finish in the following:

- Satin Black (**BLK**)
- Classic Bronze (**CLB**)
- Gloss Textured Bronze (**GBZ**)
- Green (**GRN**)
- Gloss Textured Black (**GTB**)
- Textured Black (**TBK**)
- Gloss Textured Green (**TGR**)

Accessories:

- Dusk-to-dawn Photocell (**PCL**)
- Controls Capable Harness (**CCH**)
- Wireless control options

ETL listed, suitable for wet locations.



5 year limited warranty
AMERLUX LED



D730AO Series

LED Luminaire



PROJECT:

TYPE:

Ordering Information

1	2	3	4	5	6	7
1 Model	2 Diffuser Material - Color	3 LED System	4 CCT	5 Power Level	6 Finish	7 Accessories
D731AO D734AO D735AO D736AO	AC-T3 acrylic Type III AC-T5 acrylic Type V PC-T3 polycarbonate Type III PC-T5 polycarbonate Type V	AVI-G3-SY Avista light engine, with symmetrical distribution	27 2700K 30 3000K 40 4000K	P1 (30W) P2 (44W) P3 (60W) P4 (86W) <i>120V-277V auto-sensing driver is standard. Consult factory for 347V/480V option.</i>	BLK satin black CLB classic bronze GBZ gloss textured bronze GRN green GTB gloss textured black TBK textured black TGR gloss textured green CSTM custom	PCL dusk-to-dawn button type photocell (not available for use with CCH) CCH controls capable harness (not available for use with PCL) 7IR light engine integrated 7-pin NEMA receptacle (to allow installation of a wireless control node for operation on the SmartSite or other control platform) <i>Consult factory for SmartSite integrated wireless control option (SSINT-1)</i>

Please Note: Fixture is available with optional Medium base (MDO) or Mogul base (MGO) socket only. Consult factory for details.

D730AO Series

LED Luminaire



PROJECT:

TYPE:

Engine Only Performance


ALL IES files supplied are 3000K.
For 2700K use a 0.905 multiplier; For 4000K use a 1.05 multiplier.




Model	CCT	Power Level	System Watts	LED Engine Lumens	LED Engine LPW
AVI-G3-SY	27	P1	30	3651	122.9
	30			4034	135.8
	40			4246	143.0
	27	P2	44	5245	119.2
	30			5794	131.7
	40			6099	138.6
	27	P3	60	7026	116.1
	30			7762	128.3
	40			8170	135.0
	27	P4	86	9411	109.4
	30			10394	120.9
	40			10943	127.2

Approximate lumens delivered from raw light engine.

Typical Light Distribution



T3 Diffuser



T5 Diffuser