

DC214FC

LED Luminaire



PROJECT:

TYPE:

Features

Contemporary Post-Top lighting for exterior retail, commercial and hospitality environments. High performance LED package available in Type II, III, IV or V light distribution patterns.

Product Overview

Wattage: 42W, 56W
Color Temp: 3000K, 4000K
Dimming: 0-10V dimming
EPA: 0.77



DC214FC

Certifications



Certain Restrictions Apply for DarkSky International

Fixture Summary

Construction:

- Die-cast aluminum base
- Spun aluminum shade

Optics:

- High performance sealed modules with (12) LEDs under each lens
- 3000K or 4000K
- Available in Type II, III, IV or V light patterns

Electrical:

- Fully potted driver with electronic constant current operation
- Over voltage and short circuit protection
- Automatic voltage sensing for 120V to 277V input
- 0-10V dimmable

Ambient Operating Range:

- -40°C to 40°C

Finish:

Durable thermoset polyester powdercoat finish in the following:

- Satin Black
- Classic Bronze
- Gloss Textured Bronze
- Green
- Gloss Textured Black
- Textured Black
- Gloss Textured Green

Mounting:

- Slip fits 4" OD x 2.75" tall tenon
- Optional 3" OD x 2.75" tall tenon mount available

ETL listed, suitable for wet locations.

DC214FC

LED Luminaire





PROJECT:

TYPE:

Ordering Information

1	2	3	4	5	6	7	8
1	Model	2	Color Temp	3	Light Distribution	4	Power Level
	DC214FC		30* 3000K		T2 Type II		530M
	DC214FC-3 (use for 3" OD tenon mount)		40 4000K		T3 Type III		700M
			* To meet DarkSky International Fixture Seal of Approval 3000K CCT must be chosen. Not approved with 4000K option.		T4 Type IV		
					T5 Type V		
7	Finish	8	Accessories				
	BLK satin black		BLS backlight shield (for Type II & Type III distributions)				
	CLB classic bronze		SSINT integrated wireless control node (for operation on the SmartSite control platform)				
	GBZ gloss textured bronze		BRC bird resistant cone				
	GRN green		7P 7-pin twistlock receptacle				
	GTB gloss textured black						
	TBK textured black						
	TGR gloss textured green						
	CSTM custom						

Product Details

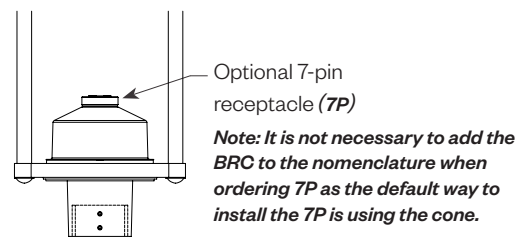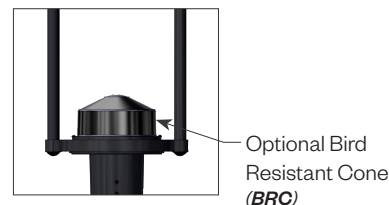

PROJECT:

TYPE:

Performance Data

Power Level	System Watts	Light Distribution	CCT	Lumens*	BUG Rating
530M	42W	T2	3000K	4548	1-0-1
			4000K	4788	1-0-1
		T3	3000K	4442	1-0-1
			4000K	4676	1-0-1
		T4	3000K	4510	1-0-1
			4000K	4747	1-0-2
		T5	3000K	4723	2-0-1
			4000K	4972	2-0-1
700M	56W	T2	3000K	6003	1-0-1
			4000K	6320	2-0-2
		T3	3000K	5863	2-0-2
			4000K	6172	2-0-2
		T4	3000K	5953	1-0-2
			4000K	6266	1-0-2
		T5	3000K	6234	3-0-1
			4000K	6563	3-0-1

* 700M Luminaire lumens are scaled from 530M data.


Lumen Maintenance

For 530mA Drive Current

Ambient Temp	50,000 Hours*	70,000 Hours*	90,000 Hours*	100,000 Hours*	Theoretical L70 Hours
25°C	>95.4%	>93.9%	>92.4%	>91.6%	>200,000


* Per IESNA TM-21 data.

Lumen maintenance values apply to all output levels and distributions.

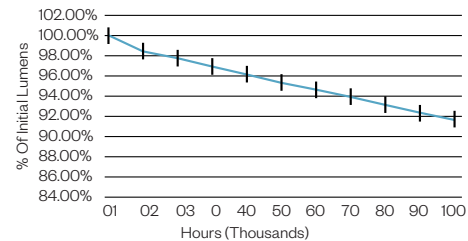


Light Distribution Types

Type II (T2)




Located At Horizontal Angle = 280; Vertical Angle = 62.5
 #1 - Vertical Plane Through Horizontal Angles (280-100)*
 #2 - Horizontal Cone Through Vertical Angle (62.5)*
 * Through Max. Cd.

Type III (T3)




Located At Horizontal Angle = 70; Vertical Angle = 70
 #1 - Vertical Plane Through Horizontal Angles (70-250)*
 #2 - Horizontal Cone Through Vertical Angle (70)*
 * Through Max. Cd.

Type IV (T4)



Located At Horizontal Angle = 40; Vertical Angle = 70
 #1 - Vertical Plane Through Horizontal Angles (40-220)*
 #2 - Horizontal Cone Through Vertical Angle (70)*
 * Through Max. Cd.

Type V (T5)



Located At Horizontal Angle = 220; Vertical Angle = 62.5
 #1 - Vertical Plane Through Horizontal Angles (220-40)*
 #2 - Horizontal Cone Through Vertical Angle (62.5)*
 * Through Max. Cd.