

DC214

LED Luminaire



Features


Post-top lighting for exterior retail, commercial and hospitality environments featuring high performance optical lenses, a choice of 3 different light patterns, and various color temperatures.

Product Overview

Wattage:	58W, 82W
Lumen Output :	6,000 lm (82W, 5000K)
Color Temp:	3000K, 4000K, 5000K
Dimming:	0-10V dimming

PROJECT:

TYPE:

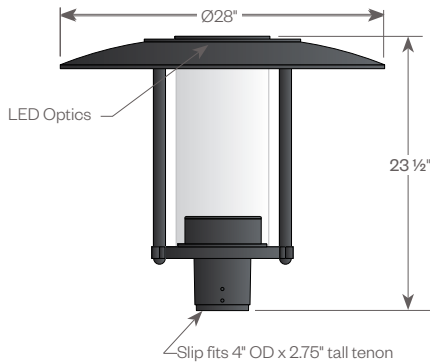

Construction:

- Die-Cast aluminum base
- Spun aluminum shade
- Clear smooth acrylic lens

Electrical:

Fully potted driver with electronic constant current operation with over voltage and short circuit protection. Automatic voltage sensing for 120V to 277V input. 0-10V dimmable.

Optics:

- 4 High Performance optical lenses (one for each LED)
- Cool, neutral, or warm color temperatures
- Available in Type II, III or V light patterns

Ambient Operating Range:

-40°C to 40°C

Mounting:

Slip fits 4" OD x 2.75" tall tenon
Optional 3" OD x 2.75" tall tenon mount available (consult factory)

Finish:

Durable thermoset polyester powdercoat finish in the following:

- Satin Black (**BLK**)
- Classic Bronze (**CLB**)
- Gloss Textured Bronze (**GBZ**)
- Green (**GRN**)
- Gloss Textured Black (**GTB**)
- Textured Black (**TBK**)
- Gloss Textured Green (**TGR**)

EPA:

1.26

ETL listed, suitable for wet locations.



5 year limited warranty
AMERLUX LED

POWDER COATED TOUGH



Electrostatic sensitive device, observe precautions for handling

DC214

LED Luminaire



PROJECT:

TYPE:

Ordering Information

DC214

1

2

3

4

5

1

Model
DC214

2

Diffuser Choicest
T2 - Type 2
T3 - Type 3
T5 - Type 5

3

Performance Code
3VL - 3,000K, 58W
4VL - 4,000K, 58W
5VL - 5,000K, 58W
3L - 3,000K, 82W
4L - 4,000K, 82W
5L - 5,000K, 82W

4

Finish
BLK - Satin Black
CLB - Classic Bronze
GBZ - Gloss Textured Bronze
GRN - Green
GTB - Gloss Textured Black
TBK - Textured Black
TGR - Gloss Textured Green
CSTM - Custom

5

Dimming Option
DM - 0-10V dimming

Performance Chart

Performance Code	CCT	CRI	Approx. Lumens Delivered	Nominal Input Power
3VL	3,000K	82	4,300	58W
4VL	4,000K	80	4,500	
5VL	5,000K	65	4,800	
3L	3,000K	82	5,700	82W
4L	4,000K	80	5,800	
5L	5,000K	65	6,000	