

DC214

LED Luminaire



PROJECT:

TYPE:

Features

Post-top lighting for exterior retail, commercial and hospitality environments featuring high performance optical lenses, a choice of 3 different light patterns, and various color temperatures.

Product Overview

Wattage: 58W, 82W
Lumen Output: 6,000 lm (82W, 5000K)
Color Temp: 3000K, 4000K, 5000K
Dimming: 0-10V dimming



Certifications



Fixture Summary

Construction:

- Die-cast aluminum base
- Spun aluminum shade
- Clear smooth acrylic lens

Electrical:

Fully potted driver with electronic constant current operation with over voltage and short circuit protection. Automatic voltage sensing for 120V to 277V input, 0-10V dimmable.

Optics:

- 4 high performance optical lenses (1 for each LED)
- Cool, neutral, or warm color temperatures
- Available in Type II, III or V light patterns

Ambient Operating Range:

-40°C to 40°C

Mounting:

Slip fits 4" OD x 2.75" tall tenon.

Optional 3" OD x 2.75" tall tenon mount available (consult factory).

Finish:

Durable thermoset polyester powdercoat finish in the following:

- Satin Black
- Classic Bronze
- Gloss Textured Bronze
- Green
- Gloss Textured Black
- Textured Black
- Gloss Textured Green

EPA:

1.26

ETL listed, suitable for wet locations.



PROJECT:

TYPE:

Ordering Information

DC214

1

2


3

4

5

1	Model	2	Light Distribution Type	3	Performance Code	4	Finish	5	Dimming Option
	DC214		T2 Type II		3VL 3000K, 58W		BLK satin black		DM 0-10V dimming
	DC214-3 (use for 3" OD tenon mount)		T3 Type III		4VL 4000K, 58W		CLB classic bronze		
			T5 Type V		5VL 5000K, 58W		GBZ gloss textured bronze		
					3L 3000K, 82W		GRN green		
					4L 4000K, 82W		GTB gloss textured black		
					5L 5000K, 82W		TBK textured black		
							TGR gloss textured green		
							CSTM custom		

Product Details

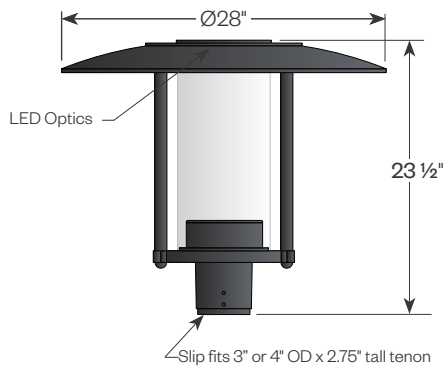

Performance Chart

Performance Code	CCT	CRI	Approx. Lumens Delivered	Nominal Input Power
3VL	3000K	82	4300	58W
4VL	4000K	80	4500	
5VL	5000K	65	4800	
3L	3000K	82	5700	82W
4L	4000K	80	5800	
5L	5000K	65	6000	