

# Passo CR

4" Louvered LED

Recessed Wall Luminaire



PCOL4



## Features

The Passo family of luminaires includes high quality, architecturally relevant fixtures suitable for use in both outdoor or indoor applications. All members of the Passo family feature an independently sealed optical chamber and fully potted driver. These features are especially beneficial in exterior applications as they help compensate for the challenges in getting a good seal between a pre-installed back box and the faceplate as well as those challenges in fully sealing the conduit system. Each luminaire is available in a choice of three output levels to help tailor the desired illuminance to the project and a standard 0-10V dimmable driver allows even further flexibility. Available in amber for Wildlife Lighting Certified applications.

## Product Overview

Type:	Recessed Wall Luminaire
Wattage:	up to 5.4W
Lumen Output :	up to 26 lm
Color Temp:	2700K, 3000K, 4000K, Amber
Dimming:	0-10V down to 10%

## PROJECT:



## TYPE:

### Application:

Designed for new construction in interior or exterior hollow walls or poured concrete.

### Construction:

- Die-cast aluminum housing with protective powdercoat finish
- Sealed die-cast aluminum internal optical chamber
- Die-cast aluminum faceplate
- 1/8" tempered frosted glass lens

### Driver:

- Drive Current (100, 175 or 350mA)
- 2.5kv surge protection
- Fully potted
- Input voltage 120V-277V auto-sensing
- 0-10V dimmable down to 10%

**ETL listed, suitable for wet locations.**

### Optics:

Individually sealed optical chamber insures LEDs are secure independent of the installation of the back box.

### Finish:

Premium quality thermoset polyester powdercoat faceplate for a durable finish. Wildlife Lighting finishes available (for use with Amber option only).



# Passo CR

4" Louvered LED Recessed Wall Luminaire



## PROJECT:

## TYPE:

### Luminaire Ordering Information

PCCL4

1

2

3

1

Model  
PCCL4

2

Performance Code  
L27 - 2700K / 100mA  
L30 - 3000K / 100mA  
L40 - 4000K / 100mA  
H27 - 2700K / 175mA  
H30 - 3000K / 175mA  
H40 - 4000K / 175mA  
VH27 - 2700K / 350mA  
VH30 - 3000K / 350mA  
VH40 - 4000K / 350mA  
AL - Amber, Low  
AH - Amber, High

3

Finish  
ANT\* - Anthracite Gray  
BLK\* - Satin Black  
CLB\* - Classic Bronze  
SLV - Silver  
WHT - White  
CSTM - Custom



\* FWC Approved Finishes  
For Amber Light Source

### Back Box Ordering Information (Back Box must be ordered for a complete unit, ordered separately)

CRBX-4

1

1

Model  
CRBX-4

Note: Back Box can be shipped ahead of the steplight, upon request.

# Passo CR


4" Louvered LED Recessed Wall Luminaire




## PROJECT:

## TYPE:

### Construction Detail

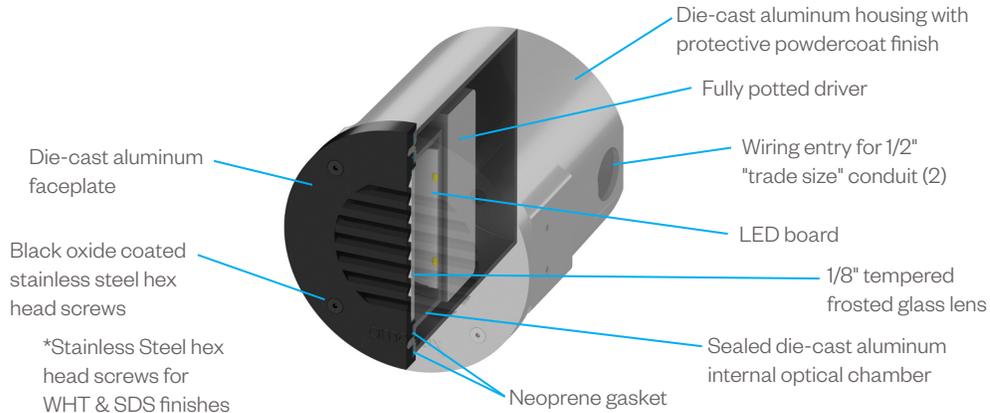


### Application Brackets (included with order)



Horizontal Brackets  
(Hollow Wall)

### Performance Detail

PCCL4 Polar Graph



Performance Code	CCT/CRI	Approx. Lumens	Drive Current	Nominal Input Power
L27	2700K/80	10	100mA	1.5W
L30	3000K/80	11		
L40	4000K/70	12		
H27	2700K/80	13	175mA	2.7W
H30	3000K/80	14		
H40	4000K/70	15		
VH27	2700K/80	23	350mA	5.4W
VH30	3000K/80	24		
VH40	4000K/70	26		

#### Amber Option

Model Code	Output
PCCL4-AL	33 mW
PCCL4-AH	50 mW



Note: IES files available on our website.  
For VHxx data - use Hxx ies files with a 1.77 multiplier.