

Hornet® HP

Round Downlights



PROJECT:


TYPE:

Features


Small in size but big on performance. The Hornet® downlights deliver the output of the 20W ceramic metal halide, but with the control and crisp color of the MR16 halogen. 3.5" round trim available as a fixed downlight, adjustable, pinhole adjustable or pinhole adjustable slot aperture. Remodeler, Trimless and Millwork options available.

Product Overview

Type: Recessed Round Downlight
Wattage: 13W, 18W, 20W
Color Temp: 2200K, 2700K, 3000K, 3500K, 4000K
CRI: 83 typ. (2700K, 3000K, 3500K, 4000K)
90+ typ. (2200K, 2700K, 3000K, 3500K, 4000K)
CrispWhite (18W max) & 3K Class A available
Dimming: TRIAC & ELV, 5% Dim, 120/277VAC
Lutron LDE1 Hi-lume® 1% Soft-On/Fade-to-Black, 120/277VAC
0-10V, 1% Dim, 120/277VAC
DALI, 1% Dim, 120/277VAC



HDL-HP-RA




HDL-HP-RA-TL
(trimless)




HDL-HP-RD



HDL-HP-RD-MWK
(millwork)



HDL-HP-RPA
(shower)



HDL-HP-RPAS

Certifications



5 year limited warranty
AMERLUX LED



Fixture Summary

Fixture Type

Round/Square	New Construction	Remodeler	Trim	Trimless	Millwork
Yes	Yes	Yes	Yes	Yes	Yes

See separate spec sheet for Square trims

Performance Data

Watts	Delivered Lumens	LPW	CBCP	Color Temp-CRI
13	860	66	8,130	3000K-83
18	1,191	66	11,257	3000K-83
20	1,323	66	12,508	3000K-83

Data is based on 3000K-83 120V IES files available on website.

Data is based on Spot optics, See pg 8-11 for other performance data.

All wattages and LPW's include 2W for thermal protector.

Electrical Data

	13W		18W		20W	
Voltage	System Watts	Amps	System Watts	Amps	System Watts	Amps
120V	13	0.11	18	0.15	20	0.17
277V	13	0.05	18	0.06	20	0.07

Electronic constant current LED driver.

Hornet® HP

Round Downlights



PROJECT:

TYPE:

Ordering Information - Housing/Frame

1	2	3	4	5	6
1	Model	2	Style	3	Wattage
	<u>For New Construction</u> HDL-HP-R-NC-A17 (New Construction) HDL-HP-R-CP-A17 (Chicago Plenum (OCEA) housing) HDL-HP-R-IC-A17 ^{T24} (Insulated Ceiling/air tight, 13W & 18W only) <u>For Existing Ceilings</u> HDL-HP-R-REM-A17 (Remodeler)	T trimmed TL trimless MWK^R millwork (for 1/2" - 11/16" ceiling thickness) MWK1^R millwork (for 3/4" - 1-1/2" ceiling thickness) MWK2^R millwork (for 1-1/2" - 2" ceiling thickness) <i>^RNot available for use with Remodeler model</i>	13 ^{T24} 18 ^{T24} 20 (not available for use with IC housing)		
4	Voltage	5	Driver (for non-dimming, select LE/TE option)	6	Options/Accessories
	120 277 120/277 (for use with IC housing only)	LE/TE ^{T24} TRIAC/ELV dimming HILUME-H-ECO - Lutron LDE1 Hi-lume® 1% dim Soft-On/Fade-to-Black 0-10V ^{T24} 0-10V dimming, 1% dim DALI DALI dimming, 1% dim	EM - emergency battery pack with remote test switch (not available for use with REM, CP or IC options) HB49 - hanger bars from min 29" to max 49" (not available for use with REM options) Note: 26" hanger bars are included as standard. Choose HB49 option above for larger mounting spaces only.		

Ordering Information - Trim

1	2	3	4	5	6
1	Model	2	Style	3	Finish
	HDL-HP-RD-A17 (downlight) HDL-HP-RA-A17 (adjustable) HDL-HP-RPA-A17 (pinhole adjustable) HDL-HP-RPAS-A17 (pinhole adjustable slot) HDL-HP-RPASHW-A17 (shower, not available in trimless)	T trimmed TL trimless (not available for use with RPASHW trim) MWK millwork (not available for use with RPASHW trim)		RD/RA Trims <u>Trimmed</u> MBW matte black, white flange MWW matte white, white flange SLVW matte silver, white flange MBB matte black, black flange SLVS matte silver, silver flange <u>RPA/RPAS/RPASHW Trims (T/TL/MWK)</u> MB matte black MW matte white SLV matte silver PC polished chrome (not available for use with MWK) BN brushed nickel (not available for use with MWK)	<u>Trimless/Millwork</u> MB matte black MW matte white SLV matte silver
4	Beam Spread	5	Color Temp	6	Options/Accessories
	RD/RA <u>RPA/RPAS/RPASHW</u> SP^{T24} SP^{T24} NF^{T24} NF^{T24} MFL^{T24} MFL^{T24} FL^{T24} FL^{T24} WF^{T24} VWF^{T24} LS SP spot 15°, NF narrow flood 22°, MFL medium flood 25°, FL flood 28°, WF wide flood 45°, VWF very wide flood 60°, LS linear spread lens 60°x10°	83 CRI 90+ CRI^{T24} 27 2700K-83 229 2200K-90+ 30 3000K-83 279 2700K-90+ 35 3500K-83 309 3000K-90+ 40 4000K-83 359 3500K-90+ 409 4000K-90+	CRISP CrispWhite (18W max) 3CLA 3000K Class A	(not JA8/Title 24 compliant) HEX hexcell louver (not available for use with RPASHW trim) SOL solite beam softening lens (comes standard with RPASHW trim)	

^{T24} JA8/Title 24 Compliant



Delta Intelligent Building Technologies

178 Bauer Drive, Oakland, NJ 07436 • P: 973-882-5010 F: 973-882-2605 • amerlux.com
Amerlux reserves the right to change details that do not affect overall function and performance.
LIT-2038 • 02/28/25 • Page 2 of 14

PROJECT:

TYPE:

Specifications

Application

Retail and commercial ambient, accent & display lighting

Construction

20 ga. galvanized steel frame
18 ga. galvanized steel splice housing and hanger brackets (*not for Remodeler version*)
Cast aluminum plaster frame with perforated face (*for trimless version only*)
Die-cast optical housing and trim
Die-cast heat sink

Optical

Tilt: 0-30° (*RA/RPAS trims*), 0-20° (*RPA/RPASHW trims*)
Beam Spreads: Spot, 15°; Narrow Flood, 22°; Medium Flood, 25°;
Flood, 28°; Wide Flood, 45°; Very Wide Flood, 60°;
Linear Spread, 60° x 10°

LED

Color Temp Options: 2200K, 2700K, 3000K, 3500K, 4000K
CRI: 83 typ. (*2700K, 3000K, 3500K, 4000K*)
90+ typ. (*2200K, 2700K, 3000K, 3500K, 4000K*)
CrispWhite* LED (*18W max*) & Class A** 3000K (*high CRI, high gamut*)
R9 Values: 11 (83 CRI), 55 (92 CRI)
Binning: 3 MacAdam (SDCM)
Life: 50,000+ hrs, > 70% of initial lumens at 50,000 hrs
* *CrispWhite: CrispWhite Technology delivers the warmth of colors expected from a high 90 CRI solution but also creates the natural crisp white color that is pleasing to the eye. It creates the most impactful lighting ever available, by revealing the richest whites and vibrant colors that pop.*
** *Class A LED: Class A LED's have a CRI > 80 and a GAI > 80. CRI defines color "Naturalness" and GAI defines color "Saturation." Both being high delivers rich colors and pure whites.*

Electrical

Wattage: 13W, 18W, 20W
Electronic constant current LED driver, 120/277VAC input
This product complies with IEEE C62.41 for surge endurance up to 2.5KV. Amerlux® recommends using additional surge protection with this unit (supplied by others), surge and over voltage damage is not covered under warranty.
Note: Drivers are universal but thermal protector is voltage specific

Drivers

LE/TE - Leading Edge (*Triac, Forward Phase*) or Trailing Edge (*ELV, Reverse Phase*)
0-10V, Lutron and DALI systems also available
See pages 12-13 for more dimming information

Finish

Powder coat paint/wet paint
Consult factory for custom finishes

Mounting

26" Hanger bars included (*except for Remodeler versions*)
Optional **HB49** - hanger bars from min 29" to max 49" available
Trimmed Fixture:
For use in grid or sheetrock ceilings, 5/8" - 2" standard
Trimless Fixture (*not available with Shower trim*):
For use in sheetrock ceilings, max ceiling thickness 5/8"
Millwork Fixture:
Millwork extension collars are based on ceiling material specifications and thickness. Provides flush trim appearance level with ceiling material.
Max thickness 2"
Not available for use with Remodeler model

Certifications

CSA damp as tested to UL 1598 standards
IC/AT rated (*optional, 13W & 18W only*)
JAB/Title 24 Compliant (*see ordering page for options that apply*)
Damp location
Wet location (*RPASHW trim only*)

Warranty

5 year limited warranty

Emergency Battery Pack (EM)

Powers fixture at 5.1 watts (*approx. 400 Lm*) for 90 minutes (*not for use with REM, OP or IC versions*)
See wiring schematic on pg 14.

Accessories (*diagram shows installation order*)






Hexcell, optical film, solite lens


PROJECT:

TYPE:


Product Details - Trimmed

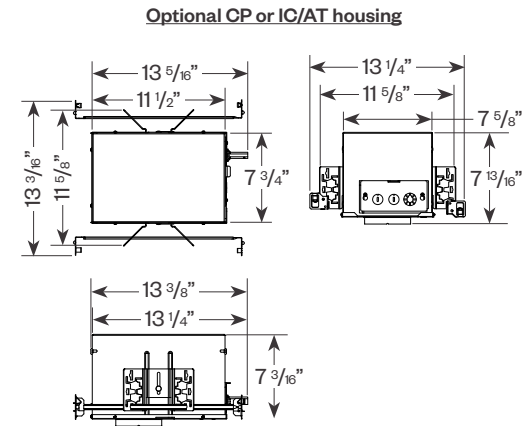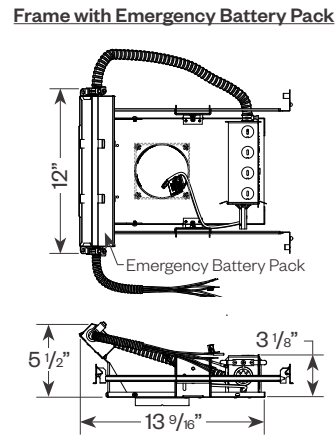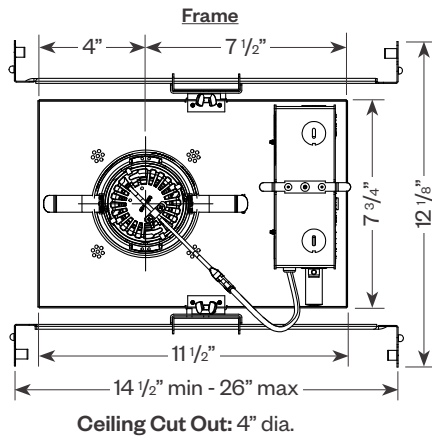


Downlight

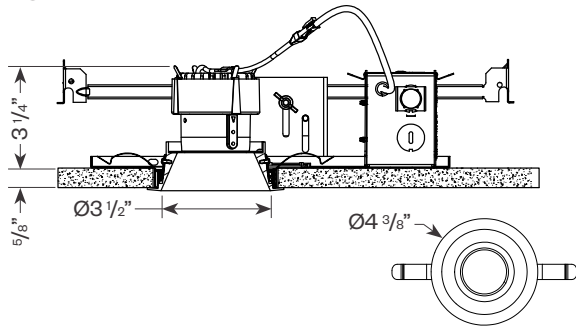


Adjustable

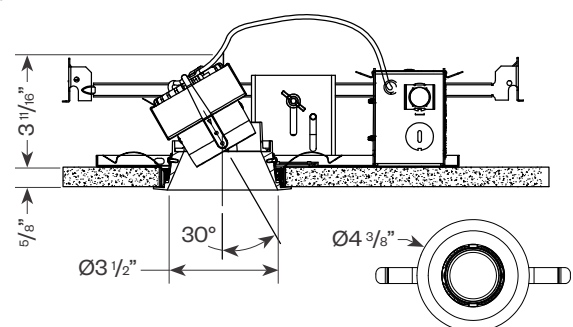



Pinhole Adjustable

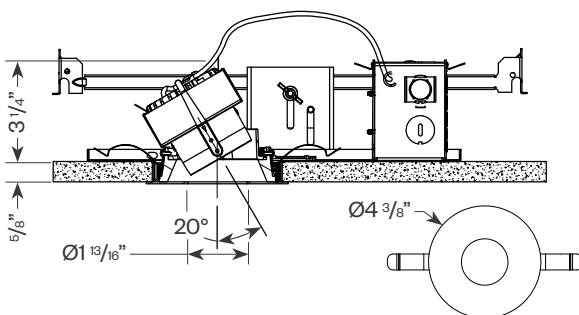

Pinhole Adjustable Shower

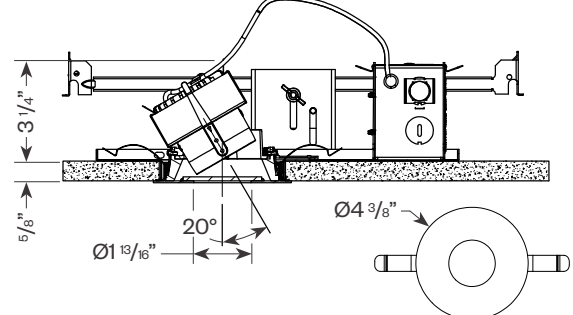

Pinhole Adjustable Slot

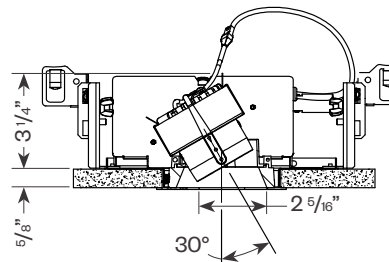
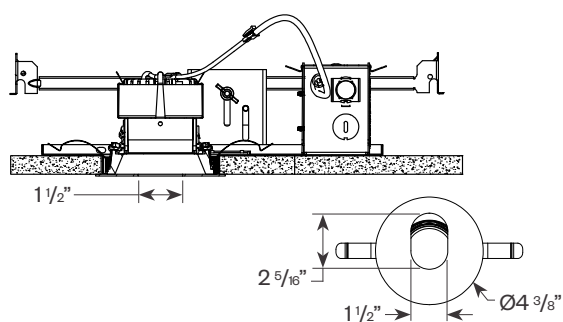


PROJECT:



TYPE:

Product Details - Trimless & Millwork



Downlight

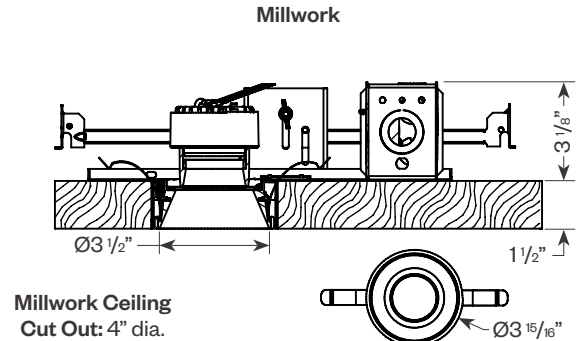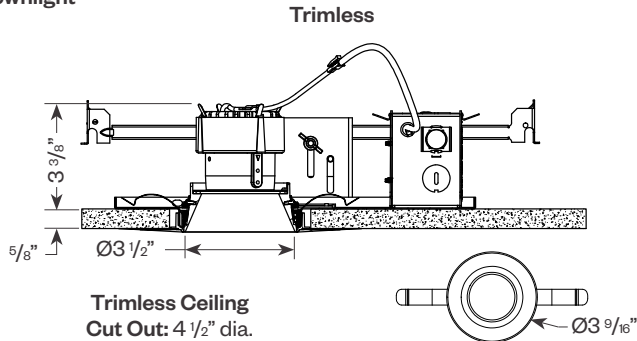

Adjustable

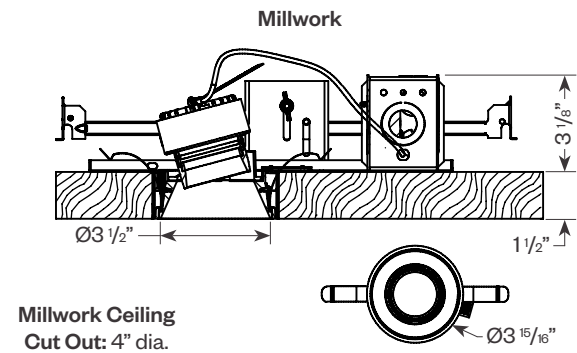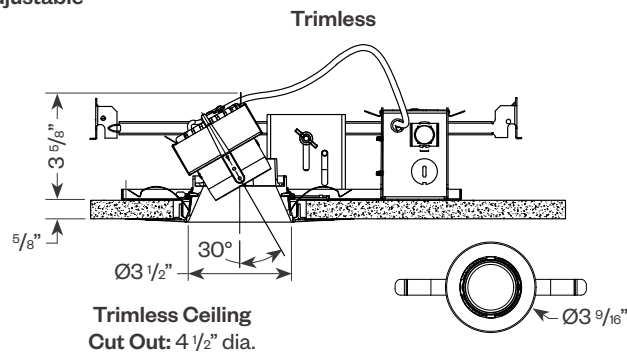


Pinhole Adjustable/Pinhole Adjustable Slot

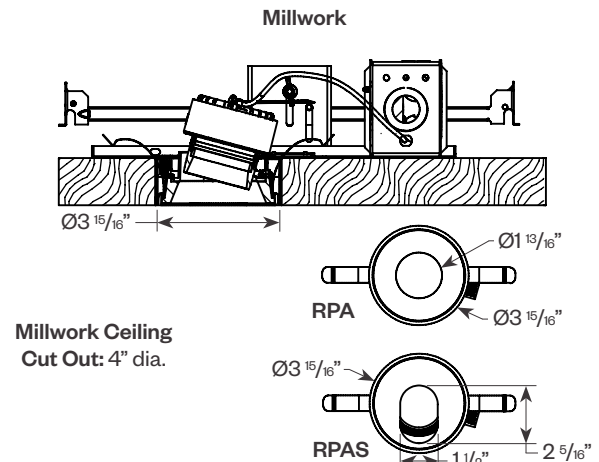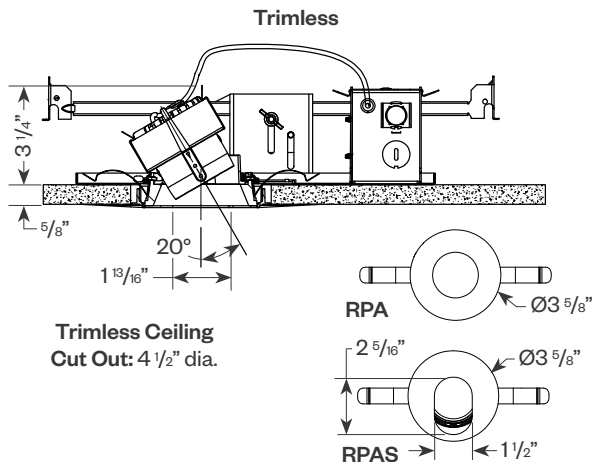


Plaster Frame Installation Detail (for trimless fixture only)

1. Reflector Trim
2. Aperture Plate
3. Ceiling 5/8"
4. Cast Aluminum Plaster Frame
5. Plaster Skim Coat (by others)
6. 6-32 Type F Thread Cutting Screw



Millwork Detail

1. Reflector Trim
2. Millwork Ring
3. Aperture Plate
4. Wood Ceiling 2" Max
5. Extension collar (see ordering information for ceiling thicknesses)
6. 1/16" required for trim to be flush with ceiling



Hornet® HP



Round Downlights



PROJECT:


TYPE:

Product Details - Remodeler Trimmed

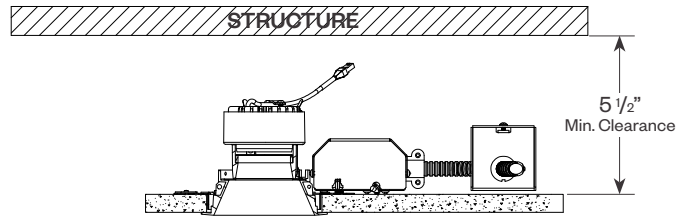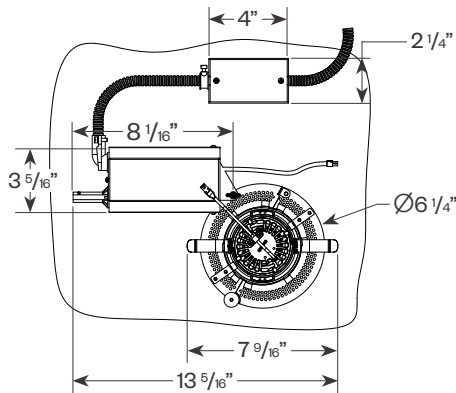


Ceiling Cut Out: 4" dia.


Downlight

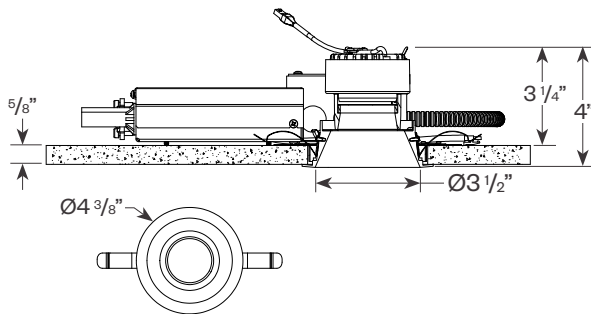


Adjustable

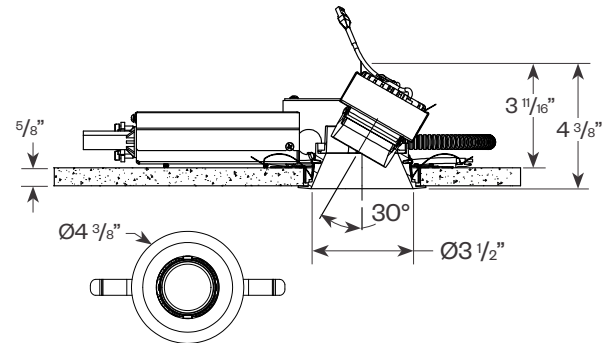



Pinhole Adjustable

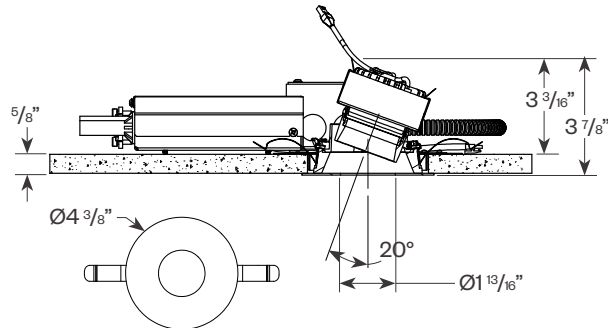

Pinhole Adjustable Shower

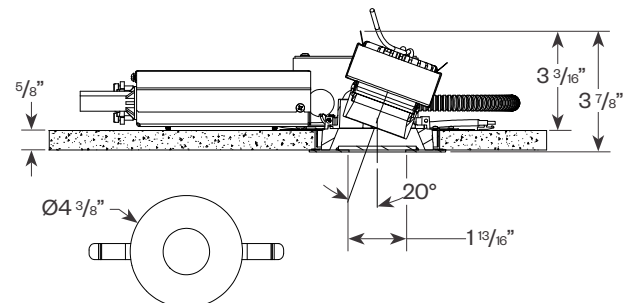

Pinhole Adjustable Slot

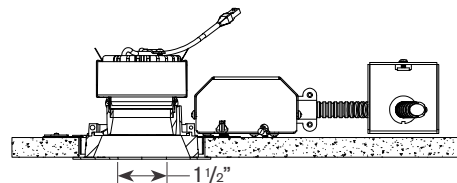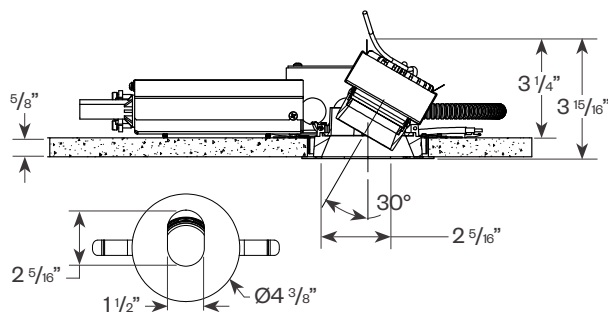

Hornet® HP



Round Downlights



PROJECT:


TYPE:

Product Details - Remodeler Trimless

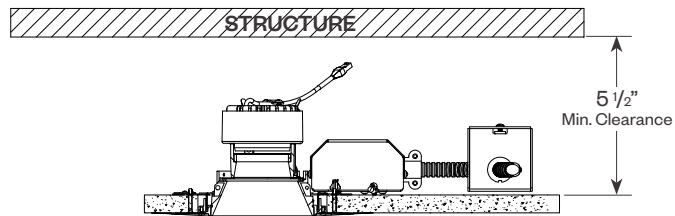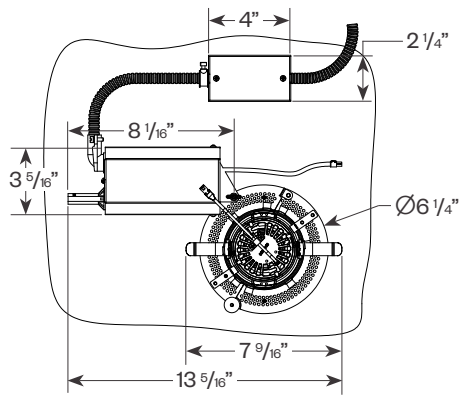


Trimless Ceiling Cut Out: 4 1/2" dia.


Downlight

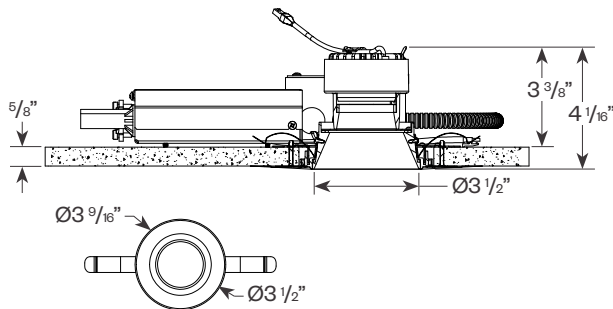



Adjustable

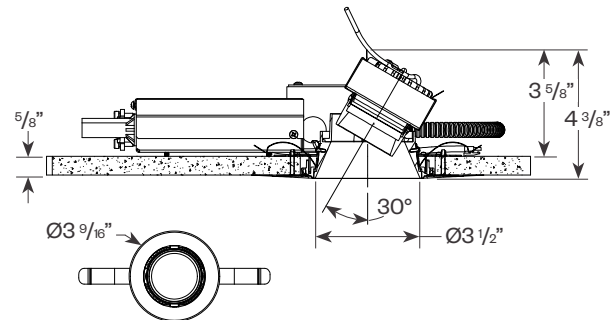

Pinhole Adjustable

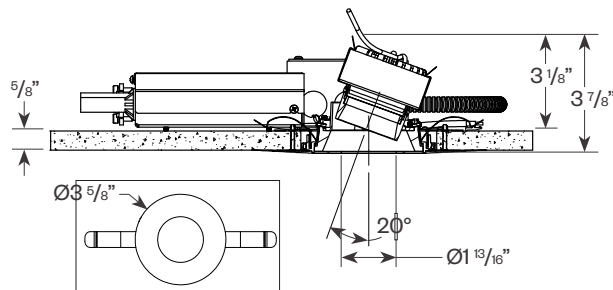

Pinhole Adjustable Slot

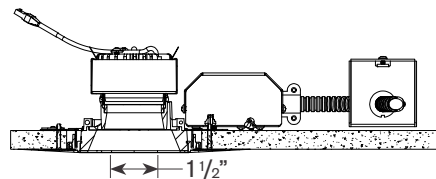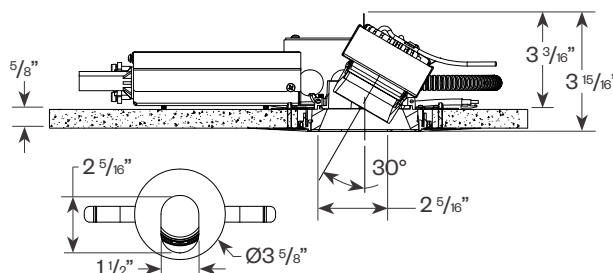

Hornet® HP

Round Downlights



PROJECT:

TYPE:

Performance Data - Round Downlight (HDL-HP-RD)

Multiplying Factors: (Multiplying Factor is based on 3000K-83 120V IES file on website)


Wattage:	13W	18W	20W
Factor:	0.65	0.90	1.0

CCT:	2700K-83	3000K-83	3500K-83	4000K-83
Factor:	0.96	1.0	1.02	1.04

CCT:	2200K-90+	2700K-90+	3000K-90+	3500K-90+	4000K-90+	CRISP	3CLA
Factor:	0.71	0.80	0.83	0.87	0.90	0.65	0.75


20W LED, 3000K-83

Spot (SP) Distribution, 15°
LTL #818231
Lumens: 1,323




Candelas at Nadir	
Deg	Candela
0	12508
5	8495
15	1754
25	190
35	32
45	3

Narrow Flood (NF) Distribution, 22°
LTL #818232
Lumens: 1,236




Candelas at Nadir	
Deg	Candela
0	7734
5	6428
15	1866
25	277
35	45
45	4

Flood (FL) Distribution, 28°
LTL # 818234
Lumens: 1,185



Candelas at Nadir	
Deg	Candela
0	4591
5	4168
15	1966
25	470
35	72
45	4

Wide Flood (WF) Distribution, 45°
LTL # 818235
Lumens: 1,123



Candelas at Nadir	
Deg	Candela
0	2751
5	2614
15	1719
25	676
35	141
45	7

Application Data - Round Downlight (HDL-HP-RD)

Notes and Definitions:


Beam spread is to 50% center beam candlepower (CBCP).

D=Distance to floor or wall.

FC=Footcandles on floor or wall at center beam aiming location.

L=Effective Visual Beam length in feet (50% of maximum footcandle level).

W=Effective Visual Beam width in feet (50% of maximum footcandle level).



	0° Aiming Angle Horizontal Footcandles			
	D	FC	L	W
Spot	5.0'	292	1.9	1.9
	7.5'	163	2.6	2.6
	10.0'	102	3.2	3.2
	12.5'	69	3.7	3.7

	0° Aiming Angle Horizontal Footcandles			
	D	FC	L	W
Narrow Flood	5.0'	231	2.1	2.1
	7.5'	120	2.9	2.9
	10.0'	71	3.7	3.7
	12.5'	47	4.6	4.6

	0° Aiming Angle Horizontal Footcandles			
	D	FC	L	W
Flood	5.0'	150	2.7	2.7
	7.5'	74	3.6	3.6
	10.0'	43	4.8	4.8
	12.5'	28	5.8	5.8

	0° Aiming Angle Horizontal Footcandles			
	D	FC	L	W
Wide Flood	5.0'	97	3.2	3.2
	7.5'	46	4.6	4.6
	10.0'	27	6.1	6.1
	12.5'	17	7.5	7.5

Hornet® HP

Round Downlights



PROJECT:

TYPE:

Performance Data - Round Adjustable (HDL-HP-RA)

Multiplying Factors: (Multiplying Factor is based on 3000K-83 120V IES file on website)


Wattage:	13W	18W	20W
Factor:	0.65	0.90	1.0

CCT:	2700K-83	3000K-83	3500K-83	4000K-83
Factor:	0.96	1.0	1.02	1.04

CCT:	2200K-90+	2700K-90+	3000K-90+	3500K-90+	4000K-90+	CRISP	3CLA
Factor:	0.71	0.80	0.83	0.87	0.90	0.65	0.75

20W LED, 3000K-83


Spot (SP) Distribution, 15°
LTL #818224
Lumens: 1,332



Candelas at Nadir

Deg	Candela
0	11367
5	8488
15	1846
25	199
35	38
45	3


Narrow Flood (NF) Distribution, 22°
LTL #818225
Lumens: 1,238



Candelas at Nadir

Deg	Candela
0	7412
5	6254
15	1895
25	288
35	49
45	4


Flood (FL) Distribution, 28°
LTL # 818227
Lumens: 1,193



Candelas at Nadir

Deg	Candela
0	4527
5	4117
15	1963
25	488
35	77
45	5

Wide Flood (WF) Distribution, 45°
LTL # 818228
Lumens: 1,138



Candelas at Nadir

Deg	Candela
0	2747
5	2609
15	1715
25	693
35	149
45	8

Application Data - Round Adjustable (HDL-HP-RA)

Notes and Definitions:


Beam spread is to 50% center beam candlepower (CBCP).

D=Distance to floor or wall.

FC=Footcandles on floor or wall at center beam aiming location.

L=Effective Visual Beam length in feet (50% of maximum footcandle level).

W=Effective Visual Beam width in feet (50% of maximum footcandle level).



	0° Aiming Angle Horizontal Footcandles			
	D	FC	L	W
Spot	5.0'	286	1.9	1.9
	7.5'	157	2.7	2.7
	10.0'	97	3.3	3.3
	12.5'	65	3.9	3.9

	0° Aiming Angle Horizontal Footcandles			
	D	FC	L	W
Narrow Flood	5.0'	215	2.2	2.2
	7.5'	112	3.0	3.0
	10.0'	67	3.8	3.8
	12.5'	44	4.7	4.7

	0° Aiming Angle Horizontal Footcandles			
	D	FC	L	W
Flood	5.0'	148	2.7	2.7
	7.5'	73	3.7	3.7
	10.0'	43	4.8	4.8
	12.5'	28	5.9	5.9

	0° Aiming Angle Horizontal Footcandles			
	D	FC	L	W
Wide Flood	5.0'	97	3.2	3.2
	7.5'	46	4.6	4.6
	10.0'	26	6.1	6.1
	12.5'	17	7.6	7.6

PROJECT:

TYPE:

Performance Data - Round Pinhole Adjustable (HDL-HP-RPA)

Multiplying Factors: (Multiplying Factor is based on 3000K-83 120V IES file on website)


Wattage:	13W	18W	20W
Factor:	0.65	0.90	1.0

CCT:	2700K-83	3000K-83	3500K-83	4000K-83
Factor:	0.96	1.0	1.02	1.04

CCT:	2200K-90+	2700K-90+	3000K-90+	3500K-90+	4000K-90+	CRISP	3CLA
Factor:	0.71	0.80	0.83	0.87	0.90	0.65	0.75


20W LED, 3000K-83

Spot (SP) Distribution, 15°
LTL #818216
Lumens: 1,099




Candelas at Nadir	
Deg	Candela
0	11209
5	7888
15	1423
25	64
35	6
45	1

Narrow Flood (NF) Distribution, 22°
LTL #818217
Lumens: 959




Candelas at Nadir	
Deg	Candela
0	7083
5	5941
15	1387
25	99
35	8
45	0

Medium Flood (MFL) Distribution, 28°
LTL # 818218
Lumens: 899



Candelas at Nadir	
Deg	Candela
0	4898
5	4358
15	1508
25	176
35	10
45	0

Flood (FL) Distribution, 45°
LTL # 818219
Lumens: 876



Candelas at Nadir	
Deg	Candela
0	4293
5	3897
15	1526
25	198
35	11
45	0

Application Data - Round Pinhole Adjustable (HDL-HP-RPA)

Notes and Definitions:


Beam spread is to 50% center beam candlepower (CBCP).

D=Distance to floor or wall.

FC=Footcandles on floor or wall at center beam aiming location.

L=Effective Visual Beam length in feet (50% of maximum footcandle level).

W=Effective Visual Beam width in feet (50% of maximum footcandle level).



0° Aiming Angle Horizontal Footcandles	
D	FC
5.0'	265
7.5'	148
10.0'	92
12.5'	63

0° Aiming Angle Horizontal Footcandles	
D	FC
5.0'	201
7.5'	106
10.0'	64
12.5'	42

0° Aiming Angle Horizontal Footcandles	
D	FC
5.0'	153
7.5'	77
10.0'	45
12.5'	30

0° Aiming Angle Horizontal Footcandles	
D	FC
5.0'	138
7.5'	69
10.0'	40
12.5'	26

PROJECT:

TYPE:

Performance Data - Round Pinhole Adjustable Slot (HDL-HP-RPAS)

Multiplying Factors: (Multiplying Factor is based on 3000K-83 120V IES file on website)


Wattage:	13W	18W	20W
Factor:	0.65	0.90	1.0

CCT:	2700K-83	3000K-83	3500K-83	4000K-83
Factor:	0.96	1.0	1.02	1.04

CCT:	2200K-90+	2700K-90+	3000K-90+	3500K-90+	4000K-90+	CRISP	3CLA
Factor:	0.71	0.80	0.83	0.87	0.90	0.65	0.75

20W LED, 3000K-83


Spot (SP) Distribution, 15°
LTL #818220
Lumens: 1,016



Candelas at Nadir

Deg	Candela
0	8708
5	7439
15	1282
25	33
35	5
45	0


Narrow Flood (NF) Distribution, 22°
LTL #818221
Lumens: 909



Candelas at Nadir

Deg	Candela
0	6311
5	5258
15	1202
25	62
35	7
45	0


Medium Flood (MFL) Distribution, 28°
LTL #818222
Lumens: 851



Candelas at Nadir

Deg	Candela
0	4560
5	3994
15	1320
25	116
35	8
45	0

Flood (FL) Distribution, 45°
LTL #818223
Lumens: 833



Candelas at Nadir

Deg	Candela
0	4055
5	3556
15	1218
25	113
35	8
45	0

Application Data - Round Pinhole Adjustable Slot (HDL-HP-RPAS)

Notes and Definitions:


Beam spread is to 50% center beam candlepower (CBCP).

D=Distance to floor or wall.

FC=Footcandles on floor or wall at center beam aiming location.

L=Effective Visual Beam length in feet (50% of maximum footcandle level).

W=Effective Visual Beam width in feet (50% of maximum footcandle level).



0° Aiming Angle
Horizontal
Footcandles

Spot	D	FC	L	W
5.0'	233	2.0	1.9	
7.5'	127	2.6	2.6	
10.0'	77	3.3	3.3	
12.5'	52	4.0	4.0	

0° Aiming Angle
Horizontal
Footcandles

Narrow Flood	D	FC	L	W
5.0'	180	2.2	2.0	
7.5'	94	2.9	2.8	
10.0'	57	3.8	3.6	
12.5'	38	4.6	4.5	

0° Aiming Angle
Horizontal
Footcandles

Flood	D	FC	L	W
5.0'	140	2.3	2.3	
7.5'	71	3.3	3.1	
10.0'	42	4.3	4.1	
12.5'	28	5.2	5.2	

0° Aiming Angle
Horizontal
Footcandles

Wide Flood	D	FC	L	W
5.0'	127	2.5	2.3	
7.5'	64	3.6	3.2	
10.0'	38	4.6	4.2	
12.5'	25	5.8	5.4	

Hornet® HP

Round Downlights



PROJECT:

TYPE:

Dimming Compatibility

Amerlux® Hornet® fixtures are compatible with all major dimming protocols prevalent in the United States. Please see below for general compatibilities and wiring diagrams. Amerlux recommends testing your unique dimming configuration as the exact full configuration (Dimmer, Fixture Quantity, Voltage, etc) may affect dimming performance.

--- NOTE: INFORMATION BELOW IS FOR WIRED DIMMERS ONLY. FOR WIRELESS DIMMERS, CONSULT FACTORY ---


TRIAC (Forward Phase) DIMMING (Standard)

Utilizes standard TRIAC dimmers that are in wide use in installations across the US. Best for retrofit applications where TRIAC dimmers are installed.

Notes:

- 120VAC or 277VAC*
- Dims down to 5% light output (most cases)
- Consult Dimming manufacturer for installation instructions - **DO NOT SHARE NEUTRALS!**
- Must meet dimmer Minimum Load Requirements per dimming manufacturer

TRIAC Wiring Diagram

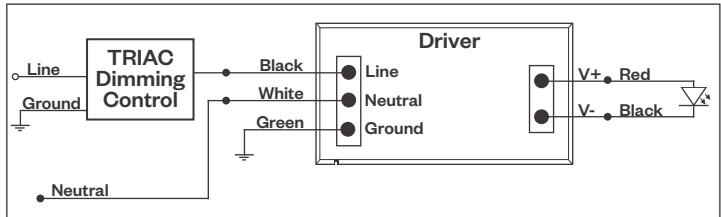

Compatible Dimmers†:

Wall Box (TRIAC 120VAC)	Central System
Lutron "Diva"	Lutron "GP" Panel
Lutron "Nova-T"	Lutron Grafik Eye QS
Lutron "Maestro"	
Lutron "Skylark"	


ELV - Electronic Low Voltage (Reverse Phase) DIMMING (Standard)

Utilizes specialized "ELV" dimmers.

Notes:

- 120VAC or 277VAC*
- Dims down to 5% light output (most cases)
- Consult Dimming manufacturer for installation instructions - **DO NOT SHARE NEUTRALS!**
- Must meet dimmer Minimum Load Requirements per dimming manufacturer

ELV Wiring Diagram

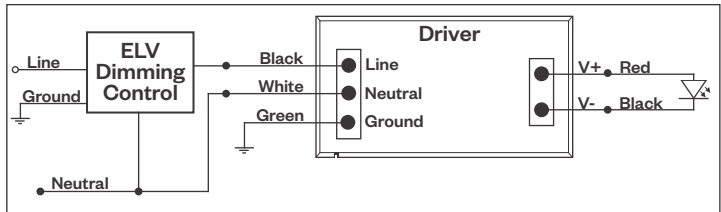

Compatible Dimmers†:

Wall Box (ELV 120VAC)	Wall Box (ELV 277VAC)	Central System
Lutron "Diva"	Leviton Revoir II AWSMT-E	Lutron "GP" Panel with PHPM-PA 120/277VAC
Lutron "Nova-T"		Lutron Grafik Eye QS with PHPM-PA 120/277VAC
Lutron "Maestro"		
Lutron "Skylark"		
Leviton "Surslide"		
Leviton "Vizio"		

Notes:

* Driver is 277VAC dimmable with appropriate dimmer (by others). All provided wiring diagrams show 120VAC wiring colors and method. Please refer to 277VAC dimmer installation instructions for 277VAC wiring diagrams.

† The absence of a dimmer from the lists above does not imply incompatibility. Please consult factory for compatibility inquiries.

Hornet® HP

Round Downlights



PROJECT:

TYPE:

Dimming Compatibility *(continued)*

Amerlux® Hornet® fixtures are compatible with all major dimming protocols prevalent in the United States. Please see below for general compatibilities and wiring diagrams. Amerlux recommends testing your unique dimming configuration as the exact full configuration (Dimmer, Fixture Quantity, Voltage, etc) may affect dimming performance.

--- NOTE: INFORMATION BELOW IS FOR WIRED DIMMERS ONLY. FOR WIRELESS DIMMERS, CONSULT FACTORY ---


0-10V DIMMING

Integrates into a variety of building management and daylighting controls

Notes:

- 120VAC or 277VAC*
- Dims down to 1% light output
- Requires interface to turn off power to driver
- Consult Dimming manufacturer for installation instructions - **DO NOT SHARE NEUTRALS!**

0-10V Wiring Diagram

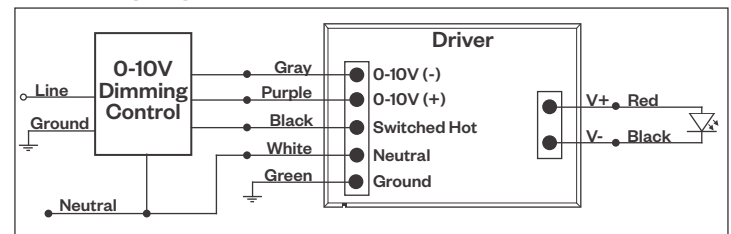

Compatible Dimmers*:

Wall Box	Central System
Lutron "Diva" - DVSTV	Lutron Grafik Eye with GRX-TVI Interface
Leviton Renoir II 0-10V	


LUTRON LDE1 DIMMING

Integrates into Lutron EcoSystem building management

Notes:

- 120VAC or 277VAC*
- Dims down to 1% light output
- EcoSystem Control
- Consult Dimming manufacturer for installation instructions - **DO NOT SHARE NEUTRALS!**

LDE1 (HILUME-H-ECO) EcoSystem Digital Control Wiring Diagram

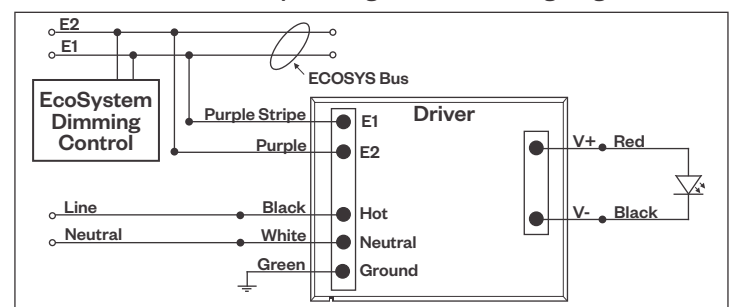

Compatible Dimmers*:

Lutron ECO System	Central System
Pow Pak Dimming Modules	Lutron EcoSystem compatible controls
Energj Savr Node	
Grafik Eye QS/Homeworks	
QS Control Unit	
Quantum Hub	
Homeworks QS/My Room	


DALI DIMMING

Digital control protocol allows individual fixture control

Notes:

- 120VAC - 277VAC*
- Dims down to 1% light output in most cases

DALI Wiring Diagram

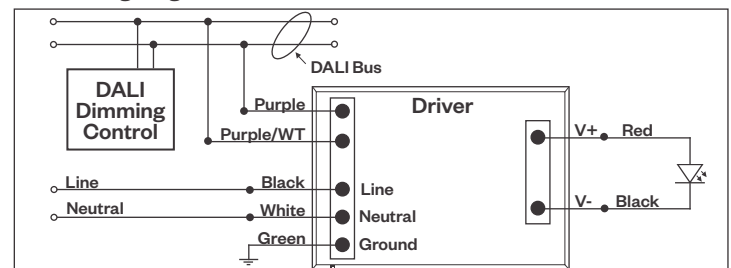

Notes:

* Driver is 277VAC dimmable with appropriate dimmer (by others). All provided wiring diagrams show 120VAC wiring colors and method. Please refer to 277VAC dimmer installation instructions for 277VAC wiring diagrams.

* The absence of a dimmer from the lists above does not imply incompatibility. Please consult factory for compatibility inquiries.

PROJECT:

TYPE:

Emergency Battery Pack

Wiring Diagram

