

# Solace

## 3" Shallow Round Lens Wall Wash



Lens Wall Wash

### PROJECT:



Lens Wall Wash Trimless



### Features

Solace 3" Downlights are the complete downlight family for any ceiling surface and low plenum ceiling. Round or Square apertures, available as downlight, adjustable or wallwash. Optional Solite lensing provides whisper quiet aesthetics. The trim options available as trimmed, trimless or millwork. The pinhole and shower pinhole trim makes this a complete a downlight to design the entire space with the same look.

### Product Overview

Type:	Shallow Round Lens Wall Wash
Wattage:	8, 12, 17
Max Lumen Output:	1066 lm; 62.8 lm/W
CBCP:	602 max
Color Temp:	2700K, 3000K, 3500K, 4000K
CRI:	83 typ. 90+ typ. CrispWhite & 3K Class A available
Dimming:	TRIAC & ELV - 5% Dim 0-10V - 1% Dim Lutron Hi-lume® H Series/EcoSystem - 1% dim with soft on Lutron Hi-lume EcoSystem Premier 0.1% dim with soft on & fade to black

### TYPE:

### Fixture Type

Round/Square	New Construction	Trimmed	Trimless	Millwork
Yes	Yes	Yes	Yes	Yes

See separate spec sheet for Square trim fixture

### Performance Chart (see page 5 for full breakdown)

Watts	Delivered Lumens	LPW	CBCP	Color Temp
8	565	67	319	3000K-83
12	831	67	470	3000K-83
17	1066	63	602	3000K-83

Data is based on 3000K-83 IES files available on website.

### Electrical Data

	8W		12W		17W	
	System Watts	Amps	System Watts	Amps	System Watts	Amps
120V	8	0.067	12	0.10	17	0.142
277V	8	0.029	12	0.043	17	0.061

Electronic constant current LED driver



# Solace Round Lens Wall Wash

3" Shallow Round Lens Wall Wash



## PROJECT:

## TYPE:

### Housing/Frame Ordering Information

1	2	3	4	5	6	7
<p><b>1</b> <u>Model</u>  <b>SOL-RLW-NC</b> (New Construction &amp; Insulated Ceiling (IC rated))  <b>SOL-RLW-CP</b> (Chicago Plenum (CCEA) housing)  <b>SOL-RLW-IC</b> (Insulated Ceiling (IC rated) &amp; Air Tight)</p>	<p><b>2</b> <u>Style</u>  <b>T</b> - trimmed, 2" max ceiling thickness  <b>TL</b> - trimless, 5/8" max ceiling thickness  <b>MWK</b> - millwork (for 1/2" - 11/16" ceiling thickness)  <b>MWK1</b> - millwork (for 3/4" - 1-1/2" ceiling thickness)  <b>MWK2</b> - millwork (for 1-1/2" - 2" ceiling thickness)</p>	<p><b>3</b> <u>Wattage</u> (3000K-83, See pg 5 for performance table)  <b>8</b> (565 lm)  <b>12</b> (831 lm)  <b>17</b> (1066 lm)</p>	<p><b>4</b> <u>Voltage</u>  <b>120/277</b> - universal voltage</p>	<p><b>5</b> <u>Color Temp</u>  <b>83 CRI</b> <u>90+ CRI</u>  <b>27</b> - 2700K-83 <b>279</b> - 2700K-90+ <b>CRISP*</b> - CrispWhite  <b>30</b> - 3000K-83 <b>309</b> - 3000K-90+ <b>3CLA*</b> - 3K Class A  <b>35</b> - 3500K-83 <b>359</b> - 3500K-90+  <b>40*</b> - 4000K-83 <b>409*</b> - 4000K-90+  <b>* Consult factory for lead time</b></p>	<p><b>6</b> <u>Driver</u> (for non-dimming, select LE/TE option)  <b>LE/TE</b> - TRIAC/ELV, 5% dim  <b>O-10V</b> - 0-10V, 1% dim  <b>HILUME-H-ECO</b> - Lutron Hi-Lume EcoSystem 1% dim with soft on &amp; fade to black  <b>HILUME-P-ECO</b> - Lutron Hi-lume EcoSystem Premier 0.1% dim with soft on &amp; fade to black</p>	<p><b>7</b> <u>Options</u>  <b>HB49</b> - hanger bars from min 29" to max 49" (26" hanger bars included as default option)</p>

### Trim Ordering Information

1	2	3												
<p><b>1</b> <u>Model</u>  <b>SOL-RLW</b> (wall wash)</p>	<p><b>2</b> <u>Style</u>  <b>T</b> - trimmed  <b>TL</b> - trimless  <b>MWK</b> - millwork</p>	<p><b>3</b> <u>Finish</u></p> <table border="0"> <tr> <td><u>Trimmed</u></td> <td><u>Trimless/Millwork</u></td> </tr> <tr> <td><b>MBW</b> - matte black, white flange</td> <td><b>MB</b> - matte black</td> </tr> <tr> <td><b>MWW</b> - matte white, white flange</td> <td><b>MW</b> - matte white</td> </tr> <tr> <td><b>SLVW</b> - matte silver, white flange</td> <td><b>SLV</b> - matte silver</td> </tr> <tr> <td><b>MBB</b> - matte black, black flange</td> <td></td> </tr> <tr> <td><b>SLVS</b> - matte silver, silver flange</td> <td></td> </tr> </table>	<u>Trimmed</u>	<u>Trimless/Millwork</u>	<b>MBW</b> - matte black, white flange	<b>MB</b> - matte black	<b>MWW</b> - matte white, white flange	<b>MW</b> - matte white	<b>SLVW</b> - matte silver, white flange	<b>SLV</b> - matte silver	<b>MBB</b> - matte black, black flange		<b>SLVS</b> - matte silver, silver flange	
<u>Trimmed</u>	<u>Trimless/Millwork</u>													
<b>MBW</b> - matte black, white flange	<b>MB</b> - matte black													
<b>MWW</b> - matte white, white flange	<b>MW</b> - matte white													
<b>SLVW</b> - matte silver, white flange	<b>SLV</b> - matte silver													
<b>MBB</b> - matte black, black flange														
<b>SLVS</b> - matte silver, silver flange														

# Solace Round Lens Wall Wash

3" Shallow Round Lens Wall Wash



## PROJECT:

## TYPE:

### Specifications

#### Application

Retail and commercial wall wash lighting

#### Housing Construction

20 ga. steel painted matte black  
Extruded aluminum heatsink  
Formed aperture plate with 5/8" lip (GB-standard)  
Cast aluminum plaster frame with perforated face (for trimless option)  
Integral adjustable locking mounting bars inherently protected

#### Reflector Trim Construction

Die-cast reflector  
Injection molded optic lens

#### LED

Color Temp Options: 2700K, 3000K, 3500K, 4000K  
CRI: 83 typ. (2700K, 3000K, 3500K, 4000K)  
90+ typ. (2700K, 3000K, 3500K, 4000K)  
CrispWhite\* & Class A\*\* 3000K (high gamut) available  
R9 Values: 11 (83 CRI), 55 (92 CRI)  
Binning: 3 MacAdam (SDCM)  
Life: 50,000+ hrs, > 70% of initial lumens at 50,000 hrs

*\*CrispWhite: CrispWhite Technology delivers the warmth of colors expected from a high 90 CRI solution but also creates the natural crisp white color that is pleasing to the eye. It creates the most impactful lighting ever available, by revealing the richest whites and vibrant colors that pop.*

*\*\*Class A LED: Class A LED's have a CRI > 80 and a GAI > 80. CRI defines color "Naturalness" and GAI defines color "Saturation." Both being high delivers rich colors and pure whites.*

#### Electrical

Wattage: 8, 12, 17  
Electronic constant current LED driver, 120/277VAC input  
**This product complies with IEEE C62.41 for surge endurance up to 2.5KV. Amerlux® recommends using additional surge protection with this unit (supplied by others), surge and over voltage damage is not covered under warranty.**  
Emergency option available through circuiting/inverter only

#### Drivers

LE/TE - Leading Edge, TRIAC, forward phase/Trailing Edge, ELV, reverse phase (standard)  
0-10V, and Lutron systems also available  
See pages 7-8 for more dimming information

#### Finish (Trim)

Powder coat paint

#### Mounting

26" Hanger bars included. Side brackets allow for rigid conduit pipe mounting along with additional 1/2" adjustment of housing vertical position  
Optional **HB49** - hanger bars from min 29" to max 49" available

#### Trimmed Fixture:

For use in grid or sheetrock ceilings, 5/8" - 2" standard

**Note: Ceiling thickness greater than 1" will affect beam pattern**

#### Trimless Fixture:

For use in sheetrock ceilings, max ceiling thickness 5/8"  
For sheetrock ceilings beyond 5/8" consult factory

#### Millwork Fixture:

Millwork extension collars are based on ceiling material specifications and thickness. Provides flush trim appearance level with ceiling material. Max thickness 2"

#### Certifications

CSA damp as tested to UL 1598 standards  
IC/AT rated

#### Warranty

5 year limited warranty

#### Weight

Housing and trim - 5 lbs.

# Solace Round Lens Wall Wash


3" Shallow Round Lens Wall Wash



**PROJECT:**


**TYPE:**

## Solace Round Lens Wall Wash

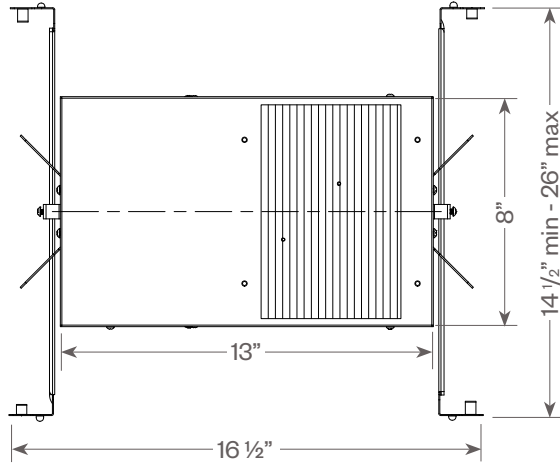


## Plaster Frame Installation Detail (for trimless fixture only)

1. Reflector Trim
2. Aperture plate
3. Ceiling 5/8"
4. Cast Aluminum Plaster Frame
5. Plaster Skim Coat (by others)
6. 6-32 Type F Thread Cutting Screw




## Millwork Detail

1. Reflector Trim
2. Millwork Ring
3. Aperture Plate
4. Wood Ceiling 2" Max
5. Extension collar (see ordering information for ceiling thicknesses)
6. 1/16" required for trim to be flush with ceiling




## Round Lens Wall Wash

### Trimmed

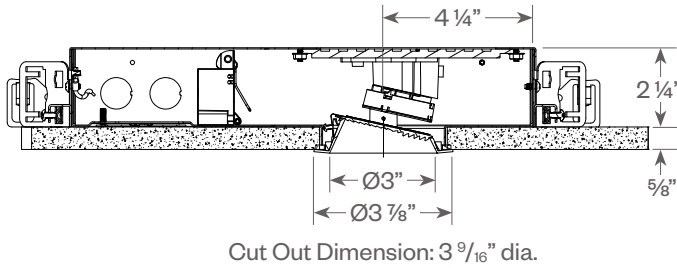

### Trimless

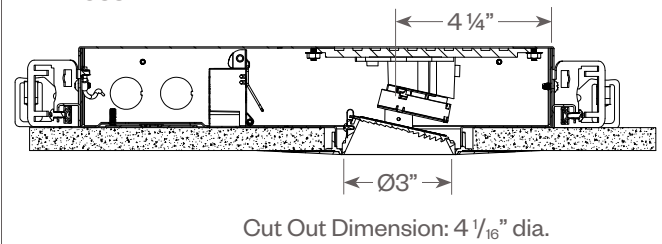

# Solace Round Lens Wall Wash

3" Shallow Round Lens Wall Wash



**PROJECT:**

**TYPE:**

## Solace Round Downlights Performance Breakdown

Wattage	Color Temp	Wall Wash	
		Lumens	LPW
8W	27	554	66
	30	565	67
	35	576	69
	40	593	71
	279	475	56
	309	492	59
	359	508	61
	409	508	61
	CRISP	367	44
	3CLA	395	47
12W	27	815	65
	30	831	67
	35	848	68
	40	873	70
	279	698	56
	309	723	58
	359	748	60
	409	748	60
	CRISP	540	43
	3CLA	582	47
17W	27	1045	62
	30	1066	63
	35	1087	64
	40	1119	66
	279	895	53
	309	927	55
	359	959	57
	409	959	57
	CRISP	693	41
	3CLA	746	44

# Solace Round Lens Wall Wash

3" Shallow Round Lens Wall Wash



## PROJECT:

## TYPE:

**FIXTURE DATA:** (Complete photometric data (.ies format) available upon request)


**MULTIPLYING FACTORS:** (Multiplying Factor is based on 3000K-83 120V IES file on website)

Wattage:	8W	12W	17W
Factor:	0.53	0.78	1.0

CCT:	2700K-83	3000K-83	3500K-83	4000K-83
Factor:	0.98	1.0	1.02	1.05

CCT:	2700K-90+	3000K-90+	3500K-90+	4000K-90+	CRISP	3CLA
Factor:	0.84	0.87	0.90	0.90	0.65	0.70

### Solace Round Lens Wall Wash (SOL-RLW) - 17W, 3000K-83

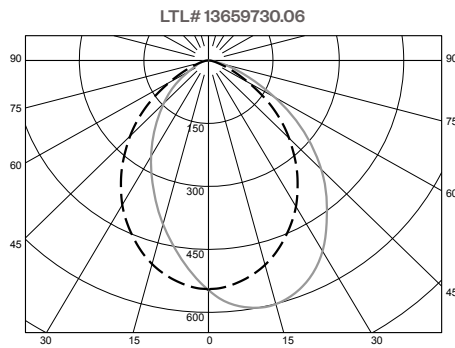

**ZONAL LUMEN SUMMARY**

Zone	Lumens	%Fixt
0-40	616	57.8
0-60	961	90.1
0-90	1067	100.1
90-180	0	0.00

Luminaire Efficacy: 62.8 Lm/W

### Application Data:

### Footcandles on Wall

Footcandles are average and rounded off.  
Data for multiple units are based on a minimum of five units.

#### 1.5 Feet from Wall

Distance from ceiling	← 1.5' → ← 1.5' → ← 1.5' → ← 1.5' →						
	0.5'	1.5'	2.5'	3.5'	4.5'	5.5'	6.5'
0.5'	35	41	42	42	42	40	35
1.5'	72	88	92	93	92	88	72
2.5'	57	70	76	77	76	70	57
3.5'	36	43	48	49	48	44	37
4.5'	23	27	30	31	30	28	23
5.5'	16	18	20	21	20	19	16
6.5'	12	13	14	15	14	13	12
7.5'	9	10	11	11	11	10	9

#### 1.5 Feet from Wall

Distance from ceiling	← 2' → ← 2' → ← 2' → ← 2' →						
	0.5'	1.5'	2.5'	3.5'	4.5'	5.5'	6.5'
0.5'	30	30	33	31	34	33	30
1.5'	61	67	71	70	72	69	61
2.5'	47	55	59	60	61	59	47
3.5'	29	35	38	39	40	38	29
4.5'	19	22	24	26	26	25	20
5.5'	13	15	17	18	18	17	14
6.5'	10	11	12	13	13	13	11
7.5'	8	9	10	10	10	10	8

#### 2 Feet from Wall

Distance from ceiling	← 2' → ← 2' → ← 2' → ← 2' →						
	0.5'	1.5'	2.5'	3.5'	4.5'	5.5'	6.5'
0.5'	14	15	17	16	17	17	15
1.5'	40	45	48	48	49	48	45
2.5'	41	50	53	55	55	53	42
3.5'	31	37	40	42	42	40	31
4.5'	22	26	28	30	30	28	22
5.5'	16	18	20	21	21	20	16
6.5'	12	14	15	16	16	15	12
7.5'	10	11	11	12	12	12	10

# Solace Round Lens Wall Wash

3" Shallow Round Lens Wall Wash



## PROJECT:

## TYPE:

### DIMMING COMPATIBILITY:

Amerlux® Solace fixtures are compatible with all major dimming protocols prevalent in the United States. Please see below for general compatibilities and wiring diagrams. Amerlux recommends testing your unique dimming configuration as the exact full configuration (Dimmer, Fixture Quantity, Voltage, etc) may affect dimming performance.

**--- NOTE: INFORMATION BELOW IS FOR WIRED DIMMERS ONLY. FOR WIRELESS DIMMERS, CONSULT FACTORY ---**


### TRIAC (Forward Phase) DIMMING (Standard)

Utilizes "Standard" incandescent dimmers that are in wide use in installations across the US. Best for retrofit applications where TRIAC dimmers are installed.

#### Notes:

- 120VAC or 277VAC\*
- Dims down to less than 5% light output (most cases)
- Consult Dimming manufacturer for installation instructions - DO NOT SHARE NEUTRALS!
- Must meet dimmer Minimum Load Requirements per dimming manufacturer

TRIAC Wiring Diagram

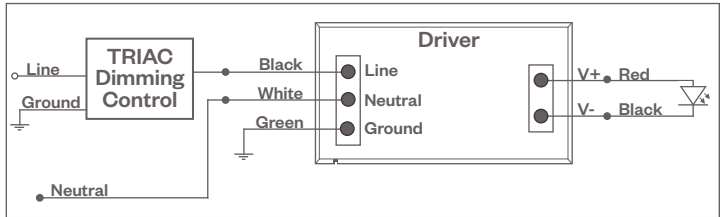

#### Compatible Dimmers†:

Wall Box (Incandescent Style, Wattage as required)		Central System
Lutron "Diva"	Lutron "Vareo"	Lutron "GP" Panel
Lutron "Nova-T"	Lutron "Skylark"	Lutron Grafik Eye QS
Lutron "Maestro"		


### ELV - Electronic Low Voltage (Reverse Phase) DIMMING (Standard)

Utilizes specialized "ELV" dimmers.

#### Notes:

- 120VAC or 277VAC\*
- Dims down to less than 5% light output (most cases)
- Consult Dimming manufacturer for installation instructions - DO NOT SHARE NEUTRALS!
- Must meet dimmer Minimum Load Requirements

ELV Wiring Diagram

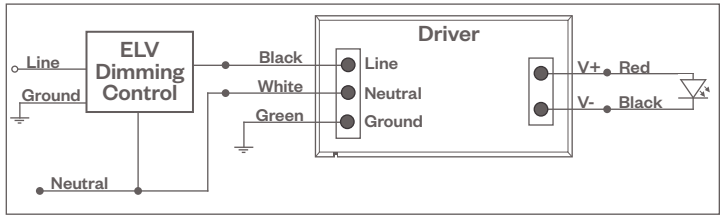

#### Compatible Dimmers†:

Wall Box (ELV Style)		Central System
Lutron "Diva"	Leviton "Surslide"	Lutron "GP" Panel with PHPM-PA Interface
Lutron "Nova-T"	Leviton "Vizio"	Lutron Grafik Eye QS with PHPM-PA Interface
Lutron "Maestro"		
Lutron "Vareo"		
Lutron "Skylark"		


### 0-10V - DIMMING (-0-10V Option)

Integrates into a variety of building management and daylighting controls

#### Notes:

- 120VAC or 277VAC\*
- Dims down to 1% light output
- Requires interface to turn off power to driver
- Consult Dimming manufacturer for installation instructions - DO NOT SHARE NEUTRALS!

0-10V Wiring Diagram

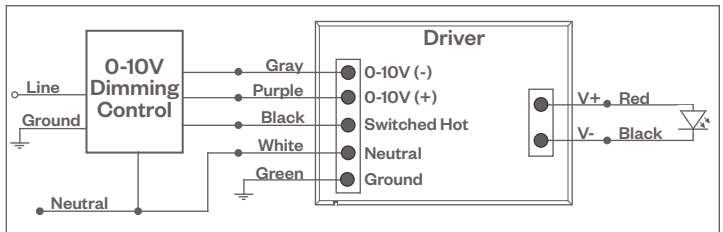

#### Compatible Dimmers†:

Wall Box	Central System
Lutron "Diva" - DVTV with PP-120H Interface	Leviton Renoir II 0-10V
	Lutron Grafik Eye with GRX-TVI Interface

#### Notes:

\* Driver is 277VAC dimmable with appropriate dimmer (by others). All provided wiring diagrams show 120VAC wiring colors and method. Please refer to 277VAC dimmer installation instructions for 277VAC wiring diagrams.

† The absence of a dimmer from the lists above does not imply incompatibility. Please consult factory for compatibility inquiries.

# Solace Round Lens Wall Wash

3" Shallow Round Lens Wall Wash



**PROJECT:**

**TYPE:**

**DIMMING COMPATIBILITY:**

Amerlux® Solace fixtures are compatible with all major dimming protocols prevalent in the United States. Please see below for general compatibilities and wiring diagrams. Amerlux recommends testing your unique dimming configuration as the exact full configuration (Dimmer, Fixture Quantity, Voltage, etc) may affect dimming performance.

**--- NOTE: INFORMATION BELOW IS FOR WIRED DIMMERS ONLY. FOR WIRELESS DIMMERS, CONSULT FACTORY ---**

**LUTRON H-SERIES / ECOSYSTEM (-HILUME-H-ECO Option)**

Integrates into Lutron EcoSystem building management

**Notes:**

- 120VAC or 277VAC\*
- Dims down to 1% light output
- EcoSystem Control
- Consult Dimming manufacturer for installation instructions - DO NOT SHARE NEUTRALS!

**Compatible Dimmers†:**

**Lutron ECO System**


Pow Pak Dimming Modules  
 Energi Savr Node  
 Grafik Eye QS/Homeworks  
 QS Control Unit  
 Quantum Hub  
 Homeworks QS/My Room

**Central System**

Lutron EcoSystem compatible controls

**HILUME-H-ECO, HILUME-P-ECO**

**EcoSystem Digital Control Wiring Diagram**

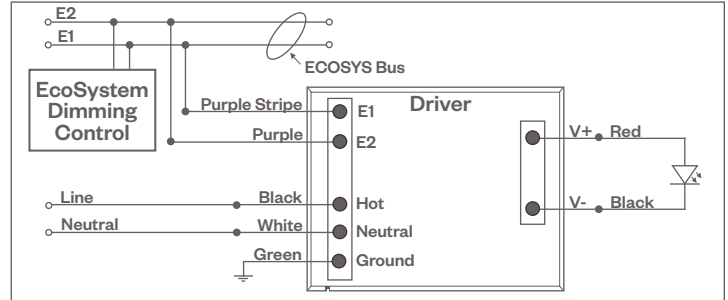

**Notes:**

- \* Driver is 277VAC dimmable with appropriate dimmer (by others). All provided wiring diagrams show 120VAC wiring colors and method. Please refer to 277VAC dimmer installation instructions for 277VAC wiring diagrams.
- † The absence of a dimmer from the lists above does not imply incompatibility. Please consult factory for compatibility inquiries.