


Linea® 3.5"

Linear Direct/Indirect LED

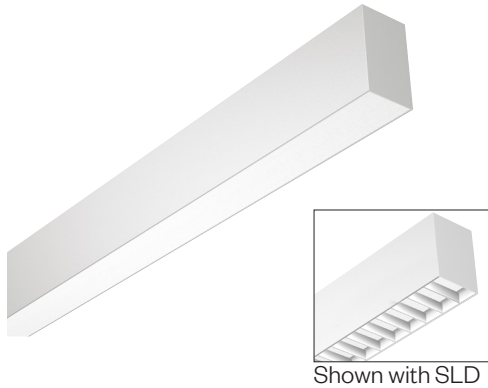

Features

The Linea® 3.5" Direct/Indirect LED ambient system is a small-scale 3.5" extruded profile that provides well-controlled ambient lighting with an uplight component. Engineered around the latest LED, in a choice of 5W/ft or 10W/ft LED boards. Excellent for commercial and retail ambient applications. Downlight component available with acrylic lens or parabolic louver options.

Product Overview

Type:	Direct/Indirect Lens, Louver Down/Batwing, Clear lens up	
Wattage:	5W/ft, 10W/ft (other wattages available see p2)	
Color Temp:	2700K, 3000K, 3500K, 4000K; Tunable White (2700K-5700K)	
CRI:	83 or 90+ typ. (2700K, 3000K, 3500K, 4000K) 90+ (Tunable White)	
Dimming (wired):	Static White	Tunable White
	0-10V, 1% dimming (standard)	0-10V TW, 1% dimming
	Lutron LDE1 Hi-lume® 1% Soft-On/Fade-to-Black	DALI DT8, 1% digital dimming
	DALI dimming, 1% dim	
Dimming (wireless):	Enlighted Sensor	Enlighted Sensor TW
	Lutron Athena (integral wireless RF node)	Lutron Athena TW (integral wireless RF node)

PROJECT:

TYPE:

Fixture Summary *(see following pages for more information)*

Performance Chart (4' Fixture)

Nominal Wattage/Foot	Delivered Lumens			LPW	Color Temp-CRI
	Direct	Indirect	Total		
5/5	2343	2644	4987	133.7	3500K-83
10/10	4401	4989	9390	126.9	3500K-83

Data is based on 3500K-83 IES files available on website

Data is based on 4' fixture with Performance Lens direct & Upper Clear lens indirect

Runs

Individual Runs: 2' - 8' (whole foot standard)

Continuous Runs: Available (whole foot standard)

Custom: Made to measure available (nearest 1/8" of field dimensions).

Requires approval drawings. Added cost & lead time.

Electrical Data

Wattage Per Foot		4'		8'	
		System Watts	Amps	System Watts	Amps
10	120V	37.3	0.31	74.6	0.62
	277V	37.3	0.14	74.6	0.27
20	120V	74	0.62	148	1.23
	277V	74	0.27	148	0.53

Electronic multi-volt (120-277VAC), constant current LED driver

Standard Patterns

"L"	"J"	"U"	"□"	"∩"	Wall to Ceiling	Custom*
Yes	Yes	Yes	Yes	Yes	No	Yes

**Submit drawing, consult factory*



Linea[®] 3.5" Direct/Indirect

Linear Direct/Indirect LED



PROJECT:

TYPE:

Ordering Information

LIN3.5DI-A16					120/277																																									
1	2	3	4	5	6	7	8	9	10	11	12																																			
1 <u>Model</u> LIN3.5DI-A16*						9 <u>Length</u>																																								
						<table border="1"> <tr> <td></td> <td style="text-align: center;">x</td> <td></td> <td style="text-align: center;">x</td> <td></td> </tr> <tr> <td></td> <td style="text-align: center;">(Length A)</td> <td></td> <td style="text-align: center;">(Length B)</td> <td></td> </tr> <tr> <td>Length A (used for)</td> <td></td> <td>Length B (used for)</td> <td></td> <td>Length C (used for)</td> </tr> <tr> <td>- all patterns</td> <td></td> <td>- all patterns</td> <td></td> <td>- PU</td> </tr> <tr> <td>- IND</td> <td></td> <td>- PR - 2 lengths</td> <td></td> <td>- PZ</td> </tr> <tr> <td>- CON</td> <td></td> <td style="text-align: center;">of 2</td> <td></td> <td></td> </tr> <tr> <td>- CUS</td> <td></td> <td></td> <td></td> <td></td> </tr> </table>				x		x			(Length A)		(Length B)		Length A (used for)		Length B (used for)		Length C (used for)	- all patterns		- all patterns		- PU	- IND		- PR - 2 lengths		- PZ	- CON		of 2			- CUS							
	x		x																																											
	(Length A)		(Length B)																																											
Length A (used for)		Length B (used for)		Length C (used for)																																										
- all patterns		- all patterns		- PU																																										
- IND		- PR - 2 lengths		- PZ																																										
- CON		of 2																																												
- CUS																																														
2 <u>Optics</u> (select 1 from each list) <u>Direct:</u> PL - performance lens (standard) DL - designer lens SLDW - straight blade louver, white aluminum, solid blades w/overlay SLDB - straight blade louver, black, solid blades w/overlay SLDS - straight blade louver, silver, solid blades w/overlay <u>Indirect:</u> UC - upper clear lens cover (standard) BAT - batwing uplight						10 <u>Configuration</u> IND ¹ - individual fixture, 2' to 8' in 1' increments CON - continuous run > than 8', specify to nearest foot CUS - custom made to measure, +/- 1/8" of customer supplied field dimensions <u>Standard Patterns (see page 6 for details):</u> PLL - L left, (2) straights + (1) 90° corner, leg right PLR - L right, (2) straights + (1) 90° corner, leg left PU - U shape, (3) straight lengths + (2) 90° corners PR - Rectangle, (4) straight lengths + (4) 90° corners PZ - Z shape, (3) straight lengths + (2) 90° corners For custom patterns, submit EDR on amerlux.com																																								
3 <u>Mounting</u> <u>Pendant Mount</u> (aircraft cable suspension) ASW10 - through ceiling tile or gyp board, white, 10' ASW20 - through ceiling tile or gyp board, white, 20' ASB10 - through ceiling tile or gyp board, black, 10' ASB20 - through ceiling tile or gyp board, black, 20' ASW10T - over ceiling tee, white, 10' ASW20T - over ceiling tee, white, 20' ASB10T - over ceiling tee, black, 10' ASB20T - over ceiling tee, black, 20' <u>Wall Mount</u> WM - wall mount						11 <u>Drivers/Controls</u> <u>Wired - Static White:</u> O-10V - 1% analogue dimming, 120-277VAC, Dim to off when selected with wireless dimming control HILUME-H-ECO - Lutron LDE1 Hi-lume® 1% Soft-On/Fade-to-Black DALI - DALI Dimming 120-277VAC, 1% dim <u>Wired - Tunable White:</u> O-10V TW - 1% dimming, multi-volt (120V-277V) constant current DALI DT8 - 1% digital dimming, CCT control per DALI DT8, (120V-277V) constant current <u>Wireless - Static White:</u> ENLS-SR - Enlighted sensor, energy metering ENLS-O10 - Enlighted sensor with controller unit AWN-R-WH-SR - Lutron Athena wireless node, RF only, white, D4i/DALI-2 AWN-R-BL-SR - Lutron Athena wireless node, RF only, black, D4i/DALI-2 AWN-R-WH-O10 - Lutron Athena wireless node, RF only, white, 0-10V AWN-R-BL-O10 - Lutron Athena wireless node, RF only, black, 0-10V AWN-S-OCC-WH-SR - Lutron Athena wireless node, Occupancy & Daylight sensor, white, D4i/DALI-2 AWN-S-OCC-BL-SR - Lutron Athena wireless node, Occupancy & Daylight sensor, black, D4i/DALI-2 <u>Wireless - Tunable White:</u> ENLS-SR-TW - Enlighted sensor, energy metering AWN-R-WH-SR-TW - Lutron Athena wireless node, RF only, white, D4i/DALI-2 AWN-R-BL-SR-TW - Lutron Athena wireless node, RF only, black, D4i/DALI-2 AWN-S-OCC-WH-SR-TW - Lutron Athena wireless node, Occupancy & Daylight sensor, white, D4i/DALI-2 AWN-S-OCC-BL-SR-TW - Lutron Athena wireless node, Occupancy & Daylight sensor, black, D4i/DALI-2																																								
4 <u>Circuiting</u> 1 - single circuit 2 - up/down switch separately						12 <u>Options/Accessories</u> EMC-PF ² - emergency circuit requires power feed located in last fixture section (for other locations consult factory) PF ² - Extra power feed for additional circuiting EMB* - emergency battery pack (not available for lengths under 4')																																								
5 <u>Wattage</u> (per foot, down/up) 5/5 10/10 5/10 10/5 <i>Consult factory for other wattage options</i> <i>Note: 3' units must use same wattage for D/I components</i>																																														
6 <u>Color Temp.-CRI</u> <u>Static White:</u> 27 - 2700K-83 279 - 2700K-90+ 30 - 3000K-83 309 - 3000K-90+ 35 - 3500K-83 359 - 3500K-90+ 40 - 4000K-83 409 - 4000K-90+						<u>Tunable White:</u> TW9-2757 - tunable white, 90 CRI (2700K-5700K)																																								
7 <u>Finish</u> HW - high reflectance matte white BT - black texture ST - silver texture <i>For other RAL color, consult factory</i>																																														
8 <u>Voltage</u> 120/277																																														

1 - Lengths less than 4' may have restrictions based upon wattage, lengths, drivers or other options.

2 - Not available with IND (individual) configuration.

* The "A" refers to the sequential revision in a year and "XX" refers to the year of update. Updates coincide with improved performance while not changing the overall fixture aesthetic and are reflected in the published performance data. Please contact your Amerlux representative for explanations of changes.

Linea[®] 3.5" Direct/Indirect

Linear Direct/Indirect LED



PROJECT:

TYPE:

Specifications

Application

Open office plan, conference rooms, corridors or any indoor retail space where an exciting combination of direct and indirect ambient lighting is desired.

Construction

One piece extruded aluminum housing. Die-cast End Plates match fixture body finish. Die-formed, cold-rolled steel internal components are protected against rust and corrosion.

Optical

Direct:

All Direct lenses are snap-in, extruded acrylic, with a maximum length of 8". Amerlux's proprietary acrylic lens provides excellent transmission while effectively concealing source image.

PL - Performance Lens provides high efficiency with controlled lens surface brightness (standard).

DL - Designer Lens provides flat even glow on lens. Best when lens is in direct or constant view.

Straight Blade Louver, aluminum, has 0.5" high blades, 0.81" on center.

SLDW - White Aluminum (light gray, appears white when lit)

SLDB - Black

SLDS - Silver

Indirect:

Extruded acrylic lens, with a maximum length of 8".

UC - Upper Clear lens cover (standard)

BAT - Batwing upright lens (optional) spreads light directly above fixture.

A minimum of 18" distance between ceiling plane and top of fixture is suggested.

LED

Amerlux's boards and patented connector design with brand name LEDs enables Amerlux fixtures to have excellent thermal management and offer a 5 year warranty. Our LED binning is within 3 MacAdam ellipse. Boards are configured for maximum flexibility resulting in even illumination no matter what the fixture layout. LED boards are easily replaced in the field with just a Phillips screw driver.

Static White	Tunable White
CCT: 2700K, 3000K, 3500K, 4000K	2700K-5700K
CRI: 83 or 90+ typical	90+ (92 typ)
R9: 16 @ CRI 83; >50 @ CRI 90+	>50
Life: 50,000+ hr., > 70% of initial lumens (L70)	

Electrical

Wiring: Individual and "Beginning of Run" (BOR) fixtures are prewired with power cord. All configurations have quick connect power harnesses for row connections.

1 - 1 Circuit, direct & indirect same circuit

2 - 2 Circuits, direct & indirect switch separately (power feed at both ends).

Standard Wattage: 5W/ft, 10W/ft.

Optional Wattages: 3W/ft, 4W/ft, 6W/ft, 7W/ft, 8W/ft, 9W/ft. (3W & 4W have a minimum length of 4'). For other wattages consult factory.

Emergency circuit via remote inverter or auxiliary emergency power supply (by others).

This product complies with IEEE C62.41 for surge endurance up to 2.5KV. Amerlux[®] recommends using additional surge protection with this unit (supplied by others), surge and over voltage damage is not covered under warranty.

EMC-PF - Emergency circuit requires power feed to be located in last fixture section for continuous runs. For other locations consult factory. Not available for individual (IND) configuration.

PF - Extra power feed for additional circuiting. Not available for individual (IND) configuration.

Finish

All painted surfaces are premium powder coated baked on for maximum durability and color stability.

HW - High reflective matte White

BT - Black Texture

ST - Silver Texture

For special paint colors supply RAL and/or actual paint chip for factory consultation.

Configurations/Lengths

IND - Individual fixtures are made of single standard lengths of 2 ft to 8 ft (in 1' increments). These are stand alone fixtures with matching End Caps, supplied with the mounting hardware. Lengths less than 4' may have restrictions based upon wattage, lengths, drivers or other options.

CON - Continuous runs, > 8' specified to nearest whole foot length in 1' increments. Runs made from standard lengths have End Caps at the beginning and end of run. Runs > 60' may require second power feed. Each Housing has factory installed alignment pins. Mating fixtures are easily aligned and joined with diagonally driven screws through a joining bracket. Wiring is made fast and positive with molded quick connectors.

CUS - Custom made to measure runs are made to nearest 1/8" of customer supplied field measurements or drawings. Custom lengths use the same hardware for hairline joining.

PXX - Standard Patterns consist of 90° corners with standard lengths (4' to 8' in 1' increments), continuous runs or made to measure lengths. Depending upon complexity of the pattern drawings may be required from the customer. If ordering please give overall lengths.

A'-B'-PLL - L Left - (1) 90° Corner 2 segments. Specify overall segments: A' & B'

A'-B'-PLR - L Right - (1) 90° Corner 2 segments. Specify overall segments: A' & B'

A'-B'-PR - Rectangle - (4) 90° Corners joining 4 segments. Specify overall segments: A' & B'

A'-B'-C'-PU - U shape - (2) 90° Corners joining 3 segments. Specify overall segments: A', B', & C'

A'-B'-C'-PZ - Z shape - (2) 90° Corners joining 3 segments. Specify overall segments: A', B', & C'

See page 6 for layouts.

PC - Custom Patterns may use standard lengths, Made To Measure, 90° or other corners (some limitations). Please provide drawing and consult factory.

Mounting

The Linea 3.5 Direct/Indirect is intended to be pendant or wall mounted in continuous rows. For indirect lighting Amerlux suggests 18" min from top of fixture to ceiling. Standard or custom patterns available.

LIN3.5DI-A16...ASW10 - Direct/Indirect pendant installed in center of ceiling tile or gypsum board ceiling (standard) i.e. ASW10. Or if canopy is installed on a grid Tee runner add, **T** i.e. ASW10T.

Cable Suspension: Cable is stranded stainless steel wire. All fittings are protected against rust and corrosion. Canopies are 5" x 1/4" die formed painted steel. Adjustment mechanism allows for infinite height adjustment. Amerlux recommends the required feed and non-feed suspensions based upon length and electrical options. Options include: color of canopy and power cord (black or white), length 10' or 20', and mounting condition, in center of ceiling tile and in gypsum board ceiling (standard) i.e. ASW10. Or if canopy is installed on a grid Tee runner add, **T** i.e. ASW10T

LIN3.5DI-A16...WM - Direct Indirect Wall Mounted using steel cleat bracket attached to fixture housing and wall bracket with set screws. Two bracket assemblies are used for each length under 8'. A third center bracket may be recommended. J box required at feed locations.

Please note: 1 Circuit is standard, the direct & indirect are on the same circuit. 2 Circuits, direct & indirect switched separately with power feeds at both ends.

Options

EMB - Emergency battery pack - 10W output power, 90 min of illumination time, up to 1300 lm of initial light output. Illuminated test-switch/charging indicator light is provided. Wattage consumption by EM: 2.5W/ft (4ft fixture), 1.66W/ft (6ft fixture), 1.25W/ft (8ft fixture). Request can be made to light up 4ft section on 8ft unit.

Certifications

Approved to UL standards for damp locations as tested by CSA Intended for indoor use only

Warranty

Amerlux's 5 year limited warranty. Please consult Amerlux website for details.

Linea[®] 3.5" Direct/Indirect


Linear Direct/Indirect LED




PROJECT:

TYPE:


LINEA 3.5" DIRECT/INDIRECT

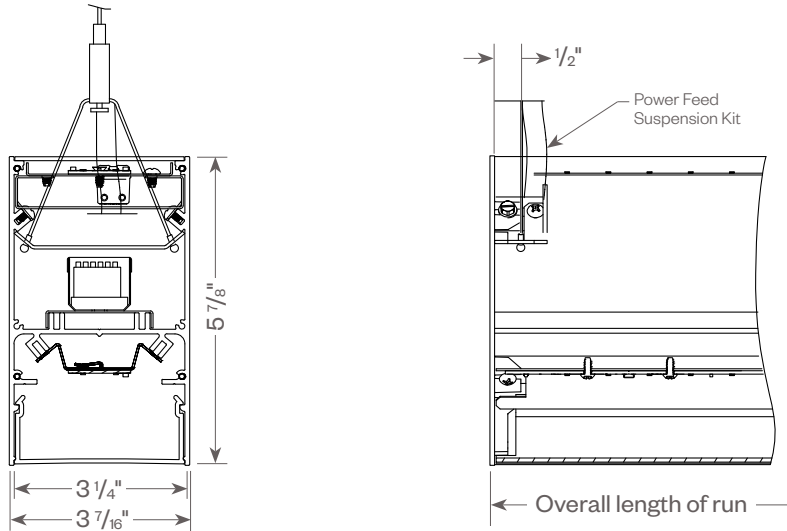

LINEA 3.5" DIRECT/INDIRECT WALL MOUNT

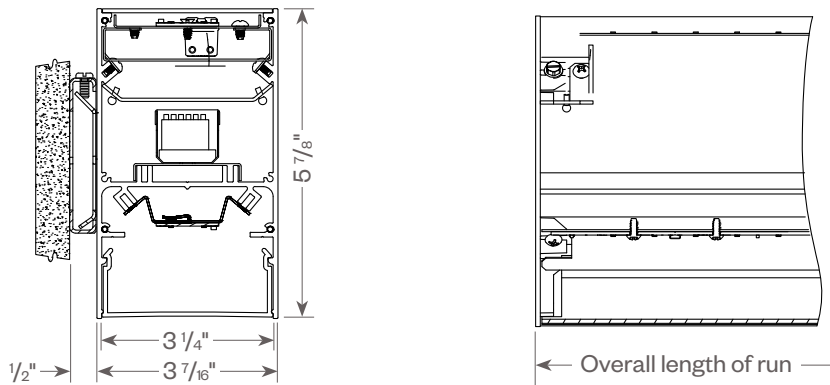


OPTIONAL LOUVER





JOINING THE HOUSINGS

Align & Join:

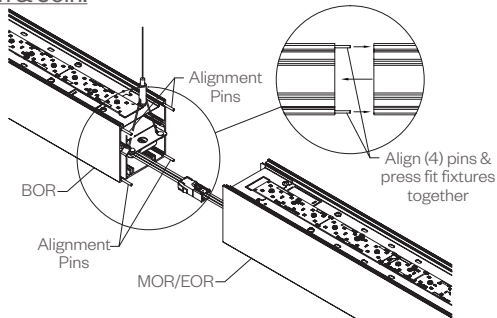

Secure Fixtures/Joint:

Bend up reflector cutout panels as shown to expose joining hardware

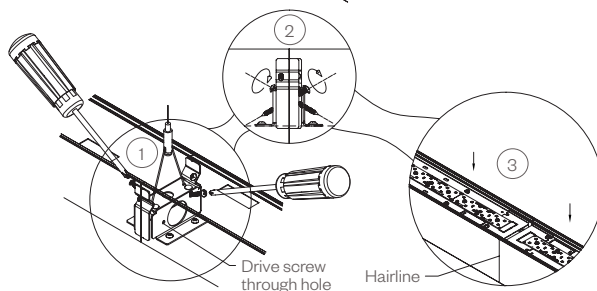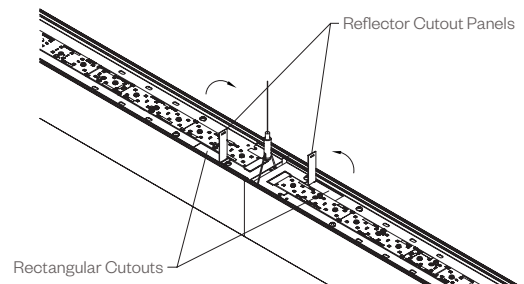

1. Through cutouts in reflectors, locate screws in joining brackets.
2. Drive screw diagonally into hole in opposite hanger bracket. Tighten both screws to pull together fixtures.
3. Rebend down reflector cutout panels.

Linea[®] 3.5" Direct/Indirect

Linear Direct/Indirect LED




Linea 3.5" Direct/Indirect

PROJECT:

TYPE:


CABLE KIT SUSPENSION OPTIONS:

CEILING OR GYPSUM BOARD (ASW10, ASW20, ASB10, ASB20)

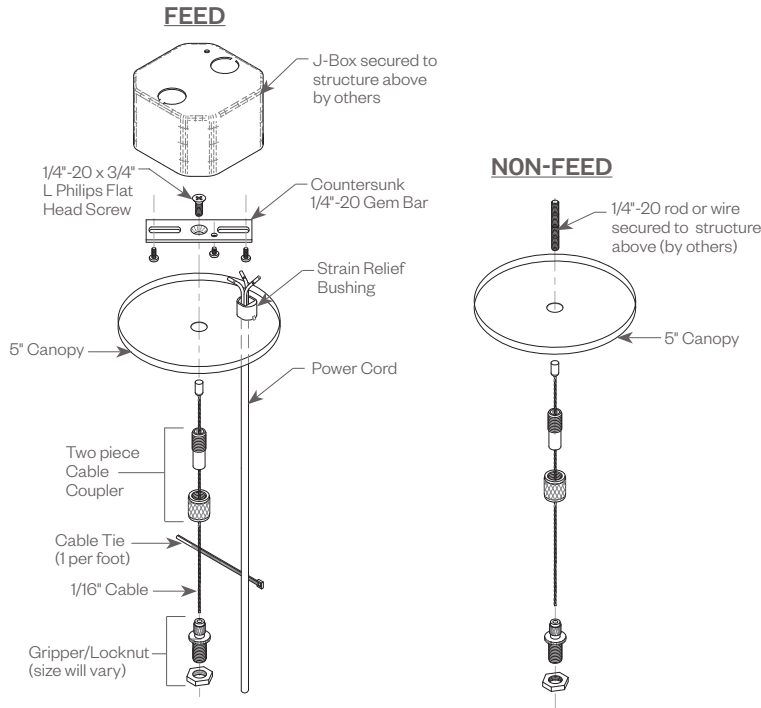

Cat#	Length	Cord/Canopy	Application
ASW10	10'	white/white	ceiling tile/gypsum
ASW20	20'	white/white	ceiling tile/gypsum
ASB10	10'	black/black	ceiling tile/gypsum
ASB20	20'	black/black	ceiling tile/gypsum
ASW10T	10'	white/white	ceiling tee
ASW20T	20'	white/white	ceiling tee
ASB10T	10'	black/black	ceiling tee
ASB20T	20'	black/black	ceiling tee

TEE GRID OR SCREW SLOT (ASW10T, ASW20T, ASB10T, ASB20T)

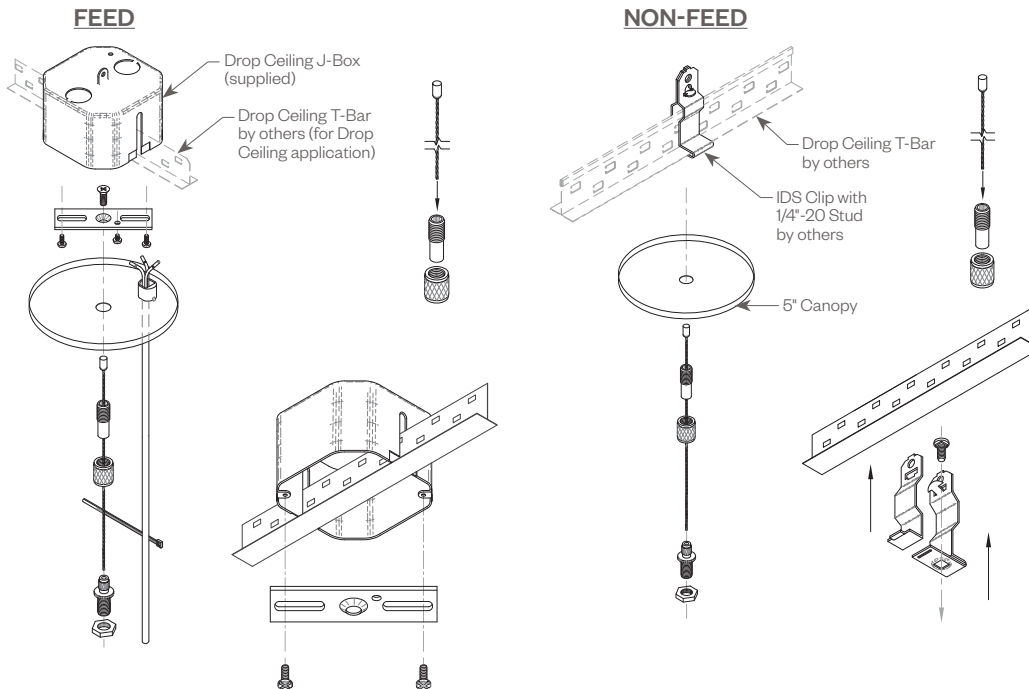

Linea[®] 3.5" Direct/Indirect

Linear Direct/Indirect LED



PROJECT:


TYPE:

OPTIONAL SENSOR/RF NODE:


Amerlux[®] has partnered with control companies to create building environments that are safer, and smarter, than ever before. At the heart of our partnership is intelligent RF nodes and Smart Sensor, the most advanced digital wireless communication and sensors available today. Integrated into Amerlux products.

Minimum run length is 3' for wireless sensor and RF node.

INDIVIDUAL (MIN 3' LENGTH)



RUNS




LINEA 3.5" PATTERNS:

Standard Patterns


- All corners are standard 90°, standard length legs.
- Use standard lengths: 4' min to 8' in 1 foot increments.
- Continuous runs must be the same length in pairs for closed configuration.

Custom Patterns


- Please provide drawings of your configuration.
- Made to Measure: +/- 1/8", consult factory.
- PC - custom pattern, please provide drawings and consult factory




Linea 3.5 SLD
Butt Joint-Straight
Blade Louver




Linea 3.5 Lens
Mitered Lens

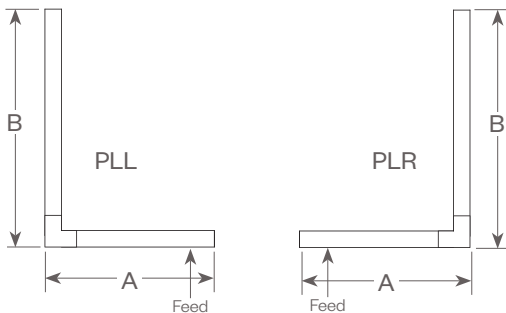


PLL - L Left, (2) straights + (1) 90° corner, leg right
PLR - L Right, (2) straights + (1) 90° corner, leg left
 Provide overall lengths: A' & B'
 Nomenclature: A-B-PLL A-B-PLR

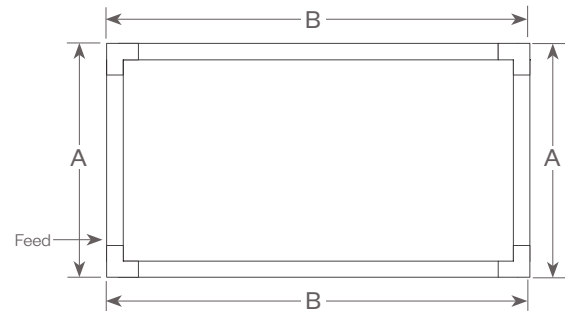

PR - Closed Rectangle, (4) straight lengths + (4) 90° corners
 Provide overall lengths: A' & B'
 Nomenclature: A-B-PR

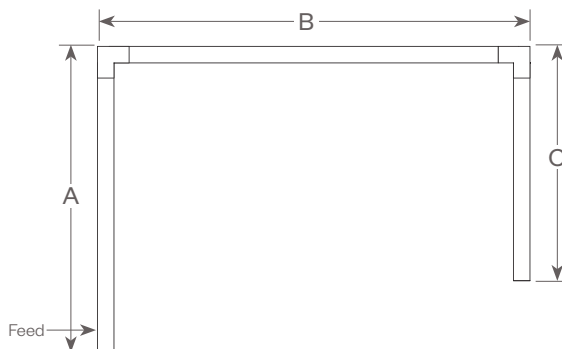

PU - Open U, (3) straight lengths + (2) 90° corners
 Provide overall lengths: A', B' & C'
 Nomenclature: A-B-C-PU

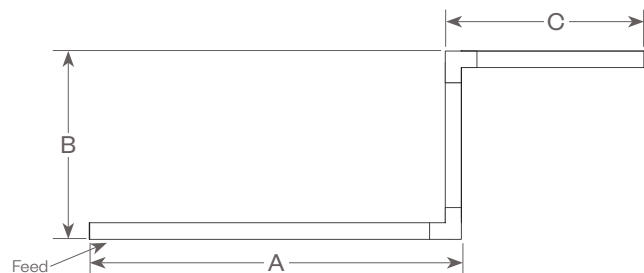

PZ - Open Z, (3) straight lengths + (2) 90° corners
 Provide overall lengths: A', B' & C'
 Nomenclature: A-B-C-PZ

Linea[®] 3.5" Direct/Indirect

Linear Direct/Indirect LED



PROJECT:

TYPE:

FIXTURE DATA:


MULTIPLYING FACTORS: (Multiplying Factor is based on 3500K-83 120V IES file on website)

Wattage:	3W	4W	5W	6W	7W	8W	9W	10W
Factor:	0.31	0.42	0.53	0.63	0.72	0.81	0.90	1.0

CCT Factors:					TW9
CRI	2700K	3000K	3500K	4000K	(@3500K)
83	0.92	0.97	1.0	1.02	-
90	0.81	0.84	0.86	0.89	0.86

**LINEA 3.5" DIRECT PERFORMANCE LENS
10W 3500K 4FT**

Total Watts: 38 Total Lumens: 4401
Source: 128 White LED's
LTL# 14664757.17



ZONAL LUMEN SUMMARY

Zone	Lumens	%Fixt
0-40	2174	49.4
0-60	3585	81.4
0-90	4401	100.0
90-180	0	0.0

Luminaire Efficacy = 115.1 lm/W

COEFFICIENTS OF UTILIZATION


Effective Floor Cavity Reflectance 20%

RC	80			
RW	70	50	30	10
RCR				
0	119	119	119	119
1	109	105	100	97
2	100	92	85	80
3	91	81	73	67
4	84	72	64	57
5	77	65	56	50
6	72	59	50	44
7	67	53	45	39
8	62	49	41	35
9	58	45	37	32
10	55	42	34	29

Note: Values are expressed as percent of total lumen output delivered to the task surface.

**LINEA 3.5" INDIRECT UPPER CLEAR LENS
10W 3500K 4FT**

Total Watts: 36 Total Lumens: 4989
Source: 120 White LED's
LTL# 14626239.20



ZONAL LUMEN SUMMARY

Zone	Lumens	%Fixt
0-40	0	0.0
0-60	0	0.0
0-90	0	0.0
90-180	4989	100.0

Luminaire Efficacy = 138.3 lm/W

COEFFICIENTS OF UTILIZATION


Effective Floor Cavity Reflectance 20%

RC	80			
RW	70	50	30	10
RCR				
0	95	95	95	95
1	87	83	79	76
2	79	72	66	62
3	72	63	57	51
4	65	56	48	43
5	60	49	42	36
6	55	44	36	31
7	50	39	32	27
8	47	35	28	23
9	43	32	25	20
10	40	29	22	18

Note: Values are expressed as percent of total lumen output delivered to the task surface.

**LINEA 3.5" INDIRECT BATWING
10W 3500K 4FT**

Total Watts: 36 Total Lumens: 4653
Source: 120 White LED's
LTL# 14626239.21A



ZONAL LUMEN SUMMARY

Zone	Lumens	%Fixt
0-40	0	0.0
0-60	0	0.0
0-90	0	0.0
90-180	4653	100.0

Luminaire Efficacy = 129.0 lm/w

COEFFICIENTS OF UTILIZATION

Effective Floor Cavity Reflectance 20%

RC	80			
RW	70	50	30	10
RCR				
0	95	95	95	95
1	87	83	79	76
2	79	72	66	62
3	72	63	57	51
4	65	56	48	43
5	60	49	42	36
6	55	44	36	31
7	50	39	32	27
8	47	35	28	23
9	43	32	25	20
10	40	29	22	18

Note: Values are expressed as percent of total lumen output delivered to the task surface.

Linea[®] 3.5" Direct/Indirect

Linear Direct/Indirect LED



PROJECT:

TYPE:

FIXTURE DATA:

MULTIPLYING FACTORS: (Multiplying Factor is based on 3500K-83 120V IES file on website)


Wattage:	3W	4W	5W	6W	7W	8W	9W	10W
Factor:	0.31	0.42	0.53	0.63	0.72	0.81	0.90	1.0

CCT Factors:					TW9
CRI	2700K	3000K	3500K	4000K	(@3500K)
83	0.92	0.97	1.0	1.02	-
90	0.81	0.84	0.86	0.89	0.86

Louver		
Finish:	SLV	BLK
Factor:	1.0	.65

**LINEA 3.5" DIRECT DESIGNER LENS
10W 3500K 4FT**

Total Watts: 38 Total Lumens: 3383
Source: 128 White LED's
LTL# 1466475718



ZONAL LUMEN SUMMARY

Zone	Lumens	%Fixt
0-40	1489	44.0
0-60	2630	77.7
0-90	3383	100.0
90-180	0	0.0

Luminaire Efficacy = 88.5 lm/W

COEFFICIENTS OF UTILIZATION


Effective Floor Cavity Reflectance 20%

RC	80			
RW	70	50	30	10
RCR				
0	119	119	119	119
1	108	104	99	95
2	98	90	83	77
3	90	79	71	64
4	82	70	61	54
5	75	62	53	46
6	70	56	47	40
7	64	51	42	36
8	60	46	38	32
9	56	43	34	29
10	53	39	31	26

Note: Values are expressed as percent of total lumen output delivered to the task surface.

**LINEA 3.5" DIRECT STRAIGHT BLADE LOUVER
10W 3500K 4FT**

Total Watts: 38 Total Lumens: 2038
Source: 128 White LED's
LTL# 1466475719



ZONAL LUMEN SUMMARY

Zone	Lumens	%Fixt
0-40	1188	58.3
0-60	1835	90.0
0-90	2038	100.0
90-180	0	0.0

Luminaire Efficacy = 53.3 lm/W

COEFFICIENTS OF UTILIZATION

Effective Floor Cavity Reflectance 20%

RC	80			
RW	70	50	30	10
RCR				
0	119	119	119	119
1	111	107	103	100
2	102	95	90	85
3	95	86	79	73
4	88	78	69	63
5	81	70	62	56
6	75	63	55	50
7	70	58	50	45
8	66	53	46	40
9	62	49	42	37
10	58	46	38	34

Note: Values are expressed as percent of total lumen output delivered to the task surface.

Linea[®] 3.5" Direct/Indirect

Linear Direct/Indirect LED



PROJECT:

TYPE:

STATIC WHITE - DIMMING COMPATIBILITY:

Amerlux[®] Linea fixtures are compatible with all major dimming protocols prevalent in the United States. Please see below for general compatibilities and wiring diagrams. Amerlux recommends testing your unique dimming configuration as the exact full configuration (Dimmer, Fixture Quantity, Voltage, etc) may affect dimming performance.

--- NOTE: INFORMATION BELOW IS FOR WIRED DIMMERS ONLY. FOR WIRELESS DIMMERS, CONSULT FACTORY ---


0-10V - DIMMING (Standard)

Integrates into a variety of building management and daylighting controls

Notes:

- 120V or 277V*
- Dims down to 1% light output
- Requires interface to turn off power to driver
- Consult Dimming manufacturer for installation instructions - DO NOT SHARE NEUTRALS!

0-10V Wiring Diagram

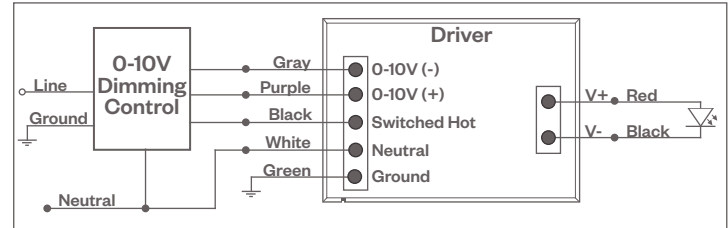

Compatible Dimmers*:

Wall Box

Lutron: Diva - DVSTV Maestro - MS-Z101 Nova-T - NTSTV-DV	Wattstopper: ADF-120277	Leviton: Renoir II
--	-----------------------------------	------------------------------

Center System

Lutron Grafikx Eye with GRX-TV1 Interface


LUTRON LDE1 DIMMING

Integrates into Lutron EcoSystem building management

Notes:

- 120VAC or 277VAC*
- Dims down to 1% Soft-On/Fade-to-Black
- EcoSystem Control
- Consult Dimming manufacturer for installation instructions - DO NOT SHARE NEUTRALS!

Lutron LDE1 (HILUME-H-ECO) EcoSystem Digital Control Wiring Diagram

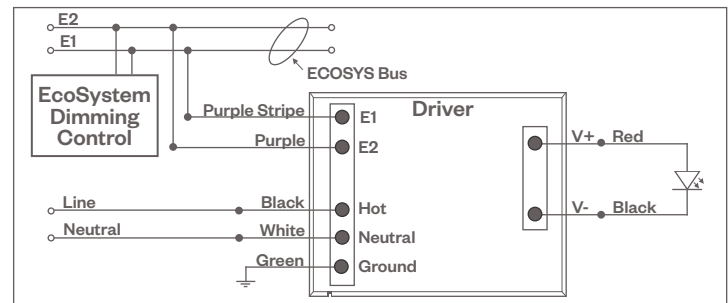

Compatible Dimmers*:

Lutron ECO System

Pow Pak Dimming Modules Energi Savr Node Grafik Eye QS/Homeworks QS Control Unit Quantum Hub Homeworks QS/My Room
--

Central System

Lutron EcoSystem compatible controls

Notes:

* Driver is 277VAC dimmable with appropriate dimmer (by others). All provided wiring diagrams show 120VAC wiring colors and method. Please refer to 277VAC dimmer installation instructions for 277VAC wiring diagrams.

† The absence of a dimmer from the lists above does not imply incompatibility. Please consult factory for compatibility inquiries.

Linea[®] 3.5" Direct/Indirect

Linear Direct/Indirect LED



PROJECT:

TYPE:

STATIC WHITE - DIMMING COMPATIBILITY:

Amerlux[®] Linea fixtures are compatible with all major dimming protocols prevalent in the United States. Please see below for general compatibilities and wiring diagrams. Amerlux recommends testing your unique dimming configuration as the exact full configuration (Dimmer, Fixture Quantity, Voltage, etc) may affect dimming performance.

--- NOTE: INFORMATION BELOW IS FOR WIRED DIMMERS ONLY. FOR WIRELESS DIMMERS, CONSULT FACTORY ---

DALI - DALI DIMMING 120V-277V

Digital control protocol allows individual fixture control

Notes:

- 120VAC - 277VAC*
- Dims down to 1% light output in most cases

Compatible Dimmers†:


Wall Box

Leviton CD250 Controller

Center System


Dynalite
Fifth Light

DALI Wiring Diagram

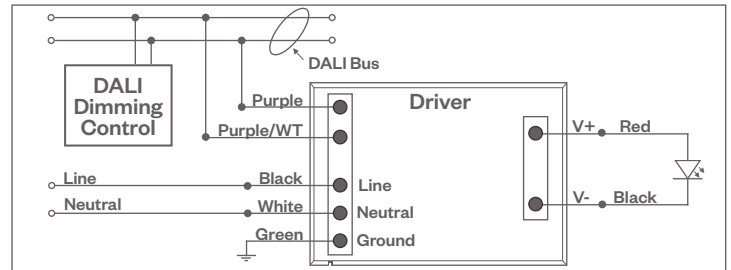

EMERGENCY FIXTURE WITH BUILT-IN BATTERY PACK (EMB) WIRING:

Note: EMB not available on lengths under 4'.

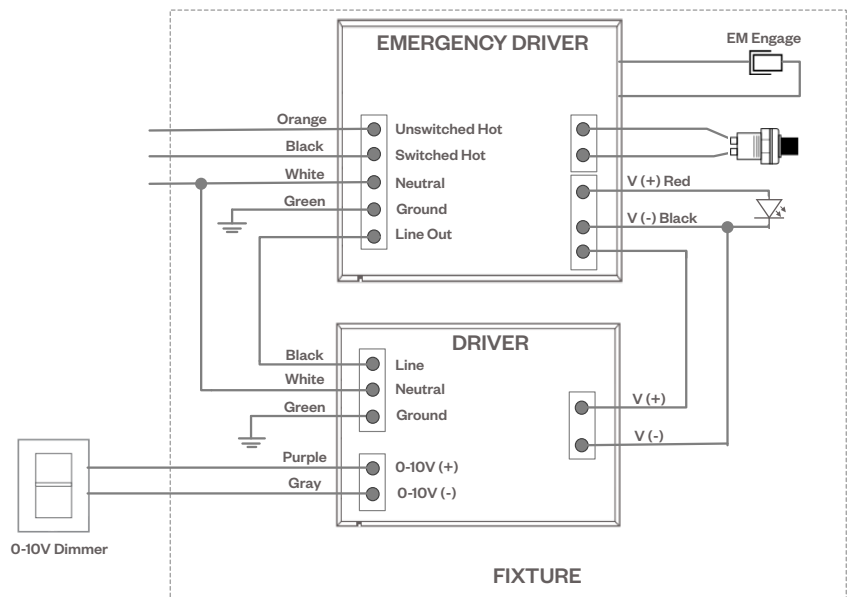

Notes:

* Driver is 277VAC dimmable with appropriate dimmer (by others). All provided wiring diagrams show 120VAC wiring colors and method. Please refer to 277VAC dimmer installation instructions for 277VAC wiring diagrams.

† The absence of a dimmer from the lists above does not imply incompatibility. Please consult factory for compatibility inquiries.

Linea[®] 3.5" Direct/Indirect


Linear Direct/Indirect LED



PROJECT:

TYPE:

TUNABLE WHITE

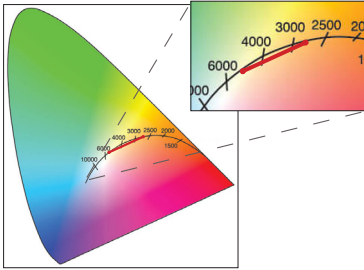


Tunable White range from 2700K-5700K, 90 CRI.
See wiring diagrams below.

TUNABLE WHITE - DIMMING COMPATIBILITY:


Amerlux[®] Linea fixtures are compatible with all major dimming protocols prevalent in the United States. Please see below for general compatibilities and wiring diagrams. Amerlux recommends testing your unique dimming configuration as the exact full configuration (Dimmer, Fixture Quantity, Voltage, etc) may affect dimming performance.

--- NOTE: INFORMATION BELOW IS FOR WIRED DIMMERS ONLY. FOR WIRELESS DIMMERS, CONSULT FACTORY ---


0-10V Wiring Diagram (Single Circuit)

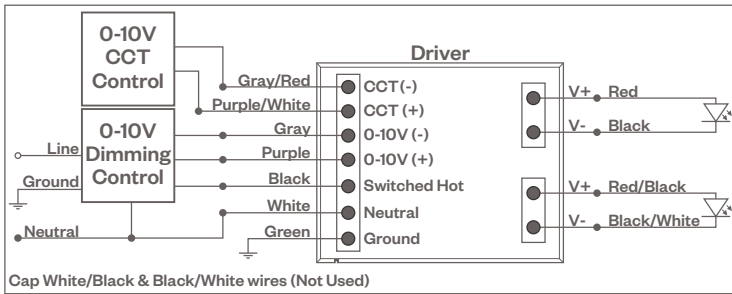

0-10V Wiring Diagram (Dual Switch, Single Controls)

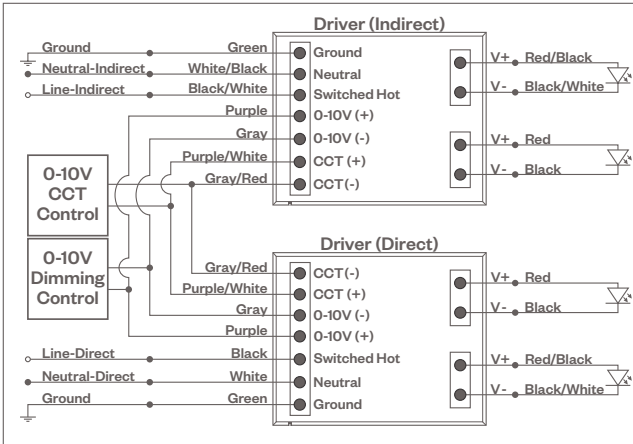

0-10V Wiring Diagram (Dual Circuit)

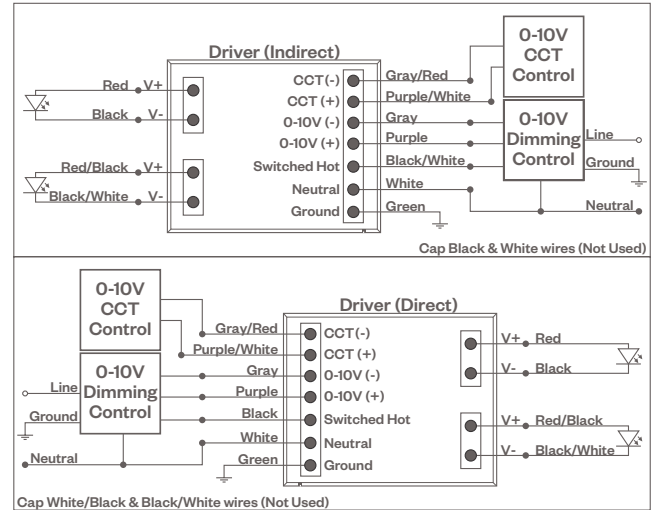

Notes:

* Driver is 277VAC dimmable with appropriate dimmer (by others). All provided wiring diagrams show 120VAC wiring colors and method. Please refer to 277VAC dimmer installation instructions for 277VAC wiring diagrams.

† The absence of a dimmer from the lists above does not imply incompatibility. Please consult factory for compatibility inquiries.

Linea® 3.5" Direct/Indirect

Linear Direct/Indirect LED



PROJECT:


TYPE:

TUNABLE WHITE - DIMMING COMPATIBILITY:

Amerlux® Linea fixtures are compatible with all major dimming protocols prevalent in the United States. Please see below for general compatibilities and wiring diagrams. Amerlux recommends testing your unique dimming configuration as the exact full configuration (Dimmer, Fixture Quantity, Voltage, etc) may affect dimming performance.

--- NOTE: INFORMATION BELOW IS FOR WIRED DIMMERS ONLY. FOR WIRELESS DIMMERS, CONSULT FACTORY ---

DALI DT8 Wiring Diagram

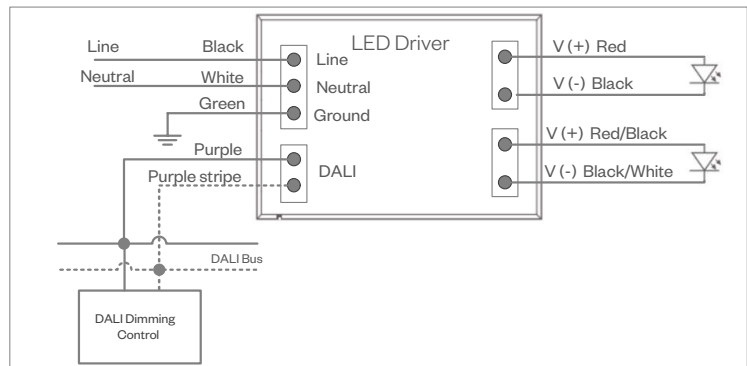

Notes:

* Driver is 277VAC dimmable with appropriate dimmer (by others). All provided wiring diagrams show 120VAC wiring colors and method. Please refer to 277VAC dimmer installation instructions for 277VAC wiring diagrams.

† The absence of a dimmer from the lists above does not imply incompatibility. Please consult factory for compatibility inquiries.