


WARNING - RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY. FIXTURE IS INTENDED FOR INSTALLATION IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE, LOCAL AND FEDERAL SPECIFICATIONS. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.

RETAIN THESE INSTRUCTIONS FOR MAINTENANCE REFERENCE.

- 1** ATTACH CROSSBAR ASSEMBLY TO 4" OCTAGONAL JUNCTION BOX (B.O.) WITH MOUNTING HARDWARE (B.O.)
- 2** INSERT O-RING INTO GROOVE ON TOP OF FIXTURE STEM
- 3** SPLICE FIXTURE WIRES TO INCOMING WIRES, THEN FEED CONNECTIONS UP THROUGH NIPPLE AND INTO JUNCTION BOX OR DOWN INTO FIXTURE STEM
- 4** RAISE CANOPY TO CROSSBAR ASSEMBLY, ALLOWING CROSSBAR NIPPLE TO PASS THROUGH CANOPY
- 5** FULLY THREAD FIXTURE STEM ONTO CROSSBAR NIPPLE

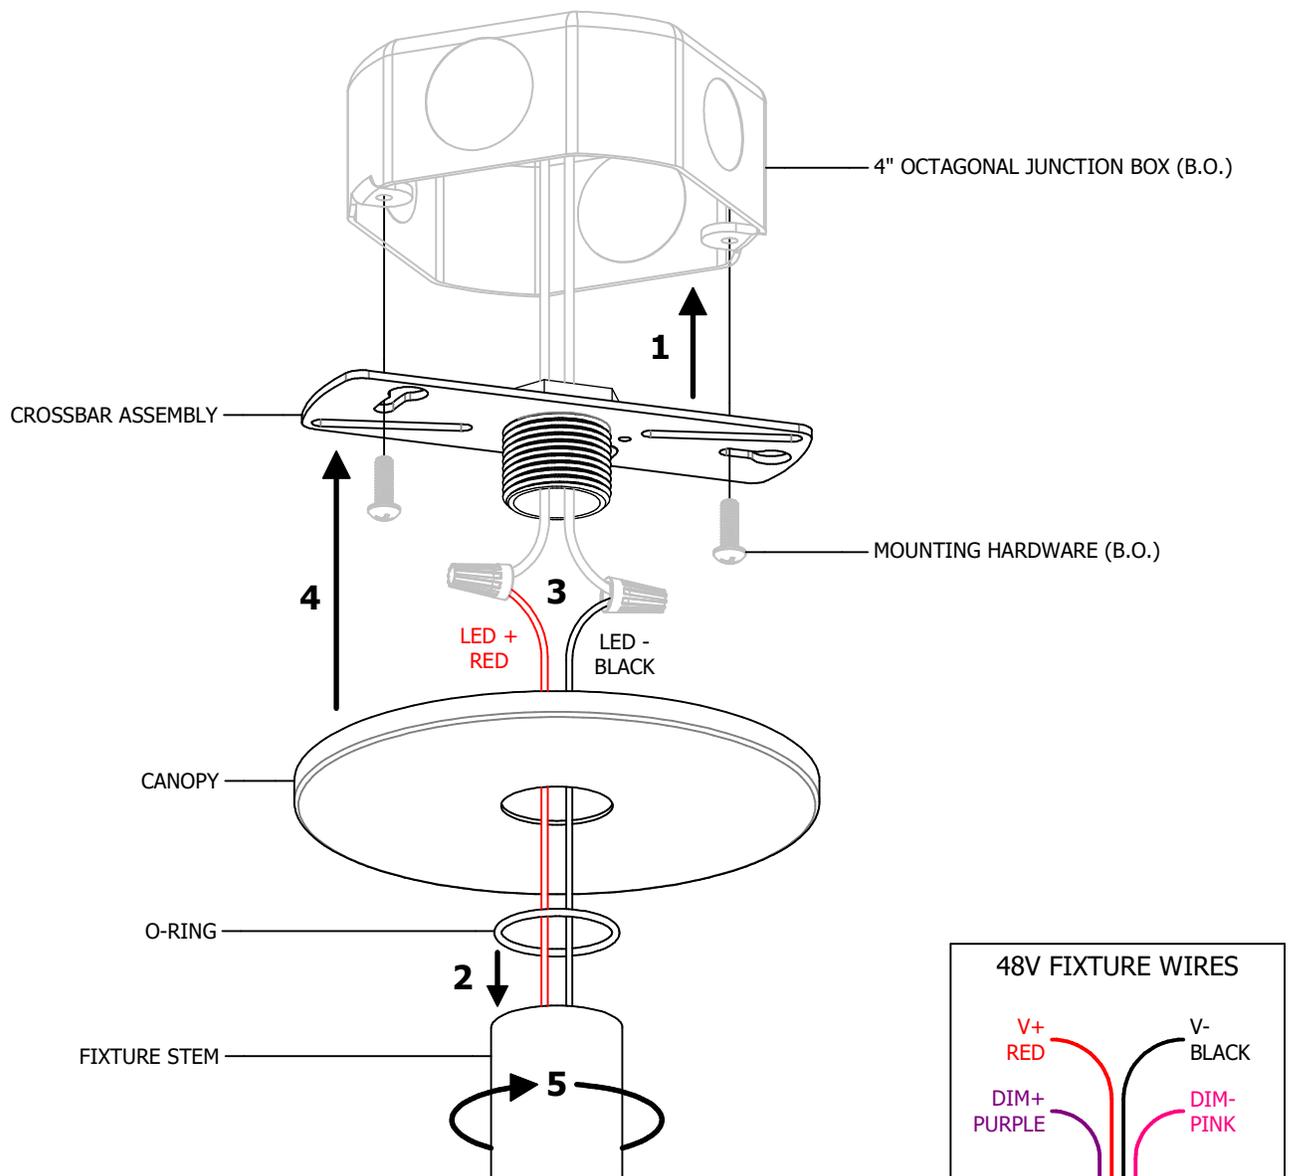

Amerlux, 178 Bauer Drive, Oakland, N.J. 07436, T: 973-882-5010, F: 973-882-2604 www.amerlux.com