

# Pari XS


Extra Small  
Track Head

## Features

Flexible modular design in a sleek and compact cylinder appearance with interchangeable TIR optics (15°, 24°, 38°, 60°) and comfort bezel.

## Product Overview

Type: Track Accent & Display  
Wattage: 10W  
Output: see performance chart below  
Color Temp: 2700K, 3000K, 3500K  
CRI: 90+ typ.  
Dimming: TRIAC & ELV (120VAC) - 5% Dim



Fixture with white finish

PROJECT:

TYPE:

## Fixture Summary *(see following pages for more information)*

### Performance Chart

Beam Spread	Delivered Lumens	LPW	CBCP	CCT	CRI
15°	848	85.6	5079	3000K	90+
24°	809	80.9	3329	3000K	90+
38°	867	87.7	2262	3000K	90+
60°	757	76.8	931	3000K	90+

*Data is based on 3000K, 90+ 120V IES files available on website.*

### Electrical Data

	10W	
	System Watts	Amps
120V	10	0.08

*Electronic constant current LED driver*

# Pari XS

Extra Small Track Head



PROJECT:

TYPE:

## Ordering Information

<b>PARI-XS</b>	.	.	.	<b>120</b>	.	.	.	<b>LE/TE</b>
<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>	<b>5</b>	<b>6</b>	<b>7</b>		

**1** Model  
**PARI-XS** - extra small track head, 10W

**2** Finish  
**W** - white  
**B** - black

**3** Mounting Adapter  
(adapter finish will match housing & stem finish)  
**TN1** - H-style, single circuit, 120V (not compatible with the GES70 Monopoint Kit)  
**CT** - J-style, single & dual circuit, 120V  
**LOL** - L-style, single circuit, 120V

**4** Voltage  
**120**

**5** Beam Spread  
**15** - 15°  
**24** - 24°  
**38** - 38°  
**60** - 60°

**6** Color Temp and CRI  
**279** - 2700K, 90+ CRI  
**309** - 3000K, 90+ CRI  
**359** - 3500K, 90+ CRI

**7** Drivers  
**LE/TE** - TRIAC/ELV dimming, 5% dim

# Pari XS

Extra Small Track Head



## PROJECT:

## TYPE:

### Specifications

#### Application

Accent and display lighting for retail, supermarket, commercial & hospitality environments.

#### Construction

Die-cast and extruded aluminum construction  
Molded polycarbonate comfort bezel, matte black finish  
No exposed wiring  
Powder coat paint

#### Optical

TIR optics  
Beam Spreads: 15°, 24°, 38°, 60°

#### LED

Color Temp: 2700K, 3000K, 3500K  
CRI: 90+ typ.  
Binning: 3-step MacAdam ellipse  
Lumen Maintenance: >70% of initial lumens @ 50,000 hrs  
Lumen Output (3000K, 90+): up to 867 lm

#### Electrical

Wattage: 10W  
Electronic constant current LED driver, 120V input

#### Driver

LE/TE - Leading Edge (Triac, Forward Phase) or Trailing Edge (ELV, Reverse Phase) autosensing driver dims down to 5% on most dimming systems.

See dimming pages for more information.

#### Finish

Powder coat paint, White or Black  
Comfort bezel is matte black

#### Mounting

Track mounting.  
Available adapters include H-Style, J-Style & L-Style


**Note: Track fixture mounting recommended only to horizontal mounted track.**

#### Certifications

ETL listed  
Intended for indoor use only.

#### Warranty

5 year limited warranty

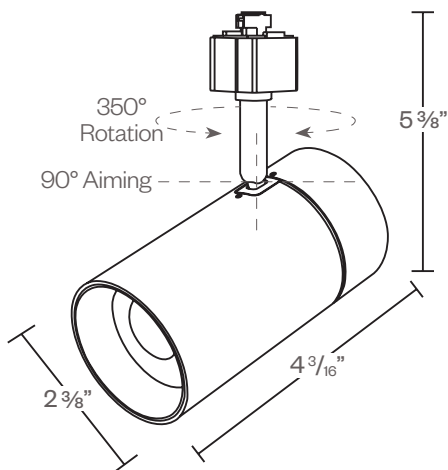

# Pari XS

Extra Small Track Head



## PROJECT:

## TYPE:





### FIXTURE DATA:

#### MULTIPLYING FACTORS:

CCT:	2700K, 90+	3000K, 90+	3500K, 90+
Factor:	0.934	1.0	1.06

Multiplying Factor is based on 3000K, 90+ 120V IES file on website.

### 10W LED, 3000K, 90+

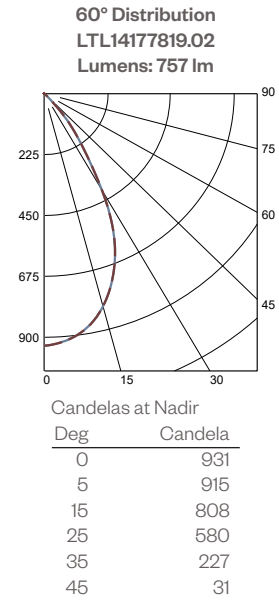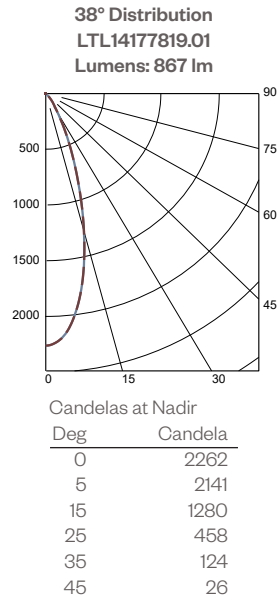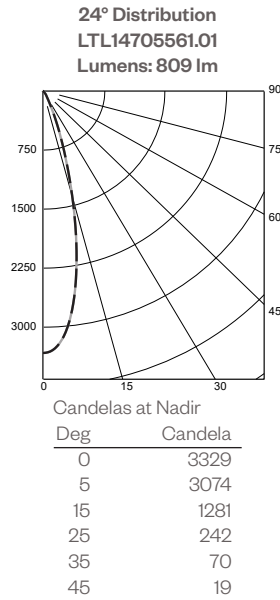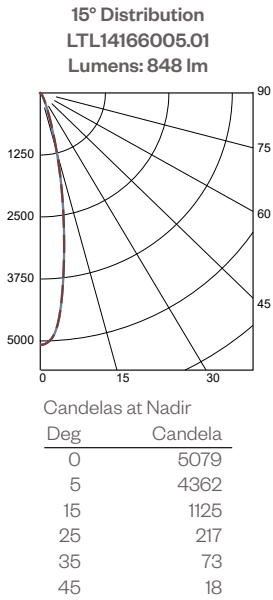

### APPLICATION DATA:

#### Notes and Definitions:

Beam spread is to 50% center beam candlepower (CBCP).


D=Distance to floor or wall.

FC=Footcandles on floor or wall at center beam aiming location.

L=Effective Visual Beam length in feet (50% of maximum footcandle level).

W=Effective Visual Beam width in feet (50% of maximum footcandle level).

CB=Distance across or down to center beam location.

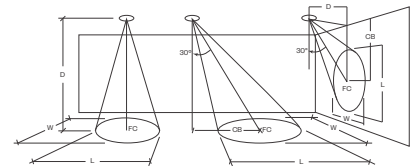

Distribution	0° Aiming Angle Horizontal Footcandles				30° Aiming Angle Horizontal Footcandles					30° Aiming Angle Vertical Footcandles					60° Aiming Angle Vertical Footcandles				
	D	FC	L	W	D	FC	L	W	CB	D	FC	L	W	CB	D	FC	L	W	CB
15° Distribution	5.0'	204	1.6	1.6	5.0'	131	2.3	1.9	3.0	3.0'	88	3.2	1.7	4.0	3.0'	305	1.8	1.2	2.0
	7.5'	91	2.6	2.6	7.5'	62	3.3	2.9	4.0	4.0'	51	4.1	2.5	6.0	4.0'	215	1.8	1.4	2.0
	10.0'	51	3.5	3.5	10.0'	34	4.4	3.8	5.0	5.0'	33	5.1	3.0	7.0	5.0'	128	2.3	1.9	3.0
	12.5'	33	4.2	4.2	12.5'	22	5.5	4.9	7.0	6.0'	23	6.4	3.6	9.0	6.0'	96	2.7	2.3	3.0
24° Distribution	5.0'	133	2.3	2.3	5.0'	86	2.9	2.7	3.0	3.0'	68	3.3	2.2	4.0	3.0'	206	2.1	1.6	2.0
	7.5'	59	3.3	3.3	7.5'	41	4.1	3.7	4.0	4.0'	39	4.4	3.0	5.0	4.0'	145	2.2	1.9	2.0
	10.0'	33	4.5	4.5	10.0'	23	5.5	4.9	5.0	5.0'	24	5.5	3.6	6.0	5.0'	84	3.0	2.7	3.0
	12.5'	21	5.5	5.5	12.5'	15	6.9	6.2	6.0	6.0'	17	6.7	4.4	8.0	6.0'	64	3.3	3.0	3.0
38° Distribution	5.0'	91	2.8	2.8	5.0'	61	3.5	3.1	2.0	3.0'	51	3.7	2.7	3.0	3.0'	156	2.3	1.7	1.0
	7.5'	40	4.1	4.1	7.5'	28	5.1	4.6	4.0	4.0'	29	4.9	3.5	5.0	4.0'	99	2.8	2.6	2.0
	10.0'	23	5.5	5.5	10.0'	16	6.7	6.1	5.0	5.0'	19	6.0	4.2	6.0	5.0'	62	3.5	3.0	2.0
	12.5'	15	6.9	6.9	12.5'	10	8.4	7.6	6.0	6.0'	13	7.4	5.1	7.0	6.0'	44	4.0	3.7	3.0
60° Distribution	5.0'	37	4.5	4.5	5.0'	29	4.5	4.7	2.0	3.0'	35	3.2	3.3	2.0	3.0'	83	2.7	2.8	1.0
	7.5'	17	6.7	6.7	7.5'	13	6.8	7.0	2.0	4.0'	21	4.1	4.3	3.0	4.0'	46	3.6	3.7	1.0
	10.0'	9	9.0	9.0	10.0'	8	9.0	9.3	3.0	5.0'	13	5.3	5.4	4.0	5.0'	29	4.5	4.7	2.0
	12.5'	6	11.2	11.2	12.5'	5	11.6	11.9	4.0	6.0'	9	6.4	6.6	5.0	6.0'	21	5.3	5.5	2.0

# Pari XS

Extra Small Track Head



## PROJECT:

## TYPE:

### DIMMING COMPATIBILITY:

Amerlux® Pari fixtures are compatible with ELV and TRIAC dimming. Please see below for general compatibilities and wiring diagrams. Amerlux recommends testing your unique dimming configuration as the exact full configuration (Dimmer, Fixture Quantity, Voltage, etc) may affect dimming performance.

**--- NOTE: INFORMATION BELOW IS FOR WIRED DIMMERS ONLY. FOR WIRELESS DIMMERS, CONSULT FACTORY ---**


### TRIAC (Forward Phase) DIMMING (Standard)

Utilizes "Standard" incandescent dimmers that are in wide use in installations across the US. Best for retrofit applications where TRIAC dimmers are installed.

#### Notes:

- 120VAC
- Dims down to 5% light output (most cases)
- Consult Dimming manufacturer for installation instructions - DO NOT SHARE NEUTRALS!
- Must meet dimmer Minimum Load Requirements per dimming manufacturer

TRIAC Wiring Diagram

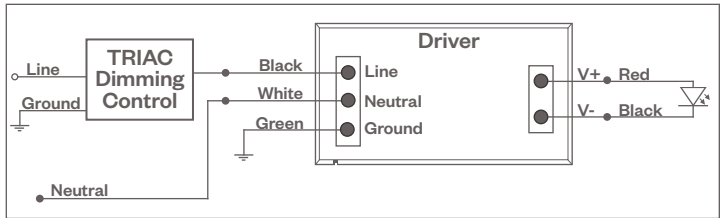

#### Compatible Dimmers†:

##### Wall Box (Incandescent Style, Wattage as required)

Lutron "Diva"  
Lutron "Nova-T"  
Lutron "Maestro"  
Lutron "Skylark"

##### Central System

Lutron "GP" Panel  
Lutron Grafik Eye QS


### ELV - Electronic Low Voltage (Reverse Phase) DIMMING (Standard)

Utilizes specialized "ELV" dimmers.

#### Notes:

- 120VAC
- Dims down to 5% light output (most cases)
- Consult Dimming manufacturer for installation instructions - DO NOT SHARE NEUTRALS!
- Must meet dimmer Minimum Load Requirements

ELV Wiring Diagram

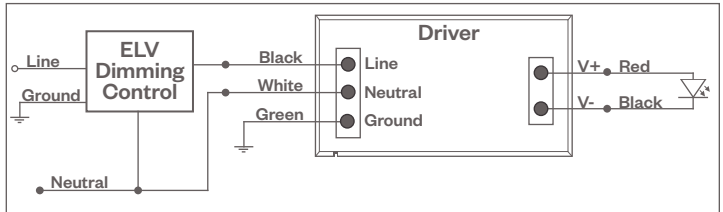

#### Compatible Dimmers†:

##### Wall Box (ELV Style)

Lutron "Diva"	Leviton "Surslide"
Lutron "Nova-T"	Leviton "Vizio"
Lutron "Maestro"	
Lutron "Skylark"	

##### Central System

Lutron "GP" Panel with PHPM-PA Interface  
Lutron Grafik Eye QS with PHPM-PA Interface