

D730 Series

LED Luminaire



PROJECT:

TYPE:

Features

Lighting for exterior retail, commercial and hospitality environments. The D730 Series consists of an efficient Type III (T3) or Type V (T5) refractive lens combined with one of several styles of cast aluminum fitters. The spun aluminum hood minimizes light in the upper hemisphere. Powered by the Amerlux patented AVISTA® LED system with options for intensity, distribution and color.

Product Overview

Wattage:	up to 86W
Lumen Output :	up to 10,943 lm; up to 143 lm/W
Color Temp:	2700K, 3000K, 4000K 1900K (<i>Nightscape</i>)
Dimming:	0-10V dimming Manual onboard dimming option available



D73x

Certifications



Fixture Summary

Installation:

The luminaire will mount to a 3" OD post or tenon with 5/16" black oxide coated stainless steel set screws to ensure a solid connection. The diffuser will be held to the fitter by (4) 5/16"-18 black oxide coated stainless steel set screws.

Electrical:

- Over voltage and short circuit protected driver
- Series connected 10kV/20kA surge protector
- Automatic AC incoming voltage sensing (120V-277V)
- 347V/480V option consult factory
- 0-10V dimming
- Optional Socket only version available, consult factory

Diffuser Choices:

- Acrylic Type III
- Acrylic Type V

Distribution:

- Symmetric

CCT, CRI:

- 2700K, 80CRI
- 3000K, 70CRI
- 4000K, 70CRI
- 1900K, 52CRI (*Nightscape*, see pg 4)

Power Level:

(see performance chart for output)

- 30W
- 44W
- 60W
- 86W

L70:

72,000+ hrs.

Finish:

Durable thermoset polyester powdercoat finish in the following:

- Satin Black
- Classic Bronze
- Gloss Textured Bronze
- Green
- Gloss Textured Black
- Textured Black
- Gloss Textured Green

Accessories:

- Dusk-to-dawn button type photocell
- Controls Capable Harness
- Optional onboard field selectable output switch for dimming
- Wireless control option

ETL listed, suitable for wet locations.

D730 Series

LED Luminaire



PROJECT:


TYPE:

Ordering Information


AVI-G3-SY						
1	2	3	4	5	6	7
1 Model	2 Diffuser Material - Distribution	3 LED System	4 CCT	5 Power Level	6 Finish	7 Accessories
D731	AC-T3 acrylic, type III	AVI-G3-SY Avista light engine with symmetrical distribution	27 2700K	P1 (30W)	BLK satin black	PCL dusk-to-dawn button type photocell (not available for use with CCH)
D734	AC-T5 acrylic, type V		30 3000K	P2 (44W)	CLB classic bronze	CCH controls capable harness (not available for use with PCL or FSO)
D735			40 4000K	P3 (60W)	GBZ gloss textured bronze	FSO field selectable output option to allow manual dimming (not available for use with CCH)
D736			NS 1900K (Nightscape, see pg 4 for details)	P4 (86W)	GRN green	Consult factory for SmartSite integrated wireless control option (SSINT-1)
				120V-277V auto-sensing driver is standard. Consult factory for 347V/480V option.	GTB gloss textured black	
					TBK textured black	
					TGR gloss textured green	
					CSTM custom	

Please Note: Fixture is available with optional Medium base (MDO) or Mogul base (MGO) socket only. Consult factory for details.

Product Details

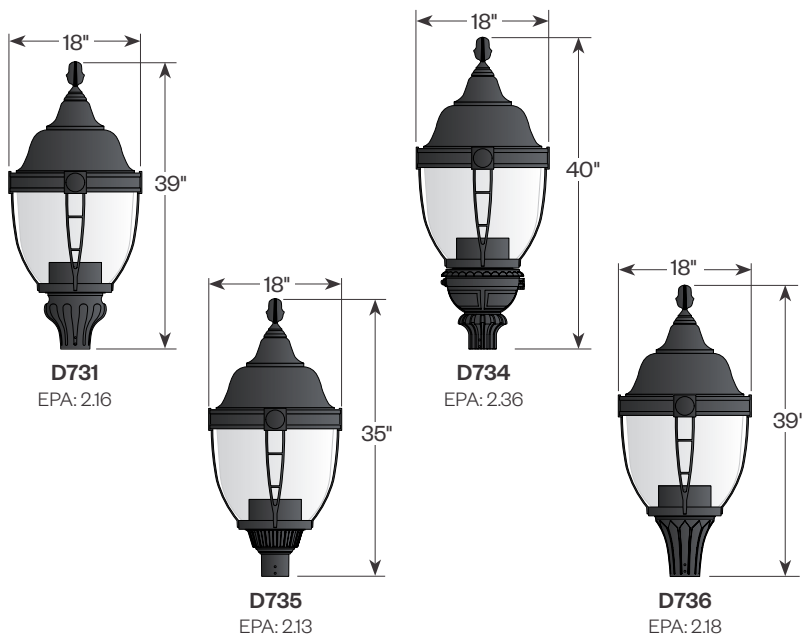

Avista Light Engine

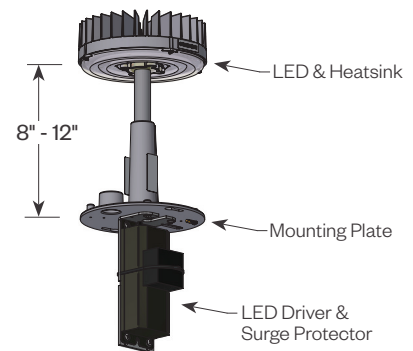

AVI-G3

Weight: 6.2 - 6.6 lbs*

* Weight varies with Power output due to variances of the driver.



D730 Series

LED Luminaire



PROJECT:

TYPE:

Performance Data - Engine Only


Multiplying Factors: (Multiplying Factor is based on 3000K IES file on website)

CCT:	1900K (NS)	2700K	3000K	4000K
Factor:	0.85	0.91	1.0	1.05


Model	CCT	Power Level	System Watts	LED Engine Lumens	LED Engine LPW
AVI-G3-SY	27	P1	30	3651	122.9
	30			4034	135.8
	40			4246	143.0
	NS			3445	116.0
	27	P2	44	5245	119.2
	30			5794	131.7
	40			6099	138.6
	NS			4948	113.0
	27	P3	60	7026	116.1
	30			7762	128.3
	40			8170	135.0
	NS			6628	110.0
	27	P4	86	9411	109.4
	30			10394	120.9
	40			10943	127.2
	NS			8878	104.0

Approximate lumens delivered from raw light engine.

Typical Light Distribution



T3 Diffuser



T5 Diffuser



Delta Intelligent Building Technologies

178 Bauer Drive, Oakland, NJ 07436 • P: 973-882-5010 F: 973-882-2605 • amerlux.com
Amerlux reserves the right to change details that do not affect overall function and performance.
LIT-E0053 • 01/05/26 • Page 3 of 4

D730 Series


LED Luminaire



PROJECT:


TYPE:

Spectral Power Distribution

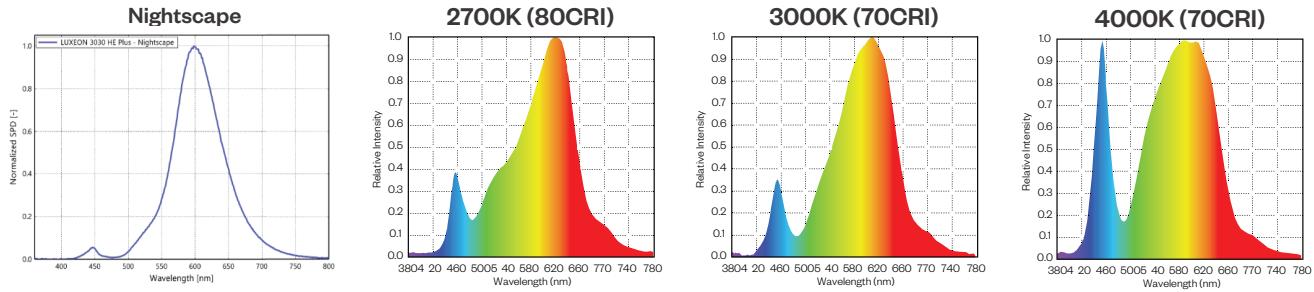


Nightscape (NS) Technology

- Unique spectral distribution that delivers highest flux while emitting <2% light of blue.
- The Nightscape (*low blue*) Avista is powered by Luxeon 3030 HE Plus which delivers high efficacy and superior life span.

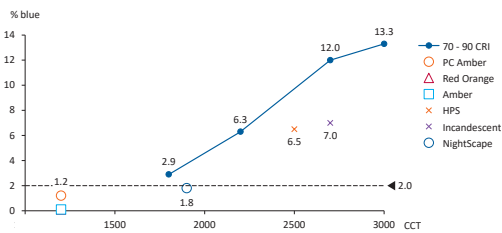

Blue radiation (microWatt, 400-500nm) per lumen



Blue radiation per lumen

