

Grüv® 2.5"

Recessed Linear LED




PROJECT:

TYPE:

Features

Small in scale, big on performance: Grüv® 2.5" LED, 5 or 10 watts/foot, delivers superior performance that makes it ideal for ambient lighting in ceiling and wall applications. At only 2.5" in width and less than 6" in depth, and providing superior visual aesthetic with snap-in hybrid micro-linear lens Grüv 2.5" LED is big enough for ambient lighting and small enough to add visual accent to your designs.

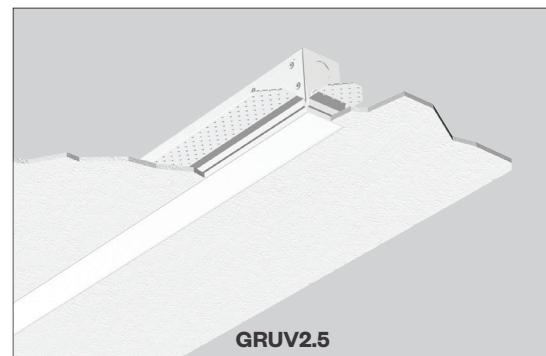

Product Overview

Type:	Recessed Linear, Direct	
Wattage:	5W/ft, 10W/ft (other wattages available see p2)	
Color Temp:	2700K, 3000K, 3500K, 4000K; Tunable White (2700K-5700K)	
CRI:	83 or 90+ typ. (2700K, 3000K, 3500K, 4000K) 90+ (Tunable White)	
Dimming (wired):	<u>Static White</u>	<u>Tunable White</u>
	0-10V, 1% dimming (standard)	0-10V TW, 1% dimming
	Lutron LDE1 Hi-lume® 1% Dim Soft-On/Fade-to-Black DALI dimming, 1% dim	DALI DT8, 1% digital dimming
Dimming (wireless):	Lutron Athena (integral wireless RF node)	Lutron Athena TW (integral wireless RF node)
	BubblyNet Bluetooth	

Certifications



Fixture Summary

Ceiling Types

4" Tech Zone	6" Tech Zone	9/16"	15/16" *	Gyp Board	Millwork	Perimeter J-Mold
No	No	Yes	Yes	Yes	Yes	Yes

* Flange Grid (GRUV2.5-FLG-GRID) model only.

Performance Data

Nominal Wattage/Foot	Delivered Lumens	LPW	Color Temp-CRI
5	2351	121.8	3500K-83
10	4374	115	3500K-83

Data is based on 4' fixture with Performance lens, 3500K, 83CRI IES files available on website.

Electrical Data

		4'		8'	
Wattage/Foot	Voltage	System Watts	Amps	System Watts	Amps
5	120V	19.3	0.16	38.6	0.32
	277V	19.3	0.07	38.6	0.14
10	120V	38	0.32	76	0.63
	277V	38	0.14	76	0.27

Electronic multi-volt (120-277VAC), constant current LED driver.

Standard Patterns

					Wall to Ceiling	Custom*
Yes	Yes	Yes	Yes	Yes	Yes	Yes

* Submit drawing, consult factory

Grüv® 2.5"

Recessed Linear LED



PROJECT:

TYPE:

Ordering Information

HW 120/277																																												
1	2	3	4	5	6	7	8	9	10																																			
1	Model			2	Optics			3	Wattage (per foot)																																			
GRUV2.5-FLG-A16* exposed flange GRUV2.5-FLG-GRID-A16* exposed flange grid mount GRUV2.5-GB-A16* gyp board trimless mud-in GRUV2.5-GRID-A16* grid mount GRUV2.5-IS-A16* independently suspended, millwork GRUV2.5-J/GB-A16* j-mold/gyp board trimless GRUV2.5-J/GRID-A16* j-mold/grid GRUV2.5-J/IS-A16* j-mold/independently suspended				PL performance lens (standard) DL designer lens SLDW straight blade louver, white aluminum, solid blades w/overlay SLDB straight blade louver, black, solid blades w/overlay SLDS straight blade louver, silver, solid blades w/overlay DRP1 1" drop lens			<table><tr><th>Standard</th><th>Optional</th></tr><tr><td>5 5W/ft</td><td>3 3W/ft*</td></tr><tr><td>10 10W/ft</td><td>4 4W/ft*</td></tr><tr><td></td><td>6 6W/ft</td></tr><tr><td></td><td>7 7W/ft</td></tr><tr><td></td><td>8 8W/ft</td></tr><tr><td></td><td>9 9W/ft</td></tr></table> * 4' min. length required		Standard	Optional	5 5W/ft	3 3W/ft*	10 10W/ft	4 4W/ft*		6 6W/ft		7 7W/ft		8 8W/ft		9 9W/ft																						
									Standard	Optional																																		
									5 5W/ft	3 3W/ft*																																		
									10 10W/ft	4 4W/ft*																																		
										6 6W/ft																																		
	7 7W/ft																																											
	8 8W/ft																																											
	9 9W/ft																																											
4	Color Temp.-CRI			5	Finish			6	Voltage																																			
<u>Static White</u> 27 2700K-83 279 2700K-90+ 30 3000K-83 309 3000K-90+ 35 3500K-83 359 3500K-90+ 40 4000K-83 409 4000K-90+ <u>Tunable White</u> TW9-2757 tunable white, 90CRI (2700K-5700K)				HW high reflectance matte white			120/277		<table><tr><td colspan="2">X</td><td colspan="2">X</td></tr><tr><td colspan="2">Length A</td><td colspan="2">Length B</td><td colspan="2">Length C</td></tr><tr><td colspan="2">- all patterns</td><td colspan="2">- all patterns</td><td colspan="2">- PU</td></tr><tr><td colspan="2">- IND/IND-S+</td><td colspan="2">- PR (2 lengths of 2)</td><td colspan="2">- PZ</td></tr><tr><td colspan="2">- CON/CON-S+</td><td colspan="2"></td><td colspan="2"></td></tr><tr><td colspan="2">- CUS</td><td colspan="2"></td><td colspan="2"></td></tr></table>		X		X		Length A		Length B		Length C		- all patterns		- all patterns		- PU		- IND/IND-S+		- PR (2 lengths of 2)		- PZ		- CON/CON-S+						- CUS					
											X		X																															
											Length A		Length B		Length C																													
											- all patterns		- all patterns		- PU																													
											- IND/IND-S+		- PR (2 lengths of 2)		- PZ																													
- CON/CON-S+																																												
- CUS																																												
8	Configuration			9	Drivers/Controls																																							
IND ¹ individual fixture, 2' to 8' in 1' increments IND-S+ ¹ individual with standard plus (see pg 8 for GRID or J/GRID only) CON continuous run > than 8', specify to nearest foot CON-S+ ¹ continuous run with standard plus (see pg 8 for GRID or J/GRID only) CUS custom made to measure, ± 1/8" of customer supplied field dimensions Standard Patterns (see pg 8 for details) PLL L left, (2) straights + (1) 90° corner, leg right PLR L right, (2) straights + (1) 90° corner, leg left PU U shape, (3) straight lengths + (2) 90° corners PR Rectangle shape, (4) straight lengths + (4) 90° corners PZ Z shape, (3) straight lengths + (2) 90° corners PWC wall to ceiling (1) 90° corner joining (2) segments For custom patterns, submit an EDR on amerlux.com				Wired - Static White O-10V 1% analogue dimming, 120-277VAC, dim to off when selected with wireless dimming control HILUME-H-ECO Lutron LDE1 Hi-lume® 1% dim Soft-On/Fade-to-Black DALI DALI dimming 120-277VAC, 1% dim Wired - Tunable White O-10V-TW 1% dimming, multi-volt (120V-277V) constant current DALI-DT8 1% digital dimming, CCT control per DALI DT8 (120V-277V) constant current Wireless - Static White AWN-R-WH-SR Lutron Athena wireless node, RF only, white, D4i/DALI-2 AWN-R-BL-SR Lutron Athena wireless node, RF only, black, D4i/DALI-2 AWN-R-WH-O10 Lutron Athena wireless node, RF only, white, 0-10V AWN-R-BL-O10 Lutron Athena wireless node, RF only, black, 0-10V AWN-R-OCC-WH-SR Lutron Athena wireless node, Occupancy & Daylight sensor, white, D4i/DALI-2 AWN-R-OCC-BL-SR Lutron Athena wireless node, Occupancy & Daylight sensor, black, D4i/DALI-2 AWN-R-OCC-WH-O10 Lutron Athena wireless node, Occupancy & Daylight sensor, white, 0-10V AWN-R-OCC-BL-O10 Lutron Athena wireless node, Occupancy & Daylight sensor, black, 0-10V BN-BT-OCC-WH-SR BubblyNet Bluetooth node, Occupancy & Daylight sensor, white, D4i/DALI-2 BN-BT-OCC-WH-O10 BubblyNet Bluetooth node, Occupancy & Daylight sensor, white, 0-10V Wireless - Tunable White AWN-R-WH-SR-TW Lutron Athena wireless node, RF only, white, D4i/DALI-2 AWN-R-BL-SR-TW Lutron Athena wireless node, RF only, black, D4i/DALI-2 AWN-R-OCC-WH-SR-TW Lutron Athena wireless node, Occupancy & Daylight sensor, white, D4i/DALI-2 AWN-R-OCC-BL-SR-TW Lutron Athena wireless node, Occupancy & Daylight sensor, black, D4i/DALI-2																																								
10	Options/Accessories																																											
CP Chicago Plenum (CCEA) WHIP 6' whip, 18/5 conductor EMC-PF ² emergency circuit requires power feed located in last fixture section (for other locations consult factory) PF ² extra power feed for additional circuiting EMB emergency battery pack (not available for lengths under 4')																																												

* The "A" refers to the sequential revision in a year and "XX" refers to the year of update. Updates coincide with improved performance while not changing the overall fixture aesthetic and are reflected in the published performance data. Please contact your Amerlux representative for explanations of changes.

¹ Lengths less than 4' may have restrictions based upon wattage, lengths, drivers or other options.

² Not available with IND (*individual*) configuration.

PROJECT:

TYPE:

Specifications

Application

Commercial and retail recessed ambient lighting can be customized with made to measure lengths, patterns, ceilings or wall mounted fixtures.

Construction

One piece extruded aluminum housing and trim. Die-formed, cold-rolled steel internal components and external mounting brackets. Numerous configurations accommodate most architectural ceiling conditions.

Optical

All lenses are snap-in, extruded acrylic, with a maximum length of 8'. Fixtures shipped with lenses installed. Amerlux's proprietary acrylic lens provides excellent transmission while effectively concealing source image. All louvers are retained with spring clips attached to louver side rails, for good fit and retention.

PL - Performance Lens provides high efficiency with greater lens surface brightness.

SLD - Straight blade Louver Direct has 0.5" high blades 0.75" on center with overlay.

ASY - Asymmetric 20° throw lens is backed high diffusion film that eliminates striations.

GRZ - Grazer lens for highlighting wall surfaces. Suggest cove installation. No overlay is used to enhance grazing performance. (see page 7)

DRPI - 1" Drop lens with illuminated end caps

LED

Amerlux's boards and patented connector design with brand name LEDs enables Amerlux fixtures to have excellent thermal management and offer a 5 year warranty. Our LED binning is within 3 MacAdam ellipse. Boards are configured for maximum flexibility resulting in even illumination no matter the fixture layout. LED boards are easily replaced in the field with just a Phillips screw driver.

	Static White	Tunable White
CCT:	2700K, 3000K, 3500K, 4000K	2700K-5700K
CRI:	83 or 90+ typical	90+ (92 typ)
R9:	16 @ CRI 83; >50 @ CRI 90+	>50
Life: 50,000+ hr., > 70% of initial lumens (L70)		

Electrical

Wiring: Supply wires are easily accessible through access plate on top of fixture.

WHIP: Optional factory installed 6' Greenfield whip (18/5 conductor) simplifies installation.

Standard Wattage: 5W/ft, 10W/ft.

Optional Wattages: 3W/ft, 4W/ft, 6W/ft, 7W/ft, 8W/ft, 9W/ft. (3W & 4W have a minimum length of 4'). For other wattages consult factory.

Emergency circuit via remote inverter or auxiliary emergency power supply (by others).

This product complies with IEEE C62.41 for surge endurance up to 2.5KV.

Amerlux® recommends using additional surge protection with this unit (supplied by others), surge damage is not covered under warranty.

EMC-PF - Emergency circuit requires power feed wire harness to be located in last fixture section for continuous runs. For other locations consult factory. Not available for individual (IND) configuration.

PF - Extra power feed wire harness for additional circuiting. Not available for individual (IND) configuration.

Finish

HW - High reflectance, matte white powder coat paint. Baked on finish for maximum durability and color stability.

Configurations/Lengths

IND - Individual fixtures are made of single standard lengths of 2' to 8' (in 1' increments). These are stand alone fixtures with matching End Caps, supplied with the mounting hardware. Lengths less than 4' may have restrictions based upon wattage, lengths, drivers or other options.

CON - Continuous runs, > 8', specified to nearest whole foot length in 1' increments. Runs made from standard lengths have End Caps at the beginning and end of run. Runs > 60' may require second power feed. Each housing has factory installed alignment pins. Mating fixtures are easily aligned and joined with "catch and latch" mechanisms out of sight, on top of the Housing. Wiring is made fast and positive with molded quick connectors.

S+ - Standard Plus is a field cuttable filler bracket that can be used when an Individual fixture or a Continuous run isn't to the nearest foot (+3/4" to 6" max per end). See page 8 for details.

CUS - Custom made to measure runs are made to nearest 1/8" of customer supplied field measurements or drawings. Custom lengths use the same hardware for hairline joining.

PXX - Standard Patterns consist of 90° corners with standard lengths (4' to 8' in 1' increments), continuous runs or made to measure lengths. Depending upon complexity of the pattern drawings may be required from the customer. If ordering please give overall lengths.

A'-B'-PLL - L Left - (1) 90° Corner (2) segments. Specify overall segments: A' & B'

A'-B'-PLR - L Right - (1) 90° Corner (2) segments. Specify overall segments: A' & B'

A'-B'-PR - Rectangle - (4) 90° Corners joining (4) segments. Specify overall segments: A' & B'

A'-B'-C'-PU - U shape - (2) 90° Corners joining (3) segments. Specify overall segments: A', B', & C'

A'-B'-C'-PZ - Z shape - (2) 90° Corners joining (3) segments. Specify overall segments: A', B', & C'

A'-B'-PWC - Wall to Ceiling - 90° joining bracket. Specify overall segments: A' & B' See page 8 for layouts.

Please note: Corners have lit mitered Lenses.

For custom patterns, submit an EDR on amerlux.com

Mounting

Intended for use in gypsum board, 9/16" Tee grid or Screw Slot, 15/16" Tee grid and millwork ceilings. Wall mounting J-Molding details available. For individual, continuous row, or pattern applications.

Please note - fixtures to be installed before gypsum board ceiling.

GRUV2.5-FLG-A16 - exposed flange, fixture into gyp board ceiling

GRUV2.5-FLG-GRID-A16 - exposed flange grid mount, fixture into 9/16" or 15/16" Tee ceilings

GRUV2.5-GB-A16 - gyp trimless mud, fixture plastered into gypsum board ceiling

GRUV2.5-GRID-A16 - grid mount, in 9/16" Screw Slot or Flat Tee ceilings

GRUV2.5-IS-A16 - independently suspended, fixture in wood ceiling

GRUV2.5-J/GB-A16 - J mold/gyp trimless, plastered in ceiling - J Channel wall side

GRUV2.5-J/GRID-A16 - J mold/grid, in 9/16" Screw Slot or Flat Tee ceilings - J Channel wall side

GRUV2.5-J-IS-A16 - J mold/independently suspended in ceiling - J Channel wall side

Options

EMB - Emergency battery pack - 10W output power, 90 min of illumination time, up to 1300 lm of initial light output. Illuminated test-switch/charging indicator light is provided. Wattage consumption by EM: 2.5W/ft (4ft fixture), 1.66W/ft (6ft fixture), 1.25W/ft (8ft fixture). Request can be made to light up 4ft section on 8ft unit.

Certifications

Approved to UL standards for damp locations as tested by CSA.

Intended for indoor use only

Chicago Plenum (CCEA) optional.

IC rated

Warranty

Amerlux's 5 year limited warranty. Please consult Amerlux website for details.

Grüv® 2.5"

Recessed Linear LED




PROJECT:

TYPE:


Product Details

GRUV2.5-FLG (exposed flange)


NOTE: Minimum ceiling opening must be held by installer for the full length of the run

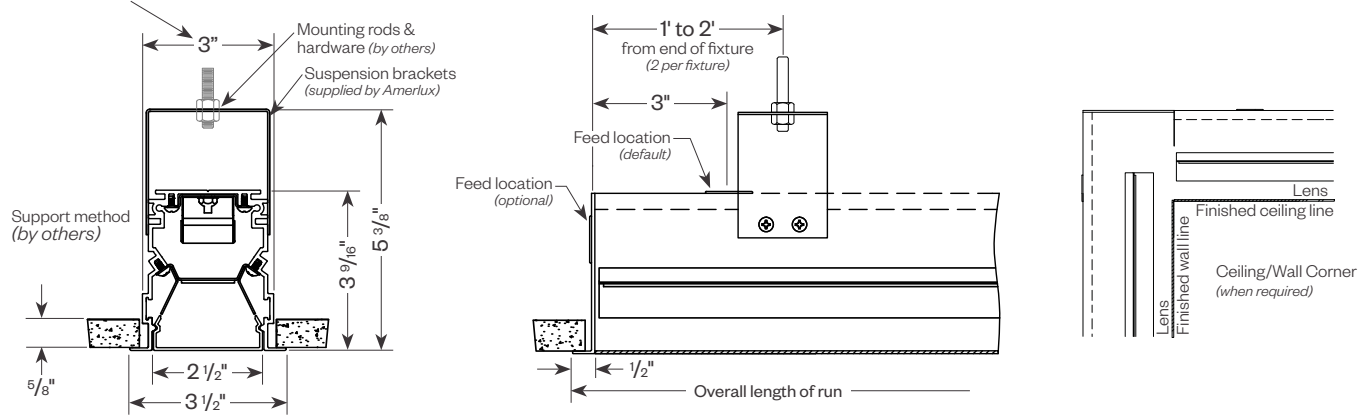

GRUV2.5-FLG-GRID (flange, grid mount)

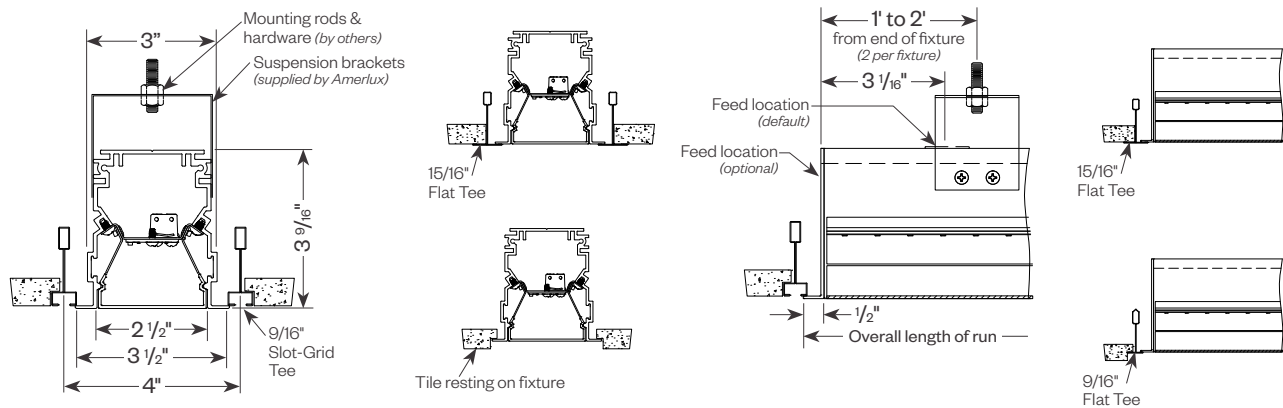

GRUV2.5-GB (gyp board trimless mud-in)

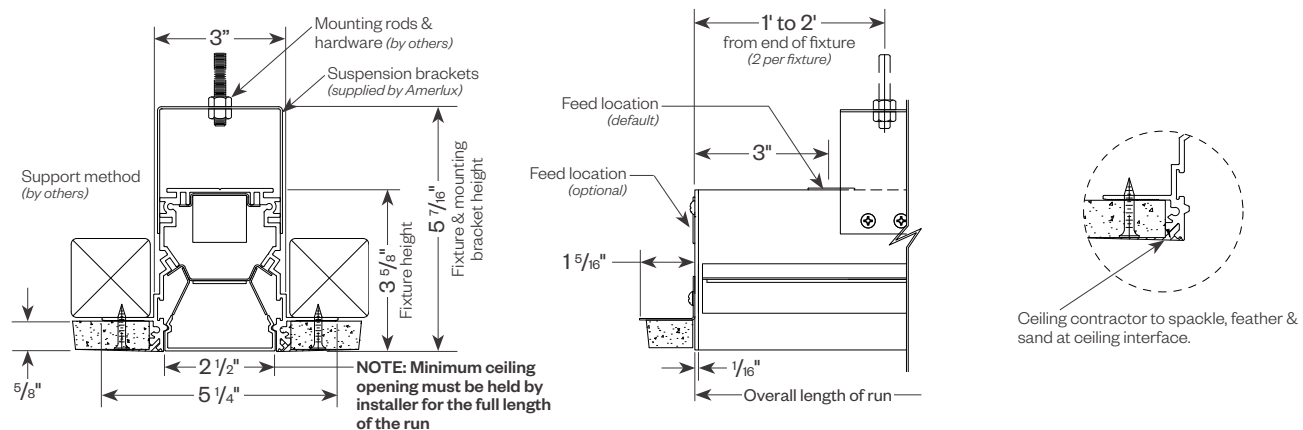

Delta Intelligent Building Technologies

178 Bauer Drive, Oakland, NJ 07436 • P: 973-882-5010 F: 973-882-2605 • amerlux.com
Amerlux reserves the right to change details that do not affect overall function and performance.
LIT-2035 • 03/17/26 • Page 4 of 13

Grüv® 2.5"

Recessed Linear LED



PROJECT:



TYPE:

Product Details (continued)



GRUV2.5-GRID (grid mount)

Compatible (see pg 8)


STANDARD PLUS

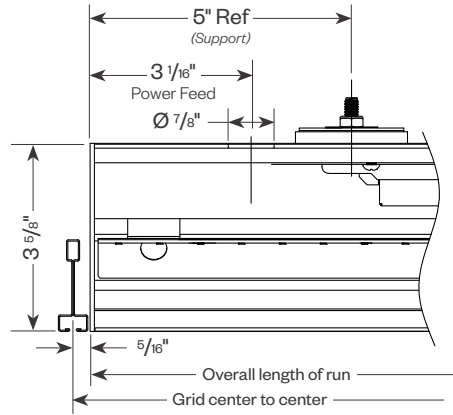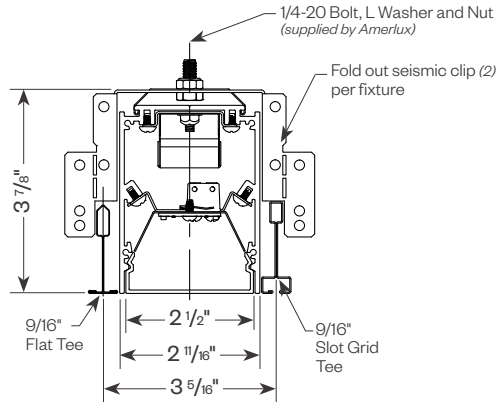



GRUV2.5-IS (independently suspended)

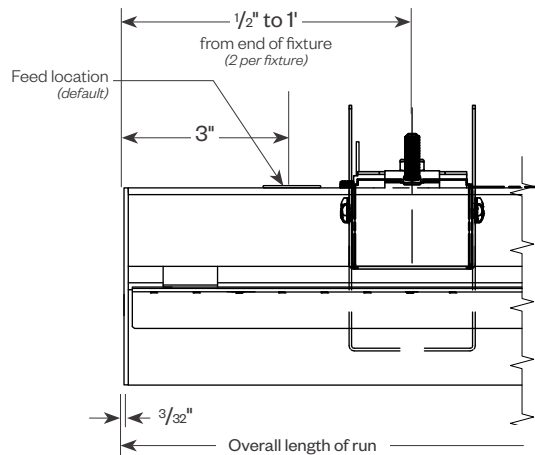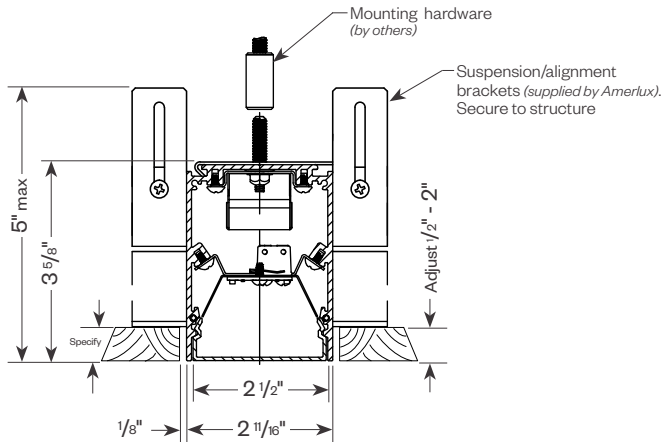

GRUV2.5-J/GB (j-mold/gyp board trimless)

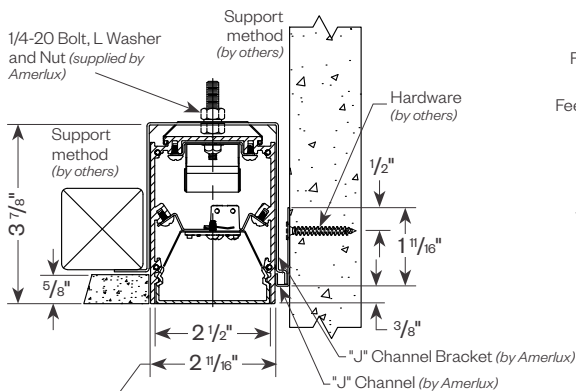

This dimension must be held by installer for the full length of the run

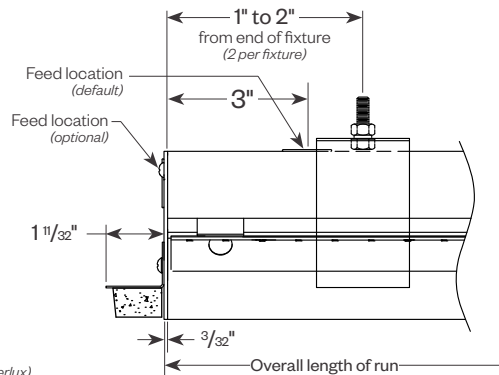

Ceiling contractor to spackle, feather & sand at ceiling interface.



Delta Intelligent Building Technologies

Grüv® 2.5"

Recessed Linear LED



PROJECT:


TYPE:

Product Details (continued)


GRUV2.5-J/GRID (j-mold/grid mount)

Compatible (see pg 8)


STANDARD PLUS

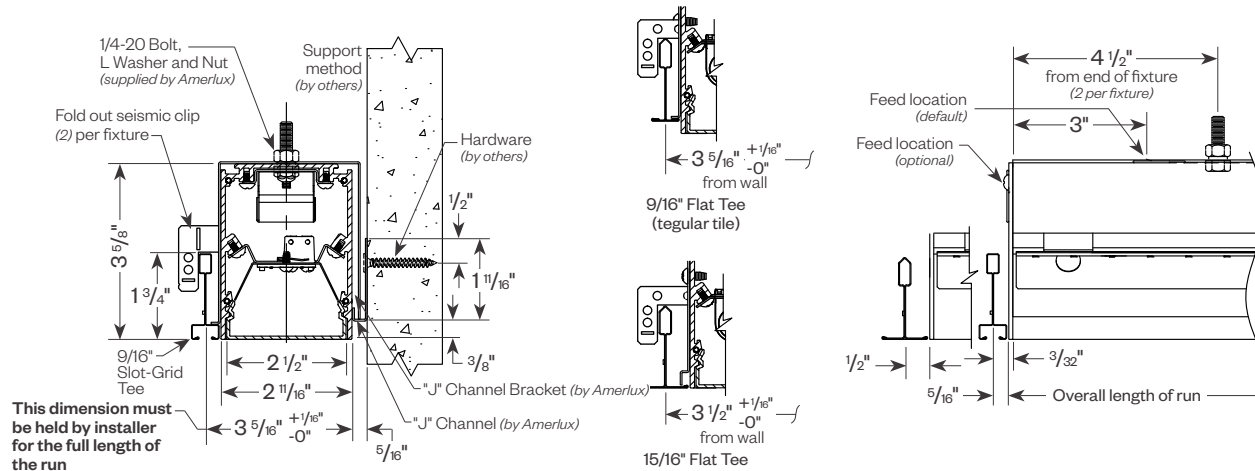


GRUV2.5-J/IS (j-mold/independently suspended)

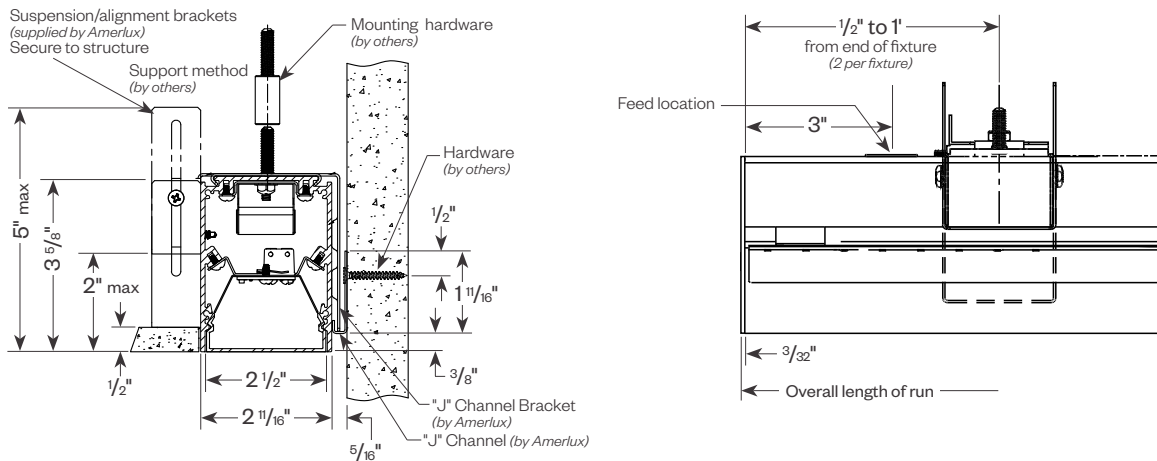

Optional Louver/Drop Lens



Optional Louver



Optional Drop Lens

Grüv® 2.5"

Recessed Linear LED




PROJECT:

TYPE:


STANDARD PLUS

STANDARD PLUS (FILLER):

Whenever a continuous run is less than a foot to the next full foot length consider ordering Standard Plus field cuttable bracket for a perfect look. Fits 9/16" Slot Grid and 9/16" T grid. It snaps in place easily from below and gets you close to the wall with a standard fixture. Saves time and money compared to made-to-measure. (max length: 6")




GRID VERSION

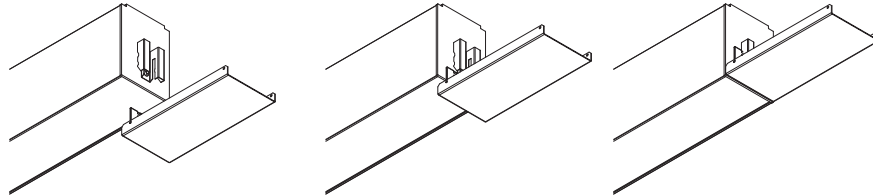


NOTE: Use with GRUV2.5-Grid and GRUV2.5-J/Grid

FILLER TRIM AND INSTALLATION (GRUV 1.5 GRID SHOWN HERE)

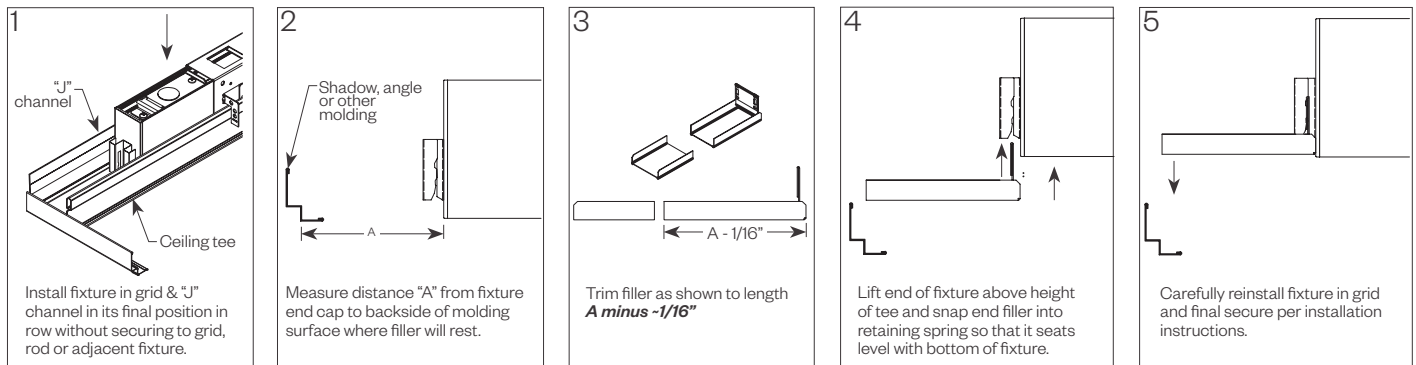

Toolless Joining

Line up the two housings by using the alignment splines & pins. Secure them together by using the Catch & Latch System on the top of the extrusion.

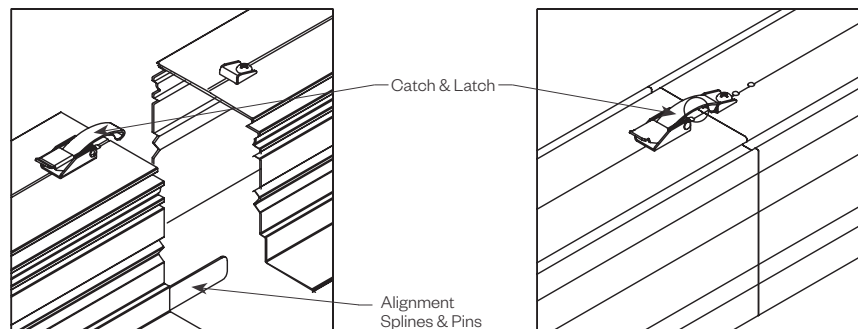


Optional Sensor/RF Node


Amerlux® has partnered with control companies to create building environments that are safer, and smarter, than ever before. At the heart of our partnership is intelligent RF nodes and Smart Sensor, the most advanced digital wireless communication and sensors available today. Integrated into Amerlux products.

Minimum run length is 3' for wireless sensor and RF node.

INDIVIDUAL (MIN 3' LENGTH)



RUNS



Grüv® 2.5"

Recessed Linear LED



PROJECT:

TYPE:

Grüv 2.5" Patterns

Standard Patterns

All corners are standard 90°, standard length legs.

Use standard lengths: 4' min to 8' in 1 foot increments.


Continuous runs must be the same length in pairs for closed configuration.

Custom Patterns


Please provide drawings of your configuration.

Made to Measure: +/- 1/8", consult factory.

PC - custom pattern, please provide drawings and consult factory



Grüv 2.5 Lens
Mitered Lens

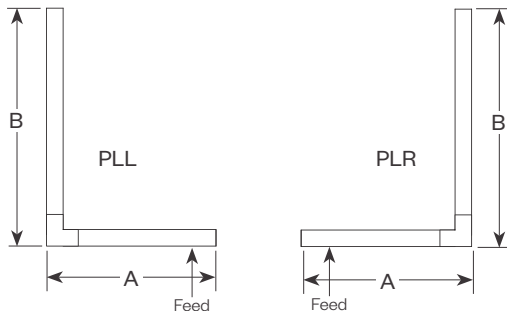


PLL - L Left, (2) straights + (1) 90° corner, leg right

PLR - L Right, (2) straights + (1) 90° corner, leg left

Provide overall lengths: A' & B'


Nomenclature: A-B-PLL A-B-PLR

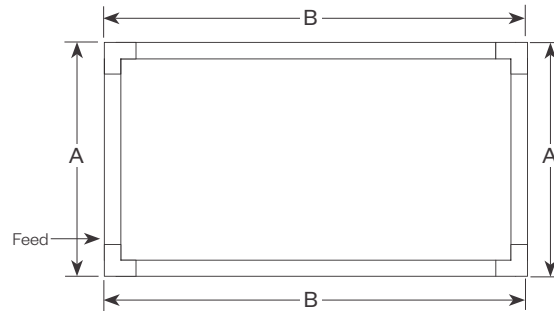

PR - Closed Rectangle, (4) straight lengths + (4) 90° corners

Provide overall lengths: A' & B'


Nomenclature: A-B-PR

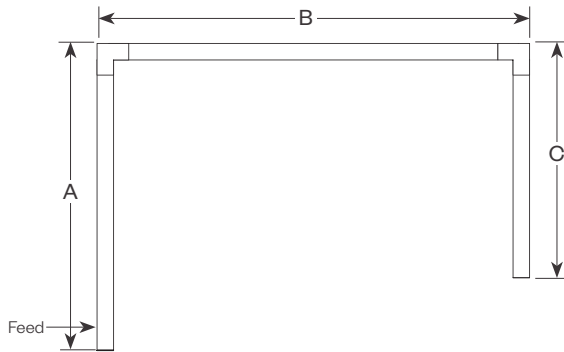

PU - Open U, (3) straight lengths + (2) 90° corners

Provide overall lengths: A', B' & C'


Nomenclature: A-B-C-PU

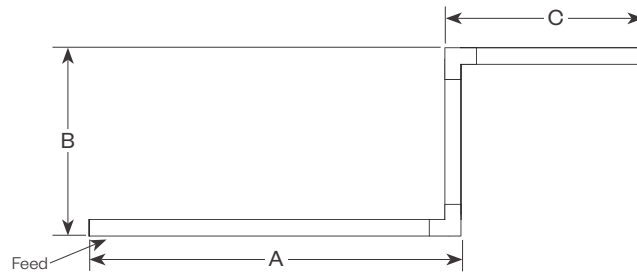

PZ - Open Z, (3) straight lengths + (2) 90° corners

Provide overall lengths: A', B' & C'

Nomenclature: A-B-C-PZ

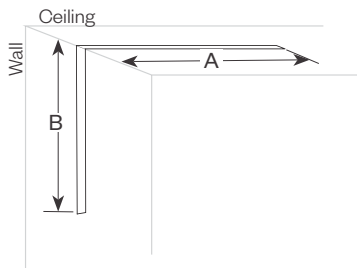

PWC - Wall to Ceiling - 90° joining bracket, 12" leg length standard

Provide overall lengths: A' & B'

Nomenclature: A-B-PWC



Grüv® 2.5"

Recessed Linear LED



PROJECT:

TYPE:

Performance Data

Multiplying Factors: (Multiplying Factor is based on 3500K-83 120V IES file on website)

Wattage:	3W	4W	5W	6W	7W	8W	9W	10W
Factor:	0.31	0.42	0.53	0.63	0.72	0.81	0.90	1.0


CCT Factors:					TW9
CRI	2700K	3000K	3500K	4000K	(@3500K)
83	0.92	0.97	1.0	1.02	-
90	0.81	0.84	0.86	0.89	0.86

GRUV 2.5" DIRECT PERFORMANCE LENS 10W 3500K 4FT

Total Watts: 38

Total Lumens: 4374

Source: 128 White LED's

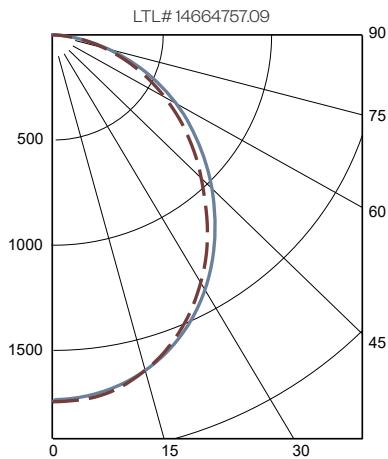

ZONAL LUMEN SUMMARY

Zone	Lumens	%Fixt
0-40	2101	48.0
0-60	3534	80.8
0-90	4374	100.0
90-180	0	0.0

Efficacy (lumens/watt) = 115 lm/W

COEFFICIENTS OF UTILIZATION

RC	80			
RW	70	50	30	10
RCR				
0	119	119	119	119
1	109	104	100	97
2	100	91	85	79
3	91	81	73	66
4	83	72	63	57
5	77	64	56	49
6	71	58	49	43
7	66	53	44	38
8	62	48	40	34
9	58	44	36	31
10	54	41	33	28


Note: Values expressed as % of total lumen output delivered to the task surface.

GRUV 2.5" DIRECT DESIGNER LENS 10W 3500K 4FT

Total Watts: 38

Total Lumens: 3658

Source: 128 White LED's

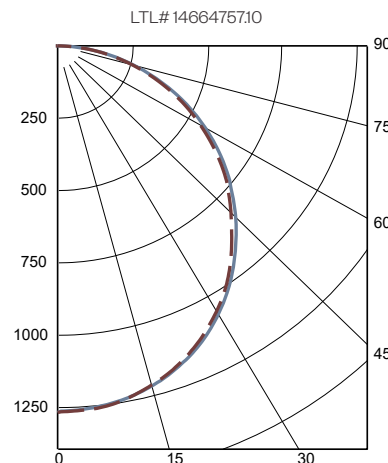

ZONAL LUMEN SUMMARY

Zone	Lumens	%Fixt
0-40	1606	43.9
0-60	2832	77.4
0-90	3658	100.0
90-180	0	0.0

Efficacy (lumens/watt) = 96.3 lm/W

COEFFICIENTS OF UTILIZATION

RC	80			
RW	70	50	30	10
RCR				
0	119	119	119	119
1	108	103	99	95
2	98	90	83	77
3	90	79	70	64
4	82	70	61	54
5	75	62	53	46
6	69	56	47	40
7	64	51	42	36
8	60	46	38	32
9	56	42	34	29
10	53	39	31	26

Note: Values expressed as % of total lumen output delivered to the task surface.

Grüv® 2.5"

Recessed Linear LED



PROJECT:

TYPE:

Performance Data (continued)

Multiplying Factors: (Multiplying Factor is based on 3500K-83 120V IES file on website)

Wattage:	3W	4W	5W	6W	7W	8W	9W	10W
Factor:	0.31	0.42	0.53	0.63	0.72	0.81	0.90	1.0

	Louver	
Finish:	SLV	BLK
Factor:	1.0	0.65

CCT Factors:					TW9
CRI	2700K	3000K	3500K	4000K	(@3500K)
83	0.92	0.97	1.0	1.02	-
90	0.81	0.84	0.86	0.89	0.86


GRUV 2.5" DIRECT STRAIGHT BLADE LOUVER (SLV) 10W 3500K 4FT

Total Watts: 38

Total Lumens: 2694

Source: 128 White LED's

LTL# 14664757.11

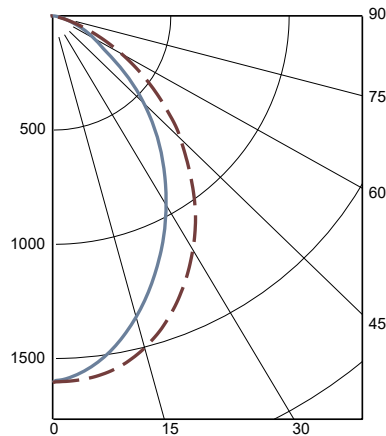

ZONAL LUMEN SUMMARY

Zone	Lumens	%Fixt
0-40	1663	61.7
0-60	2469	91.7
0-90	2694	100.0
90-180	0	0.0

Efficacy (lumens/watt) = 70.9 lm/W

COEFFICIENTS OF UTILIZATION

RC	80			
RW	70	50	30	10
RCR				
0	119	119	119	119
1	111	107	104	101
2	103	96	91	86
3	96	87	80	75
4	89	79	71	65
5	82	71	64	58
6	77	65	57	52
7	72	60	52	47
8	67	55	48	42
9	63	51	44	39
10	59	47	40	35

Note: Values expressed as % of total lumen output delivered to the task surface.


GRUV 2.5" DIRECT DROP LENS 10W 3500K 4FT

Total Watts: 38

Total Lumens: 4566

Source: 128 White LED's

LTL# 14664757.12

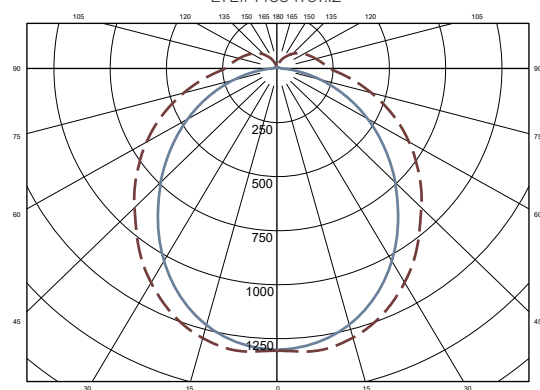

ZONAL LUMEN SUMMARY

Zone	Lumens	%Fixt
0-40	1661	36.4
0-60	2930	64.2
0-90	4038	88.4
90-180	528	11.6

Efficacy (lumens/watt) = 120.1 lm/W

COEFFICIENTS OF UTILIZATION

RC	80			
RW	70	50	30	10
RCR				
0	116	116	116	116
1	105	99	94	90
2	95	86	78	72
3	86	75	66	59
4	78	66	57	50
5	72	59	50	43
6	67	53	44	37
7	62	48	39	33
8	57	44	35	29
9	54	40	32	26
10	50	37	29	24

Note: Values expressed as % of total lumen output delivered to the task surface.

Grüv® 2.5"

Recessed Linear LED



PROJECT:

TYPE:

Static White - Dimming Compatibility

Amerlux® Gruv fixtures are compatible with all major dimming protocols prevalent in the United States. Please see below for general compatibilities and wiring diagrams. Amerlux recommends testing your unique dimming configuration as the exact full configuration (*Dimmer, Fixture Quantity, Voltage, etc*) may affect dimming performance.

--- NOTE: INFORMATION BELOW IS FOR WIRED DIMMERS ONLY. FOR WIRELESS DIMMERS, CONSULT FACTORY ---


0-10V - DIMMING (Standard)

Integrates into a variety of building management and daylighting controls

Notes:

- 120V or 277V*
- Dims down to 1% light output
- Requires interface to turn off power to driver
- Consult Dimming manufacturer for installation instructions - **DO NOT SHARE NEUTRALS!**

0-10V Wiring Diagram

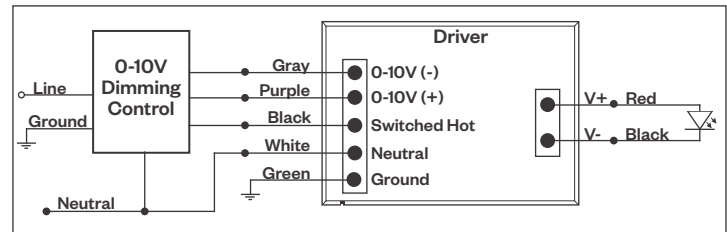

Compatible Dimmers†:

Wall Box			Central System
Lutron:	Wattstopper:	Leviton:	Lutron Grafik Eye with GRX-TV1 Interface
Diva - DVSTV	ADF-120277	Renoir II	
Maestro - MS-Z101			
Nova-T - NTSTV-DV			


LUTRON LDE1 DIMMING

Integrates into Lutron EcoSystem building management

Notes:

- 120VAC or 277VAC*
- Dims down to 1% Soft-On/Fade-to-Black
- EcoSystem Control
- Consult Dimming manufacturer for installation instructions - **DO NOT SHARE NEUTRALS!**

LDE1 (HILUME-H-ECO) EcoSystem Digital Control Wiring Diagram

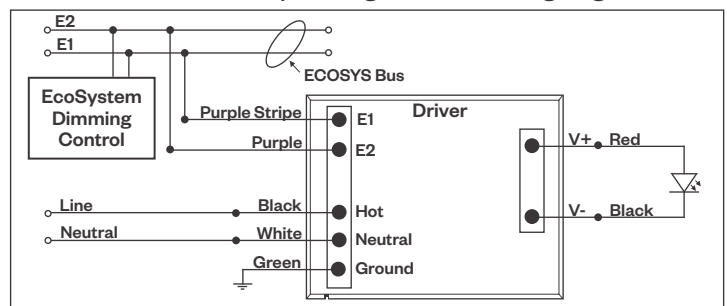

Compatible Dimmers†:

Lutron ECO System	Central System
Pow Pak Dimming Modules	Lutron EcoSystem compatible controls
Energi Savr Node	
Grafik Eye QS/Homeworks	
QS Control Unit	
Quantum Hub	
Homeworks QS/My Room	

Notes:

* Driver is 277VAC dimmable with appropriate dimmer (by others). All provided wiring diagrams show 120VAC wiring colors and method. Please refer to 277VAC dimmer installation instructions for 277VAC wiring diagrams.

† The absence of a dimmer from the lists above does not imply incompatibility. Please consult factory for compatibility inquiries.

Grüv® 2.5"

Recessed Linear LED



PROJECT:

TYPE:

Static White - Dimming Compatibility *(continued)*

Amerlux® Gruv fixtures are compatible with all major dimming protocols prevalent in the United States. Please see below for general compatibilities and wiring diagrams. Amerlux recommends testing your unique dimming configuration as the exact full configuration (*Dimmer, Fixture Quantity, Voltage, etc*) may affect dimming performance.

--- NOTE: INFORMATION BELOW IS FOR WIRED DIMMERS ONLY. FOR WIRELESS DIMMERS, CONSULT FACTORY ---

DALI - DALI DIMMING 120V-277V

Digital control protocol allows individual fixture control


Notes:

- 120VAC - 277VAC*
- Dims down to 1% light output in most cases

Compatible Dimmers*:

Wall Box	Central System
Leviton CD250 Controller	Dynalite
	Fifth Light


DALI Wiring Diagram

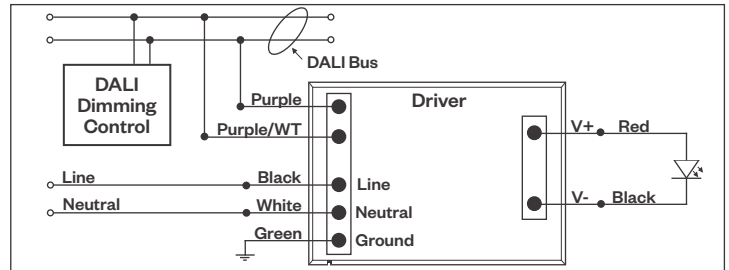

Emergency Fixture with Built-In Battery Pack

EMERGENCY FIXTURE WITH BUILT-IN BATTERY PACK (EMB) WIRING:

Note: EMB not available on lengths under 4'.

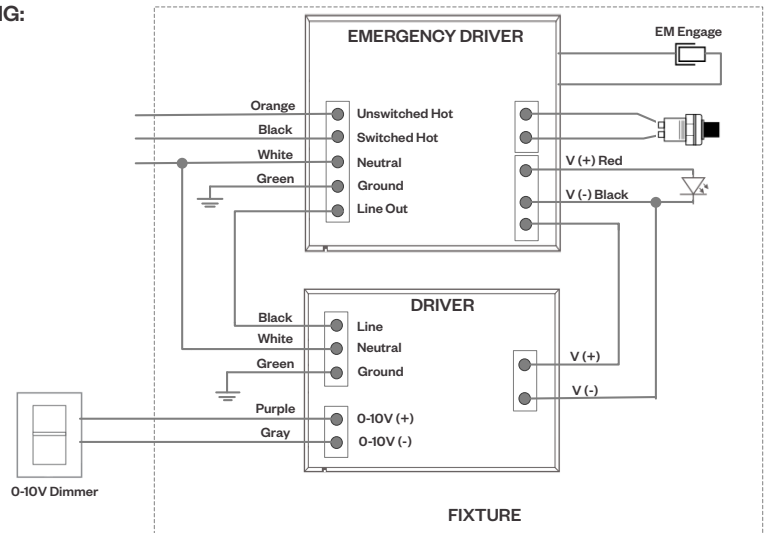

Notes:

* Driver is 277VAC dimmable with appropriate dimmer (*by others*). All provided wiring diagrams show 120VAC wiring colors and method. Please refer to 277VAC dimmer installation instructions for 277VAC wiring diagrams.

* The absence of a dimmer from the lists above does not imply incompatibility. Please consult factory for compatibility inquiries.

Grüv® 2.5"


Recessed Linear LED



PROJECT:

TYPE:

Tunable White

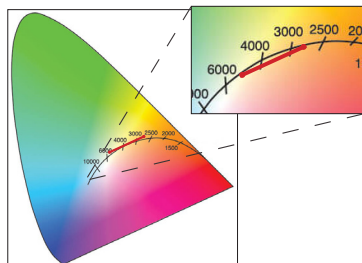


Tunable White range from 2700K-5700K, 90 CRI.
See wiring diagrams below.

Tunable White - Dimming Compatibility


Amerlux® Gruv fixtures are compatible with all major dimming protocols prevalent in the United States. Please see below for general compatibilities and wiring diagrams. Amerlux recommends testing your unique dimming configuration as the exact full configuration (*Dimmer, Fixture Quantity, Voltage, etc*) may affect dimming performance.

--- NOTE: INFORMATION BELOW IS FOR WIRED DIMMERS ONLY. FOR WIRELESS DIMMERS, CONSULT FACTORY ---

0-10V Wiring Diagram

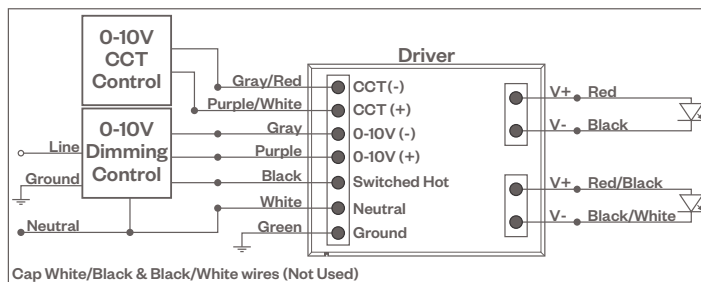

DALI DT8 Wiring Diagram

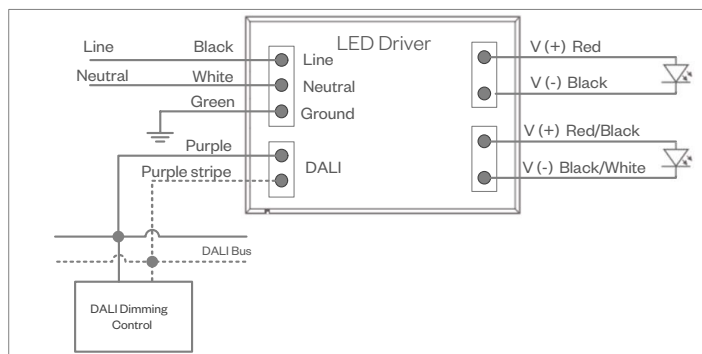

Notes:

* Driver is 277VAC dimmable with appropriate dimmer (by others). All provided wiring diagrams show 120VAC wiring colors and method. Please refer to 277VAC dimmer installation instructions for 277VAC wiring diagrams.

† The absence of a dimmer from the lists above does not imply incompatibility. Please consult factory for compatibility inquiries.