

Flat Top Bollard

LED Bollard



PROJECT:

TYPE:

Features

Amerlux's Bollards provide ambient lighting to property; improve security by increasing visibility and mark pathways and driveways, as well as accent landscaping, walkways, buildings and parking areas.

Product Overview

Type:	Exterior Accent/Ambient
Wattage:	11W, 17W, 24W
Lumen Output:	2461 lm (24W, 5000K)
Color Temp:	3000K, 4000K, 5000K
CRI:	83
Height:	41 5/8" (standard)
Diameter:	7"



Certifications



Fixture Summary

Construction:

Extruded aluminum housing with flush mounting base & vandal-resistant screws. Flat top with an internal driver tray for easy maintenance. Aluminum LED board.

Reflector:

Specially designed aluminum cone reflector for LED.

Lens:

Clear polycarbonate lens.

Driver:

- Electronic driver, 120-277V, 50/60Hz.
- 0-10V dimming driver.

Mounting Option:

Mounting Kit with 8" Anchor Bolts, included.
Cannot be pre-shipped.

Finish:

Premium quality thermoset polyester powdercoat for a durable finish over a chromate conversion coating.
Custom colors available upon request.

Options:

- Surge protection.
- 180° glare shield, finish matches fixture finish.
- Bollard can be cut to custom heights upon request.

Listing & Ratings:

- CSA listed for wet location, IP65.
- Operating temperature: -40°C to +40°C.

Flat Top Bollard

LED Bollard




PROJECT:

TYPE:


Ordering Information

AXB7F				
1	2	3	4	5
1 Model	2 Wattage	3 Color Temp	4 Finish	5 Option
AXB7F	11 17 24	30 3000K 40 4000K 50 5000K	Z bronze B black C custom, consult factory	SP surge protection GS 180° glare shield, finish matches fixture finish

Product Detail

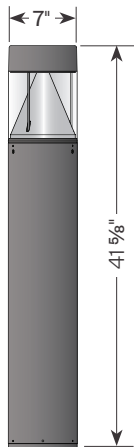

Anchor Bolts Mounting Kit (included)



Mounting Kit, includes bracket & (3) 8" zinc-plated anchor bolts.

Performance Data

Delivered Lumens

CCT	Wattage		
	11W	17W	24W
3000K	1037	1452	2178
4000K	1125	1575	2362
5000K	1172	1641	2461

AXB7F/5K

