

Solace

3" Shallow Round Adjustables



PROJECT:





TYPE:

Features

Solace 3" Downlights are the complete downlight family for any ceiling surface and low plenum ceiling. Round or Square apertures, available as downlight, adjustable or wallwash. Optional Solite lensing provides whisper quiet aesthetics. The trim options available as trimmed, trimless or millwork. The pinhole and shower pinhole trim makes this a complete a downlight to design the entire space with the same look.

Product Overview

Type: Shallow Round Adjustable
 Wattage: 8W, 12W, 17W
 Color Temp: 2700K, 3000K, 3500K, 4000K
 CRI: 83 typ. or 90+ typ.
 CrispWhite & 3K Class A available
 Dimming: TRIAC & ELV, 5% Dim, 120/277VAC
 0-10V, 1% Dim, 120/277VAC
 Lutron Hi-lume® EcoSystem Premier, 0.1% dim with soft on & fade to black, 120/277VAC (Consult factory for Lutron lead time)



Certifications



5 year limited warranty
 AMERLUX LED



Fixture Summary

Fixture Type

Round/Square	New Construction	Trim	Trimless	Millwork
Yes	Yes	Yes	Yes	Yes

See separate spec sheet for Square trims.

Performance Data (see page 5 for full breakdown)

Watts	Delivered Lumens	LPW	CBCP	Color Temp-CRI
8	844	101	5005	3000K-83
12	1243	99	7365	3000K-83
17	1593	95	9443	3000K-83

Data is based on 3000K-83 120V IES files available on website.

Data is based on Flood optic (no Solite). See pg 6-8 for other beam spreads.

Electrical Data

Voltage	8W		12W		17W	
	System Watts	Amps	System Watts	Amps	System Watts	Amps
120V	8	0.067	12	0.10	17	0.142
277V	8	0.029	12	0.043	17	0.061

Electronic constant current LED driver.

Solace

3" Shallow Round Adjustables



PROJECT:

TYPE:

Ordering Information - Housing/Frame

120/277							
1	2	3	4	5	6	7	8
1 Model SOL-RA-NC (New Construction & Insulated Ceiling (IC rated)) SOL-RA-CP (Chicago Plenum (CCEA) housing) SOL-RA-IC ^{T24} (Insulated Ceiling (IC)/air tight)		2 Style T trimmed (2" max ceiling thickness) TL trimless (5/8" max ceiling thickness) MWK millwork (for 1/2" - 1/16" ceiling thickness) MWK1 millwork (for 3/4" - 1-1/2" ceiling thickness) MWK2 millwork (for 1-1/2" - 2" ceiling thickness)			3 Wattage 8 (844 lm) 12 (1243 lm) 17 (1593 lm) (Lumen data based on 3000K-83, FL optic. See pg 5 for other performance data)		
4 Voltage 120/277 (universal voltage)		5 Beam Spread SP spot, 15° FL flood, 25° WF wide flood, 36° VWF very wide flood, 55°		6 Color Temp 83 CRI 90+ CRI ^{T24} 27 2700K-83 279 2700K-90+ CRISP* CrispWhite 30 3000K-83 309 3000K-90+ 3CLA* 3000K Class A 35 3500K-83 359 3500K-90+ 40* 4000K-83 409* 4000K-90+ * Consult factory for lead time.			
7 Driver (for non-dimming, select LE/TE option) LE/TE ^{T24} TRIAC/ELV dimming 0-10V ^{T24} 0-10V dimming, 1% dim HILUME-P-ECO - Lutron Hi-lume® EcoSystem Premier 0.1% dim with soft on & fade to black (Consult factory for Lutron lead time)				8 Options/Accessories HB49 - hanger bars from min 29" to max 49" (26" hanger bars included as default options) Note: 26" hanger bars are included as standard. Choose HB49 option above for larger mounting spaces only.			

Ordering Information - Trim

1	2	3	4
1 Model SOL-RA ^{T24} (downlight) SOL-RPA (pinhole downlight) SOL-RPASHW (pinhole downlight shower)		2 Style T trimmed TL trimless (not available for use with shower trim) MWK millwork (not available for use with shower trim)	
		3 Finish RA Trim <u>Trimmed</u> <u>Trimless/Millwork</u> MBW matte black, white flange MB matte black MWW matte white, white flange MW matte white SLVW matte silver, white flange SLV matte silver MBB matte black, black flange SLVS matte silver, silver flange RPA/RPASHW Trims (T/TL/MWK) MB matte black MW matte white SLV matte silver	
4 Options/Accessories SOL solite beam softening lens (comes standard with RPASHW trim, not JA8/Title 24 compliant)			

^{T24} JA8/Title 24 Compliant

Solace

3" Shallow Round Adjustables



PROJECT:

TYPE:

Specifications

Application

Retail and commercial accent and display lighting

Housing Construction

20 ga. steel painted matte black
Extruded aluminum heatsink
Formed aperture plate with 5/8" lip (GB-standard)
Cast aluminum plaster frame with perforated face (for trimless option)
Integral adjustable locking mounting bars
Inherently protected

Reflector Trim Construction

Die-cast reflector
Pinhole trim features die cast faceplate and baffle
Pinhole shower trim features solite glass lens and silicone flange gasket

Optical

0-40° lockable tilt, 360° lockable rotation, and lockable aiming (ceiling thickness greater than 1" will affect max angle adjustment)
Beam Spreads: Spot, 15°; Flood, 25°; Wide Flood, 36°; Very Wide Flood, 55°
Optional **SOL** - solite beam softening lens (up to -5° widening of beam)

LED

Color Temp Options: 2700K, 3000K, 3500K, 4000K
CRI: 83 typ. or 90+ typ.
CrispWhite* & Class A** 3000K (high gamut) available
R9 Values: 11 (83 CRI), 55 (92 CRI)
Binning: 3 MacAdam (SDCM)
Life: 50,000+ hrs, > 70% of initial lumens at 50,000 hrs
** CrispWhite: CrispWhite Technology delivers the warmth of colors expected from a high 90 CRI solution but also creates the natural crisp white color that is pleasing to the eye. It creates the most impactful lighting ever available, by revealing the richest whites and vibrant colors that pop.*
*** Class A LED: Class A LED's have a CRI > 80 and a GAI > 80. CRI defines color "Naturalness" and GAI defines color "Saturation." Both being high delivers rich colors and pure whites.*

Electrical

Wattage: 8W, 12W, 17W
Electronic constant current LED driver, 120/277VAC input
This product complies with IEEE C62.41 for surge endurance up to 2.5KV. Amerlux® recommends using additional surge protection with this unit (supplied by others), surge and over voltage damage is not covered under warranty.
Emergency option available through circuiting/inverter only

Drivers

LE/TE - Leading Edge (Triac, Forward Phase) or Trailing Edge (ELV, Reverse Phase)
0-10V and Lutron systems also available
See pages 9-10 for more dimming information

Finish (Trim)

Powder coat paint

Mounting

26" Hanger bars included. Side brackets allow for rigid conduit pipe mounting along with additional 1/2" adjustment of housing vertical position
Optional **HB49** - hanger bars from min 29" to max 49" available
Trimmed Fixture:
For use in grid or sheetrock ceilings, 5/8" - 2" standard
Trimless Fixture (not available with Shower trim):
For use in sheetrock ceilings, max ceiling thickness 5/8"
For sheetrock ceilings beyond 5/8" consult factory
Millwork Fixture:
Millwork extension collars are based on ceiling material specifications and thickness. Provides flush trim appearance level with ceiling material. Max thickness 2"
Note: Ceiling thickness greater than 1" will affect max angle adjustment.

Certifications

CSA damp as tested to UL 1598 standards
Wet location (SHW trim) - for indoor, high humidity/moisture from below applications only
IC/AT rated
JA8 Title 24 compliant (see ordering page for options that apply)

Warranty

5 year limited warranty

Weight

Housing and trim - 7 lbs.

Solace

3" Shallow Round Adjustables




PROJECT:

TYPE:


Product Details

Solace Round Adjustables

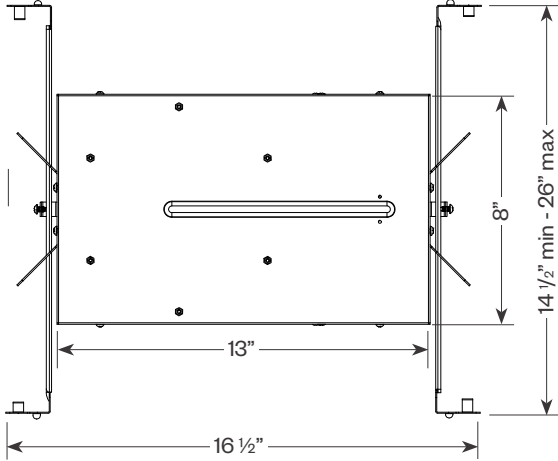


Plaster Frame Installation Detail (for trimless fixture only)

1. Reflector Trim
2. Aperture Plate
3. Ceiling 5/8"
4. Cast Aluminum Plaster Frame
5. Plaster Skim Coat (by others)
6. 6-32 Type F Thread Cutting Screw




Millwork Detail

1. Reflector Trim
2. Millwork Ring
3. Aperture Plate
4. Wood Ceiling 2" Max
5. Extension collar (see ordering information for ceiling thicknesses)
6. 1/16" required for trim to be flush with ceiling




Round Adjustable

Trimmed

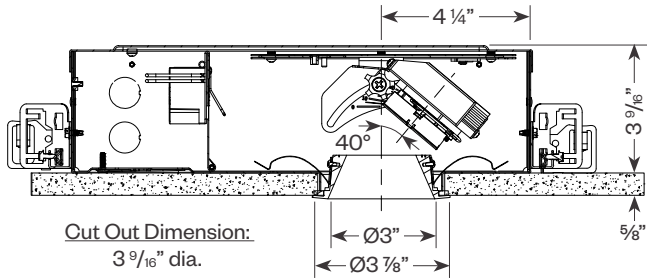


Trimless & Millwork

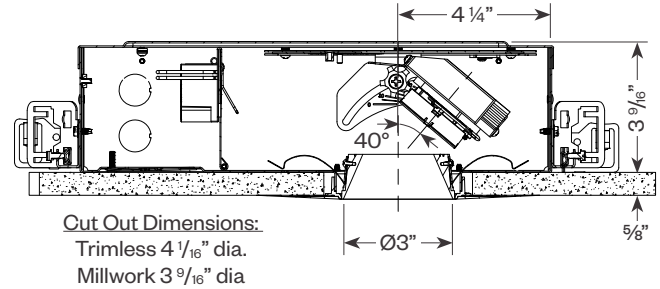


Round Pinhole Adjustable

Trimmed

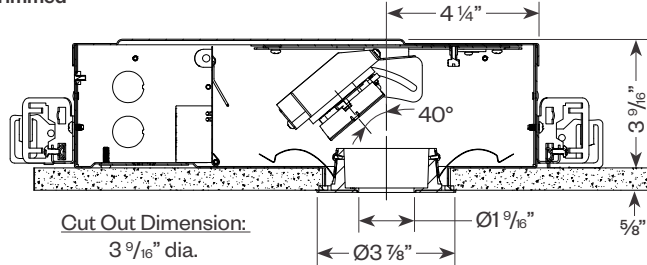


Trimless & Millwork

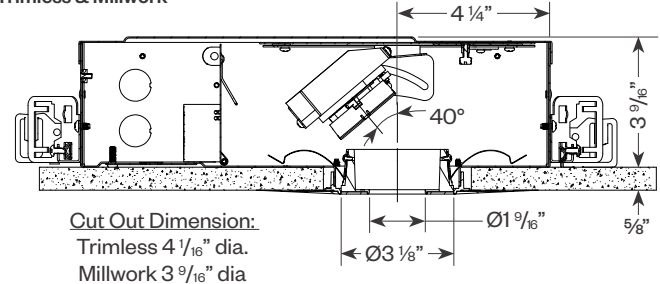

Round Pinhole Adjustable Shower

Trimmed

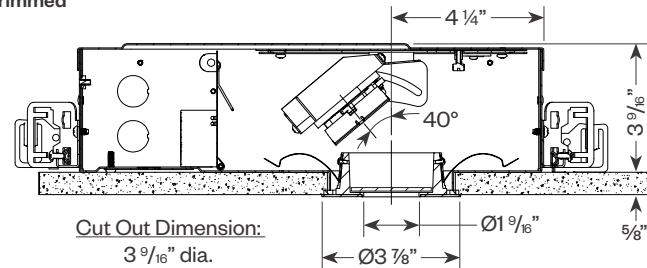

Solace

3" Shallow Round Adjustables



PROJECT:

TYPE:

Solace Round Adjustables Performance Breakdown *(without Solite lens)*

Wattage	Color Temp.	SP (15°)		FL (25°)		WF (36°)		VWF (55°)		Pinhole Spot (15°)	
		Lumens	LPW	Lumens	LPW	Lumens	LPW	Lumens	LPW	Lumens	LPW
8W	27	783	93	827	99	752	89	797	95	322	38
	30	799	95	844	101	767	91	814	97	329	39
	35	815	97	861	103	782	93	830	99	335	40
	40	839	100	887	106	805	96	854	102	345	41
	279	671	80	709	84	644	77	683	81	276	33
	309	695	83	735	87	667	79	708	84	286	34
	359	719	86	760	90	690	82	732	87	296	35
	409	719	86	760	90	690	82	732	87	296	35
	CRISP	520	62	549	65	498	59	529	63	214	25
	3CLA	559	67	591	70	537	64	569	68	230	27
12W	27	1153	92	1218	97	1106	88	1173	94	474	38
	30	1176	94	1243	99	1129	90	1197	96	484	39
	35	1200	96	1267	101	1151	92	1221	98	493	39
	40	1235	99	1305	104	1185	95	1257	101	508	41
	279	988	79	1044	83	948	76	1006	80	406	32
	309	1023	82	1081	86	982	79	1042	83	421	34
	359	1059	85	1118	89	1016	81	1078	86	435	35
	409	1059	85	1118	89	1016	81	1078	86	435	35
	CRISP	765	61	808	65	734	59	778	62	314	25
	3CLA	823	66	870	70	790	63	838	67	339	27
17W	27	1478	88	1561	93	1418	84	1504	89	608	36
	30	1508	90	1593	95	1447	86	1535	91	620	37
	35	1538	92	1625	97	1476	88	1566	93	632	38
	40	1583	94	1673	100	1519	90	1612	96	651	39
	279	1267	76	1338	80	1215	72	1289	77	521	31
	309	1312	78	1386	82	1259	75	1335	79	539	32
	359	1357	81	1434	85	1302	77	1382	82	558	33
	409	1357	81	1434	85	1302	77	1382	82	558	33
	CRISP	980	58	1035	62	941	56	998	59	403	24
	3CLA	1057	63	1115	66	1013	60	1075	64	434	26

PROJECT:

TYPE:

Performance Data - Round Adjustable (SOL-RA with 0° Tilt Angle)





Multiplying Factors: (Multiplying Factor is based on 3000K-83 120V IES file on website)

Wattage:	8W	12W	17W
Factor:	0.53	0.78	1.0

Lens:	Solite
Factor:	0.95

CCT:	2700K-83	3000K-83	3500K-83	4000K-83	2700K-90+	3000K-90+	3500K-90+	4000K-90+	CRISP	3CLA
Factor:	0.98	1.0	1.02	1.04	0.84	0.87	0.90	0.91	0.65	0.70


17W LED, 3000K-83, 0° Tile Angle

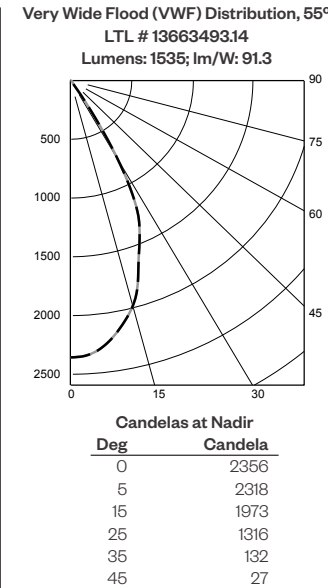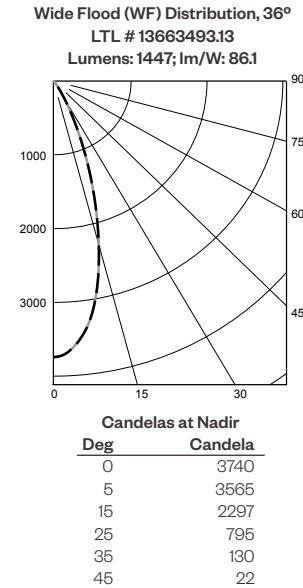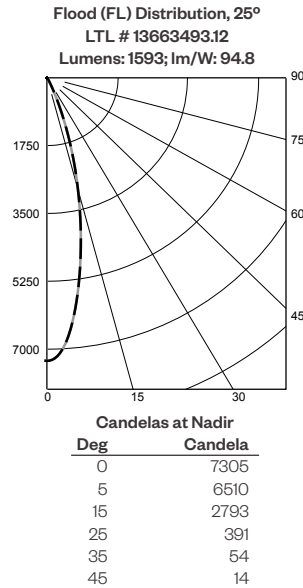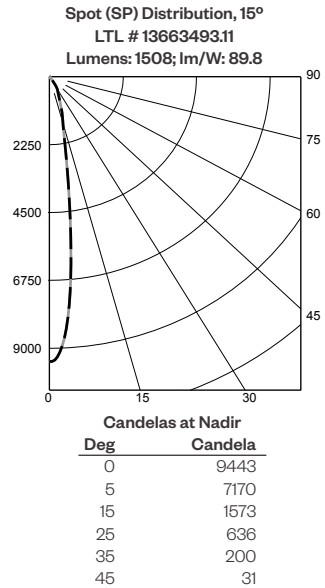

Application Data - Round Adjustable (SOL-RA with 0° Tilt Angle)

Notes and Definitions:

- Beam spread is to 50% center beam candlepower (CBCP).
- D=Distance to floor or wall.
- FC=Footcandles on floor or wall at center beam aiming location.
- L=Effective Visual Beam length in feet (50% of maximum footcandle level).
- W=Effective Visual Beam width in feet (50% of maximum footcandle level).



0° Aiming Angle Horizontal Footcandles

Spot	D	FC	L	W
	5.0'	378	1.3	1.3
	7.5'	168	2.0	2.0
	10.0'	95	2.8	2.8
	12.5'	61	3.4	3.4

0° Aiming Angle Horizontal Footcandles

Flood	D	FC	L	W
	5.0'	293	2.1	2.1
	7.5'	130	3.2	3.2
	10.0'	73	4.3	4.3
	12.5'	47	5.3	5.3

0° Aiming Angle Horizontal Footcandles

Wide Flood	D	FC	L	W
	5.0'	150	3.0	3.0
	7.5'	67	4.4	4.4
	10.0'	38	5.8	5.8
	12.5'	24	7.3	7.3

0° Aiming Angle Horizontal Footcandles

Very Wide Flood	D	FC	L	W
	5.0'	95	4.0	4.0
	7.5'	42	6.1	6.1
	10.0'	24	8.2	8.2
	12.5'	15	10.3	10.5

PROJECT:

TYPE:

Performance Data - Round Adjustable (SOL-RA with approx. 20° Tilt Angle)


Multiplying Factors: (Multiplying Factor is based on 3000K-83 120V IES file on website)

Wattage:	8W	12W	17W
Factor:	0.53	0.78	1.0


Lens:	Solite
Factor:	0.95

CCT:	2700K-83	3000K-83	3500K-83	4000K-83	2700K-90+	3000K-90+	3500K-90+	4000K-90+	CRISP	3CLA
Factor:	0.98	1.0	1.02	1.04	0.84	0.87	0.90	0.91	0.65	0.70


17W LED, 3000K-83, 0° Tilt Angle




Candelas at Nadir	
Deg	Candela
0	826
5	1411
15	4781
25	8076
35	1623
45	67



Candelas at Nadir	
Deg	Candela
0	748
5	2033
15	5526
25	6833
35	3156
45	234



Candelas at Nadir	
Deg	Candela
0	1120
5	1920
15	3353
25	3566
35	2302
45	342



Candelas at Nadir	
Deg	Candela
0	1496
5	1788
15	2369
25	2241
35	1828
45	430

Application Data - Round Adjustable (SOL-RA with approx. 20° Tilt Angle)

Notes and Definitions:


Beam spread is to 50% center beam candlepower (CBCP).

D=Distance to floor or wall.

FC=Footcandles on floor or wall at center beam aiming location.

L=Effective Visual Beam length in feet (50% of maximum footcandle level).

W=Effective Visual Beam width in feet (50% of maximum footcandle level).



23° Aiming Angle Horizontal Footcandles

Spot	D	FC	L	W	CB
	5.0'	267	1.5	1.4	2.0
7.5'	119	2.6	1.9	3.0	
10.0'	67	3.3	2.7	4.0	
12.5'	43	4.1	3.3	5.0	

23° Aiming Angle Horizontal Footcandles

Flood	D	FC	L	W	OB
	5.0'	226	2.4	2.3	2.0
7.5'	100	3.6	3.3	3.0	
10.0'	57	4.8	4.4	4.0	
12.5'	36	6.0	5.5	5.0	

23° Aiming Angle Horizontal Footcandles

Wide Flood	D	FC	L	W	OB
	5.0'	117	3.1	3.0	2.0
7.5'	54	4.6	4.3	2.0	
10.0'	31	6.1	5.7	3.0	
12.5'	20	7.7	7.2	4.0	

23° Aiming Angle Horizontal Footcandles

Very Wide Flood	D	FC	L	W	OB
	5.0'	83	3.8	3.8	1.0
7.5'	38	5.6	5.9	2.0	
10.0'	21	7.7	8.0	3.0	
12.5'	14	9.6	10.1	3.0	

23° Aiming Angle Vertical Footcandles

Spot	D	FC	L	W	CB
	3.0'	53	4.4	2.3	6.5
4.0'	33	5.7	2.9	8.5	
5.0'	23	7.1	3.3	10.5	
6.0'	16	8.5	3.7	12.5	

23° Aiming Angle Vertical Footcandles

Flood	D	FC	L	W	CB
	3.0'	61	4.5	2.9	5.5
4.0'	36	5.9	3.7	6.5	
5.0'	24	7.4	4.5	8.5	
6.0'	17	9.0	5.2	10.5	

23° Aiming Angle Vertical Footcandles

Wide Flood	D	FC	L	W	CB
	3.0'	42	4.2	3.2	4.5
4.0'	25	5.5	4.1	5.5	
5.0'	17	6.5	5.1	7.5	
6.0'	12	8.0	6.1	8.5	

23° Aiming Angle Vertical Footcandles

Very Wide Flood	D	FC	L	W	CB
	3.0'	34	3.7	3.6	4.5
4.0'	22	4.5	4.5	5.5	
5.0'	14	5.6	5.9	6.5	
6.0'	10	6.9	7.0	8.5	

PROJECT:

TYPE:

Performance Data - Round Pinhole Downlight (SOL-RPA)

Multiplying Factors: (Multiplying Factor is based on 3000K-83 120V IES file on website)


Wattage:	8W	12W	17W
Factor:	0.53	0.78	1.0

Lens:	Solite
Factor:	0.95

CCT:	2700K-83	3000K-83	3500K-83	4000K-83	2700K-90+	3000K-90+	3500K-90+	4000K-90+	CRISP	3CLA
Factor:	0.98	1.0	1.02	1.04	0.84	0.87	0.90	0.91	0.65	0.70


17W LED, 3000K-83

0° Tilt Angle
Spot (SP) Distribution, 15°
LTL # 13663493.19
Lumens: 620; lm/W: 36.9



Candelas at Nadir	
Deg	Candela
0	4979
5	3979
15	949
25	42
35	7
45	4

20° (approx.) Tilt Angle
Spot (SP) Distribution, 15°
LTL # 13663493.09
Lumens: 495; lm/W: 29.4

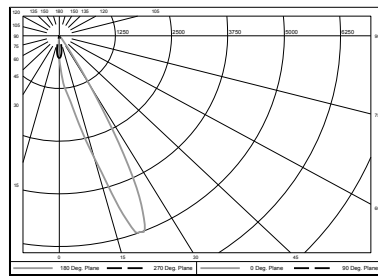

Candelas at Nadir	
Deg	Candela
0	540
5	1181
15	2990
25	4214
35	173
45	16

Application Data - Round Pinhole Downlight (SOL-RPA)

Notes and Definitions:


Beam spread is to 50% center beam candlepower (CBCP).

D=Distance to floor or wall.

FC=Footcandles on floor or wall at center beam aiming location.

L=Effective Visual Beam length in feet (50% of maximum footcandle level).

W=Effective Visual Beam width in feet (50% of maximum footcandle level).



0° Aiming Angle
Horizontal
Footcandles

Spot	D	FC	L	W
5.0'	200	1.5	1.5	
7.5'	89	2.3	2.3	
10.0'	50	3.1	3.1	
12.5'	32	3.7	3.7	



23° Aiming Angle
Horizontal
Footcandles

Spot	D	FC	L	W	CB
5.0'	161	1.5	1.4	2.0	
7.5'	72	2.4	1.9	3.0	
10.0'	40	3.1	2.7	4.0	
12.5'	26	4.0	3.5	5.0	



23° Aiming Angle
Vertical
Footcandles

Spot	D	FC	L	W	CB
3.0'	27	4.0	2.1	6.5	
4.0'	17	5.0	2.8	8.5	
5.0'	11	6.4	3.3	10.5	
6.0'	8	7.9	3.9	12.5	

PROJECT:	TYPE:
-----------------	--------------

Dimming Compatibility

Amerlux® Solace fixtures are compatible with all major dimming protocols prevalent in the United States. Please see below for general compatibilities and wiring diagrams. Amerlux recommends testing your unique dimming configuration as the exact full configuration (Dimmer, Fixture Quantity, Voltage, etc) may affect dimming performance.

--- NOTE: INFORMATION BELOW IS FOR WIRED DIMMERS ONLY. FOR WIRELESS DIMMERS, CONSULT FACTORY ---


TRIAC (Forward Phase) DIMMING (Standard)

Utilizes standard TRIAC dimmers that are in wide use in installations across the US. Best for retrofit applications where TRIAC dimmers are installed.

Notes:

- 120VAC or 277VAC*
- Dims down to 5% light output (most cases)
- Consult Dimming manufacturer for installation instructions - **DO NOT SHARE NEUTRALS!**
- Must meet dimmer Minimum Load Requirements per dimming manufacturer

TRIAC Wiring Diagram

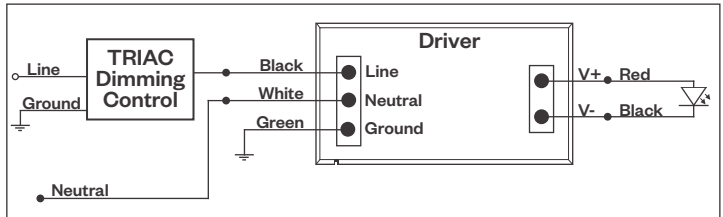

Compatible Dimmers†:	
Wall Box (TRIAC 120VAC)	Central System
Lutron "Diva"	Lutron "GP" Panel
Lutron "Nova-T"	Lutron Grafik Eye QS
Lutron "Maestro"	
Lutron "Skylark"	


ELV - Electronic Low Voltage (Reverse Phase) DIMMING (Standard)

Utilizes specialized "ELV" dimmers.

Notes:

- 120VAC or 277VAC*
- Dims down to 5% light output (most cases)
- Consult Dimming manufacturer for installation instructions - **DO NOT SHARE NEUTRALS!**
- Must meet dimmer Minimum Load Requirements per dimming manufacturer

ELV Wiring Diagram

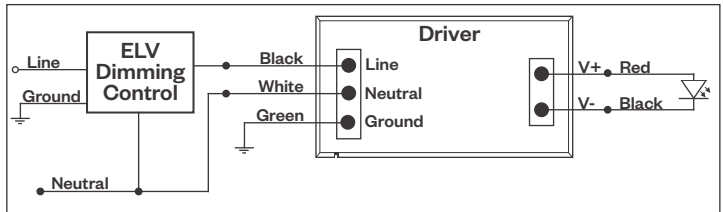

Compatible Dimmers†:		
Wall Box (ELV 120VAC)	Wall Box (ELV 277VAC)	Central System
Lutron "Diva"	Leviton Revoir II AWSMT-E	Lutron "GP" Panel with PHPM-PA 120/277VAC
Lutron "Nova-T"		Lutron Grafik Eye QS with PHPM-PA 120/277VAC
Lutron "Maestro"		
Lutron "Skylark"		
Leviton "Surslide"		
Leviton "Vizio"		

Notes:
 * Driver is 277VAC dimmable with appropriate dimmer (by others). All provided wiring diagrams show 120VAC wiring colors and method. Please refer to 277VAC dimmer installation instructions for 277VAC wiring diagrams.
 † The absence of a dimmer from the lists above does not imply incompatibility. Please consult factory for compatibility inquiries.

PROJECT:

TYPE:

Dimming Compatibility *(continued)*

Amerlux® Solace fixtures are compatible with all major dimming protocols prevalent in the United States. Please see below for general compatibilities and wiring diagrams. Amerlux recommends testing your unique dimming configuration as the exact full configuration (Dimmer, Fixture Quantity, Voltage, etc) may affect dimming performance.

--- NOTE: INFORMATION BELOW IS FOR WIRED DIMMERS ONLY. FOR WIRELESS DIMMERS, CONSULT FACTORY ---


0-10V DIMMING

Integrates into a variety of building management and daylighting controls

Notes:

- 120VAC or 277VAC*
- Dims down to 1% light output
- Requires interface to turn off power to driver
- Consult Dimming manufacturer for installation instructions - **DO NOT SHARE NEUTRALS!**

0-10V Wiring Diagram

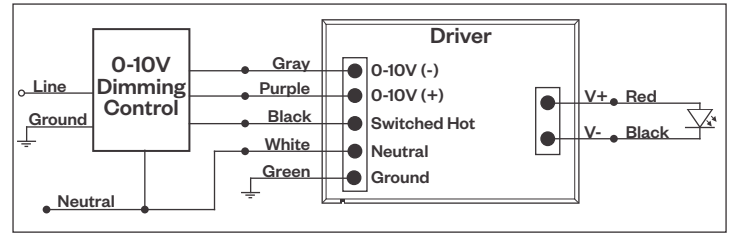

Compatible Dimmers*:

Wall Box

Lutron "Diva" - DVSTV | Leviton Renoir II 0-10V

Central System

Lutron Grafik Eye with GRX-TVI Interface


LUTRON LDE1 DIMMING

Integrates into Lutron EcoSystem building management

Notes:

- 120VAC or 277VAC*
- Dims down to 1% light output
- EcoSystem Control
- Consult Dimming manufacturer for installation instructions - **DO NOT SHARE NEUTRALS!**

LDE1 (HILUME-H-ECO) EcoSystem Digital Control Wiring Diagram

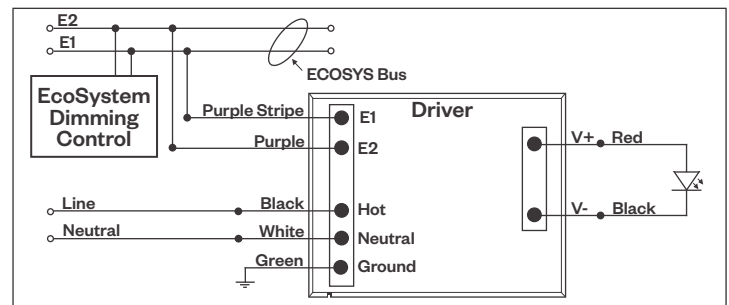

Compatible Dimmers*:

Lutron ECO System

Central System

Pow Pak Dimming Modules	Lutron EcoSystem compatible controls
Energj Savr Node	
Grafik Eye QS/Homeworks	
QS Control Unit	
Quantum Hub	
Homeworks QS/My Room	

Notes:

* Driver is 277VAC dimmable with appropriate dimmer (by others). All provided wiring diagrams show 120VAC wiring colors and method. Please refer to 277VAC dimmer installation instructions for 277VAC wiring diagrams.

† The absence of a dimmer from the lists above does not imply incompatibility. Please consult factory for compatibility inquiries.